

POLY-CRYSTALLINE SOLAR MODULE - 72 CELLS


- **OS270P**
- **OS275P**
- **OS280P**
- **OS285P**

FEATURES

- High reliability with guaranteed 0 to +5% power output tolerance
- Passing mechanical load test of 5400 Pa to withstand heavier snow load and 2400 Pa to withstand wind pressure. Strong frame, easy to install
- High transparency tempered glass: 3.2 mm, with durable glass surface
- Excellent performance under low light environment
- Power series ranging from 260 to 300 watts meet different customers demands
- International quality and safety certifications


WARRANTIES

- 10 years limited product warranty
- 5 years at 95% of the minimal rated power output
- 10 years at 90% of the minimal rated power output
- 18 years at 85% of the minimal rated power output
- 25 years at 80% of the minimal rated power output

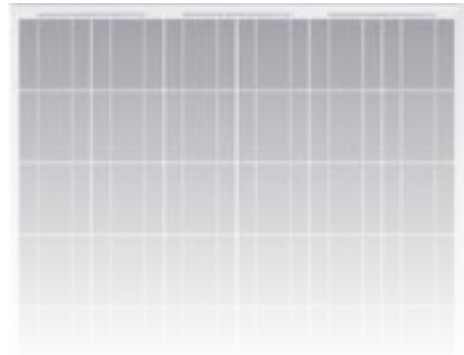

ELETRICAL CHARACTERISTICS*	OS270P	OS275P	OS280P	OS285P
Nominal Output (Pmax) [W]	270	275	280	285
Flash Test Power Classification [%]	0 / +5	0 / +5	0 / +5	0 / +5
Voltage at Pmax (Vmp) [V]	35.5	35.5	36	36
Current at Pmax (Imp) [A]	7.61	7.75	7.78	7.92
Open Circuit Voltage (Voc) [V]	44	44	44.6	44.6
Short Circuit Current (Isc) [A]	8.14	8.3	8.4	8.55
Maximum System Voltage [V]	IEC: 1000 / UL: 600			
Maximum Series Fuse Rating [A]	12			
Cell Efficiency [%]	15.41	15.69	15.98	16.27
Module Efficiency [%]	13.92	14.17	14.43	14.69

STC* (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

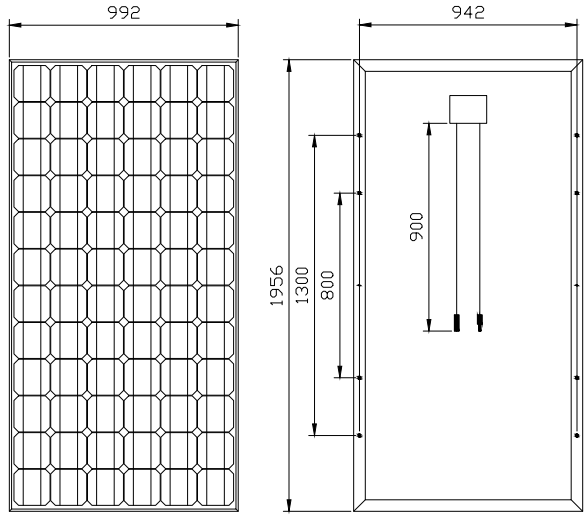TEMPERATURE CHARACTERISTICS		DIMENSIONS	
NOCT**	45±2 °C		
Temperature Coefficient of Pmax	-0.45 %/°C		
Temperature Coefficient of Voc	-0.35 %/°C		
Temperature Coefficient of Isc	0.05 %/°C		
Operating Temperature	-40 °C to +85 °C		
MECHANICAL CHARACTERISTICS			
Solar Cells	72(6x12) poly-crystalline cells 156 mm		
Front Cover	3.2 mm thick, low iron tempered glass		
Back Cover	TPT (Tedlar-PET-Tedlar)		
Encapsulant	EVA (Ethylene vinyl acetate)		
Frame	Anodized aluminium alloy, double wall		
Diodes	6 Bypass diodes serviceable		
Junction Box	IP65 rated		
Connector	MC4 or compatible connector		
Cables	Length: 900 mm / Section: 4.0 mm ²		
Dimension [mm]	1956 x 992 x 50		
Weight [kg]	22.5		
Max. Load	Certified to 2400 Pa		

NOCT**: Nominal Operation Cell Temperature Sun 800W/m², Air 20°C, Wind speed 1m/s

CURRENT / VOLTAGE CHARACTERISTICS

