

## Technical Specifications



	190 watt	180 watt	170 watt
Power (Pm) in Watts (nominal)	190 (0 ~+3%)	180 (0 ~+3%)	170 (0 ~+3%)
Open Circuit Voltage (Voc) in Volts	33	32	32
Short Circuit Current (Isc) in Amps	7.4	7.25	6.9
Voltage at Maximum Power (Vmp) in Volts	27	26.5	26
Current at Maximum Power (Imp) in Amps	7.0	6.79	6.5
Maximum System Voltage	1000V	1000V	1000V
Solar Cells per Module (Units)	54	54	54
Length x Width x Thickness (L x W x T) mm	1260 x 986 x 35		
Weight – Kg	14.00		
Mounting Holes Pitch (Y) – mm	700		
Mounting Holes Pitch (X) – mm	954		
Area – Sq. M	1.24		
Junction Box	Ip65/4T with Play & Plug connector		

\*All electrical parameters specified at STC: 25°C cell temperature; 1000W/M<sup>2</sup> irradiance; AM 1.5


### Construction Features

Type of cell	156 X 156mm Multi-Crystalline Si
Glass	Tempered & Low Iron
Encapsulate	Ethylene Vinyl Acetate
Frame	Anodized Aluminum
Junction Box	Weather Proof Nylon 6


### Warranty

05 years Product Warranty
12 years – 90% of Power
25 Years – 80% of power

### I-V Curve at STC

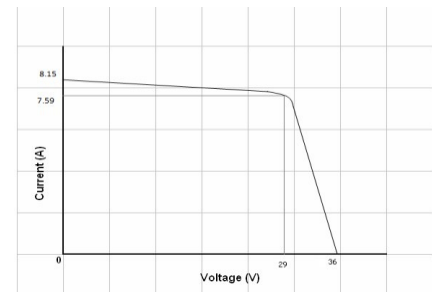

### Mounting Details

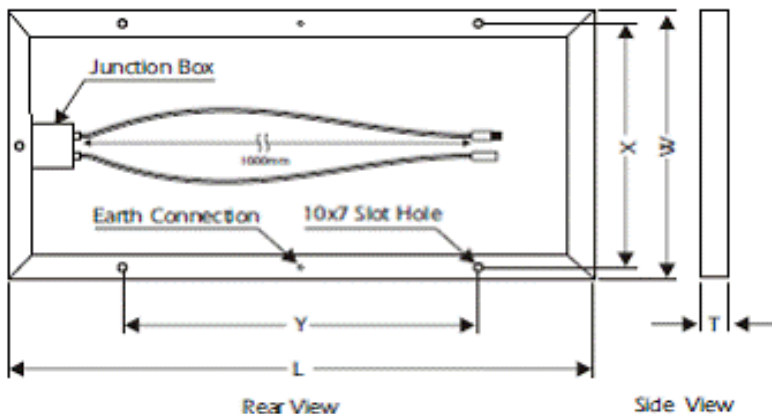

### Temperature Coefficient

Voltage	-0.35% / °C
Current	0.10% / °C
Power	-0.47% / °C
NOCT	47+/-2 °C

\*Due to constant product modifications, Satyam Solar Power Solutions reserves the right to amend the above specifications without prior notice