




MONOCRYSTALLINE SILICON MODULE 65WP SERIES

M6-65 M6-70

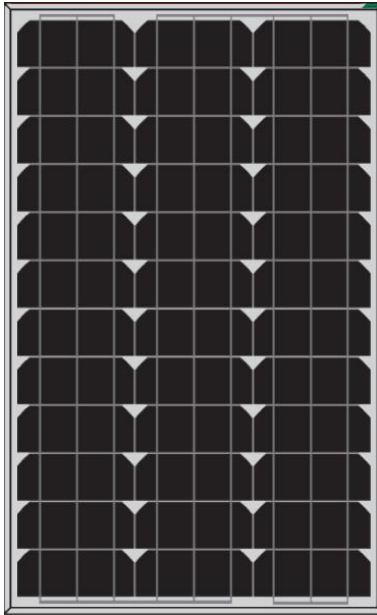

Products Characteristics

- Widely using of the most popular and mature type of modules for off-grid system.
- Leading manufacturing technology in PV industry, strictly control the quality of raw materials and the process of producing.
- 100% EL inspection, ensures modules are defects free.
- Cells binned by current to improve module performance.
- Anti-reflection glass. Not only to increase the light absorption, but also to make the module has the funtion of self-cleaning in water environment, effectively reducing the power loss caused by dust.
- Outstanding performance in low-light irradiance environments.
- Excellent mechanical load resistance: Certified to withstand high wind load(2400pa) and snow loads (5400pa).
- High salt and ammonia resistance.
- Positive power tolerance: 0~+5%.

Warranty

- 10years products warranty.
- 10 years 90%、25 years 80% output power warranty.

PRODUCTS CERTIFICATION


- ISO9001:2008: ISO Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUVCertificate

Raw materials and mechanical para.



6M-65 6M-70

Solar cell dimension (mm)	Mono crystalline156X62.4mm
Solar cell quantity (pcs)	3X12=36
Module dimension (mm)	820X510X30
Module weight (kg)	4.9
Glass	3.2mmTempered Glass
Encapsulation	EVA
Backsheet	Multilayer composite
Aluminium-frame	Silver/black Anodized aluminium alloy
Junction box	IP65/IP67
Cable	NA, but customized is acceptable
Connector	NA, but MC4 or MC4 compatible are acceptable
Package configuration	6pcs/ctn

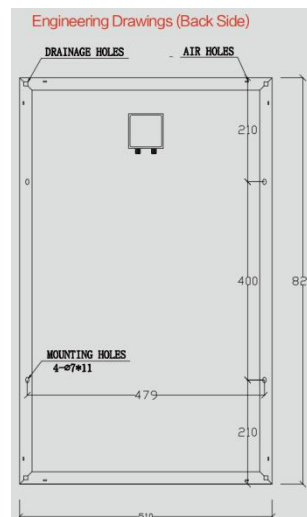

Engineering Drawing (Back Side)

Performance parameters

	6M-65 6M-70
Maximum system voltage	700V
Operating temperature	-45°C~+80°C
Maximum series fuse	10A
Maximum static load, front side (e.x. snow, wind)	5400PA
Maximum static load, back side (e.x. wind)	2400PA
Application grade	Class A

Electrical parameters (Standard test condition)

	6M-65	6M-70
Rated max. Power(Wp)	65W	70W
Power tolerance		0~+5%
Cell efficiency	18.9%	20.2%
Open circuit voltage	22.7V	22.6V
Max. power voltage (Vmp)	17.4V	23.0V
Short circuit current (Isc)	18.6A	18.8A
Max. power current(Imp)	3.49A	3.72A
Temperature coefficient of Isc		+0.06%
Temperature coefficient of Voc		-0.33%
Temperature coefficient of Pmp		-0.45%
Standard test condition	Irradiance: 1000W/M2, Cell temperature 25°C, Spectrum AM: AM1.5	

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.