




MONOCRYSTALLINE SILICON MODULE 260WP SERIES

6M-250 M6-260

Products Characteristics

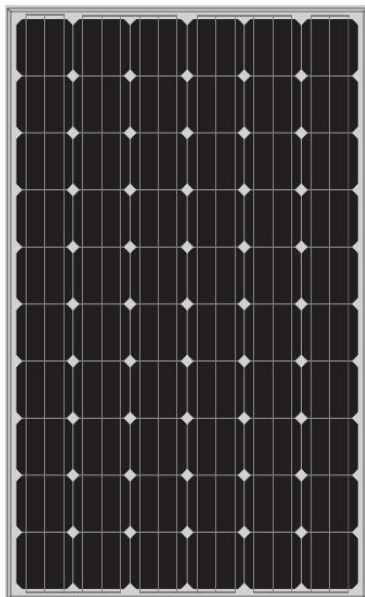

- Widely using of the most popular and mature type of modules for on-grid system.
- Leading manufacturing technology in PV industry, strictly control the quality of raw materials and the process of producing.
- 100% EL inspection, ensures modules are defects free.
- Cells binned by current to improve module performance.
- Anti-reflection glass. Not only to increase the light absorption, but also to make the module has the funtion of self-cleaning in water environment, effectively reducing the power loss caused by dust.
- Outstanding performance in low-light irradiance environments.
- Excellent mechanical load resistance: Certified to withstand high wind load(2400pa) and snow loads (5400pa).
- High salt and ammonia resistance.
- Positive power tolerance: 0~+5%.

Warranty

- 10years products warranty.
- 10 years 90%、25 years 80% output power warranty.


PRODUCTS CERTIFICATION

- ISO9001:2008: ISO Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUVCertificate

Raw materials and mechanical para.



| | 6M-250 6M-260 |
|---------------------------|---------------------------------------|
| Solar cell dimension (mm) | Mono crystalline156X117 |
| Solar cell quantity (pcs) | 6X12=72 |
| Module dimension (mm) | 1640X992X40 |
| Module weight (kg) | 18.8 |
| Glass | 3.2mm Tempered Glass |
| Encapsulation | EVA |
| Backsheet | Multilayer composite |
| Aluminium-frame | Silver/black Anodized aluminium alloy |
| Junction box | IP65/IP67 |
| Cable | 4mm ² ,900mm |
| Connector | MC4 andMC4 Compatible |
| Package configuration | 30/26pcs/pallet |

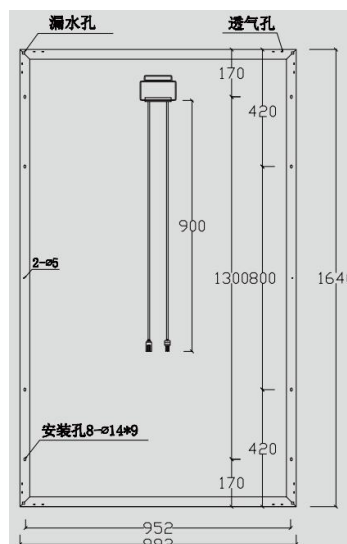

Engineering Drawing (Back Side)

Performance parameters

| | 6M-250 6M-260 |
|---|---------------|
| Maximum system voltage | 1000V |
| Operating temperature | -45°C~+80°C |
| Maximum series fuse | 10A |
| Maximum static load, front side (e.x. snow, wind) | 5400PA |
| Maximum static load, back side (e.x. wind) | 2400PA |
| Applicaition grade | Class A |

Electrical parameters (Standard test condition)

| | 6M-250 | 6M-260 |
|--------------------------------|---|--------|
| Rated max. Power(Wp) | 250W | 260W |
| Power tolerance | 0~+5% | |
| Cell efficiency | 19.2% | 19.8% |
| Open circuit voltage | 46.2V | 46.7V |
| Max. power voltage (Vmp) | 37.4V | 37.9V |
| Short circuit current (Isc) | 7.08A | 7.28A |
| Max. power current(Imp) | 6.68A | 6.87A |
| Temperature coefficient of Isc | 0.06% | |
| Temperature coefficient of Voc | -0.33% | |
| Temperature coefficient of Pmp | -0.45% | |
| Standard test condition | Irradiance: 1000W/M2、Cell temperature 25°C、Spectrum AM: AM1.5 | |

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.