




POLYCRYSTALLINE SILICON MODULE 115W

6P-115 6P-120

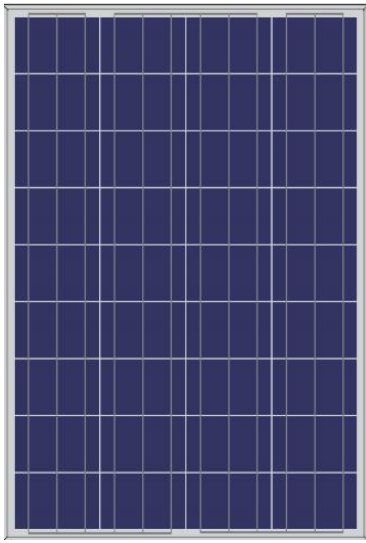

Products Characteristics

- Widely using of the most popular and mature type of modules for off-grid system.
- Leading manufacturing technology in PV industry, strictly control the quality of raw materials and the process of producing.
- 100% EL inspection, ensures modules are defects free.
- Cells binned by current to improve module performance.
- Anti-reflection glass. Not only to increase the light absorption, but also to make the module has the funtion of self-cleaning in water environment, effectively reducing the power loss caused by dust.
- Outstanding performance in low-light irradiance environments.
- Excellent mechanical load resistance: Certified to withstand high wind load(2400pa) and snow loads (5400pa).
- High performance of salt and ammonia resistance.
- Positive power tolerance: 0~+5W.

Warranty


- 10years products warranty.
- 10 years 90%、25 years 80% output power warranty.

PRODUCTS CERTIFICATION

- ISO9001:2008: ISO Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUVCertificate

Raw materials and mechanical para.

	6P-115 6P-120
Solar cell dimension (mm)	Poly crystalline156X117mm
Solar cell quantity (pcs)	4X9=36
Module dimension (mm)	1120X670X30
Module weight (kg)	8.4
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer composite
Aluminium-frame	Silver/black Anodized aluminium alloy
Junction box	IP65/IP67
Cable	NA, but customized is acceptable
Connector	NA, but MC4 or MC4 compatible are acceptable
Package configuration	4pcs/ctn

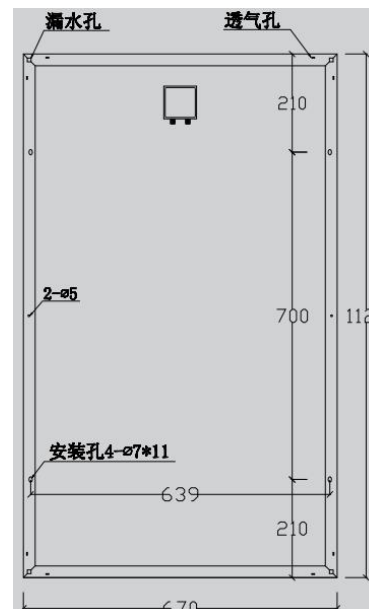

Engineering Drawing (Back Side)

Performance parameters

6P-115 6P-120

Maximum system voltage	700V
Operating temperature	-45°C-+80°C
Maximum series fuse	10A
Maximum static load, front side (e.x. snow, wind)	5400PA
Maximum static load, back side (e.x. wind)	2400PA
Application grade	Class A

Electrical parameters (Standard test condition)

6P-115 6P-120

Rated max. Power(Wp)	115W	120W
Power tolerance	0-+5%	
Cell efficiency	17.6%	18.2%
Open circuit voltage	22.6V	22.9V
Max. power voltage (Vmp)	18.5V	18.7V
Short circuit current (Isc)	6.59A	6.80A
Max. power current(Imp)	6.22A	6.42A
Temperature coefficient of Isc	+0.06%	
Temperature coefficient of Voc	-0.33%	
Temperature coefficient of Pmp	-0.45%	

Rated max. Power(Wp) Irradiance: 1000W/M2, Cell temperature 25°C, Spectrum AM: AM1.5

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.