

JST MODULE


JST240M(60) 240W

JST245M(60) 245W

JST250M(60) 250W

JST255M(60) 255W

JST260M(60) 260W

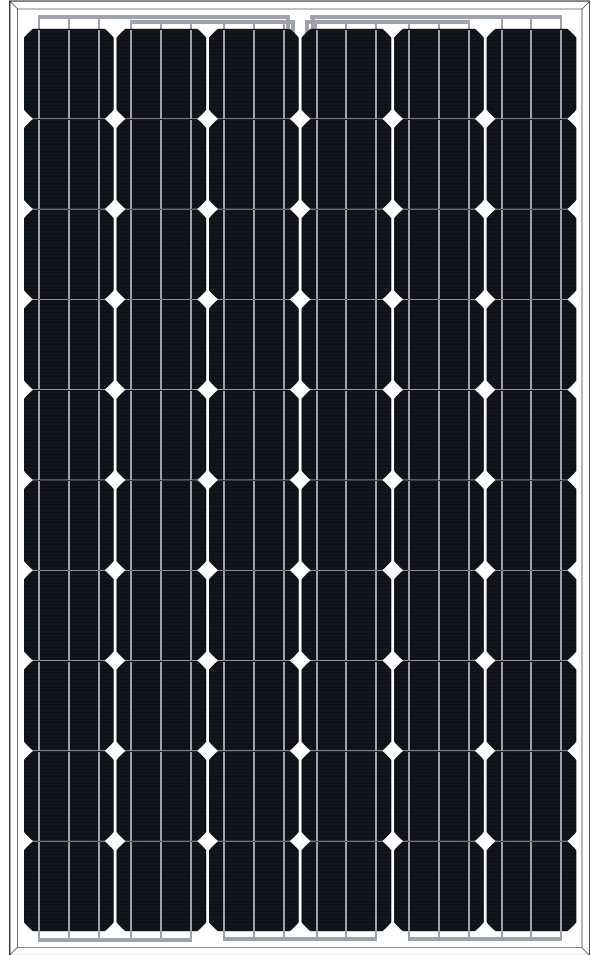

High conversion efficiency
High module efficiency to guarantee power output.



0 to +5W positive tolerance
Detailed information in Electrical Specifications.




Self-cleaning glass
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

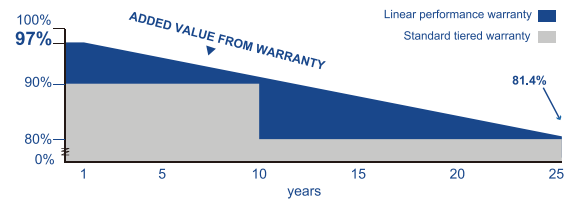

Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.



25-year performance warranty

10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
UL 1703



JST Solar

ELECTRICAL DATA

Model Type	JST240M(60)	JST245M(60)	JST250M(60)	JST255M(60)	JST260M(60)
Peak Power (Pmax)	240W	245W	250W	255W	260W
Module Efficiency	14.75%	15.05%	15.36%	15.67%	15.98%
Maximum Power Voltage (Vmp)	31.4V	31.7V	31.9V	32.2V	32.4V
Maximum Power Current (Imp)	7.63A	7.73A	7.83A	7.93A	8.02A
Open Circuit Voltage (Voc)	37.9V	38.1V	38.4V	38.6V	38.9V
Short Circuit Current (Isc)	8.57A	8.63A	8.69A	8.74A	8.80A
Power Tolerance			0 to +5%		
Maximum System Voltage			1000V		
Nominal Operating Cell Temperature			44.4±2°C		
Maximum Series Fuse Rating			15A		

MECHANICAL DATA

Cell Type	156x156mm
Number of Cells	60 (10x6)
Weight	16.8kg
Dimension	1640x992x40mm
Max Load	5400 Pascals IP67
Junction Box	rated MC4
Connector	Compatible PV
Wire Type	Wire


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

PACKING MANNER


Container	20' GP	40' GP
Pieces per Pallet	26	26
Pieces per Container	308	644

PHYSICAL CHARACTERISTICS

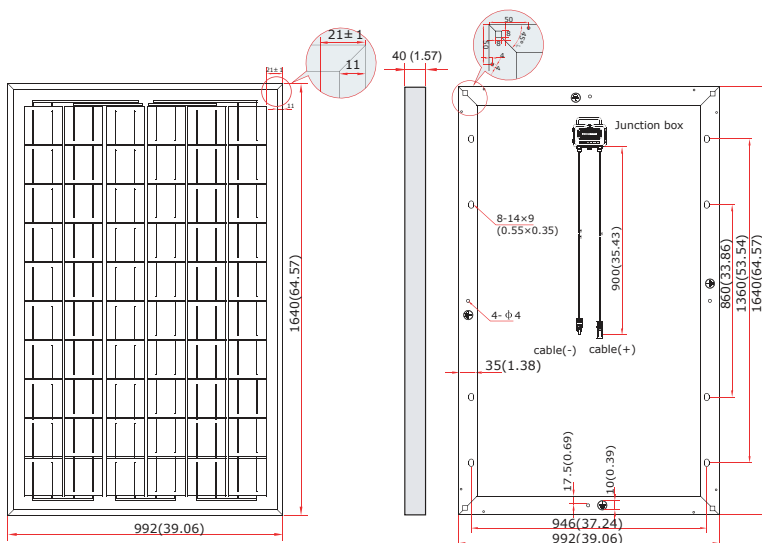


ELECTRICAL CHARACTERISTICS


Current-Voltage & Power-Voltage Curve (AM1.5, Cell Temperature 25°C)

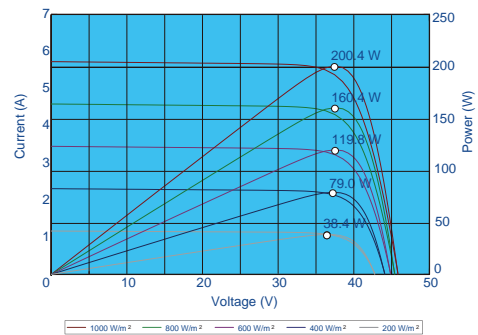

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (Cell Temperature: 25°C)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.