


# JST MODULE

JST10P(36) 10W

JST15P(36) 15W

JST20P(36) 20W

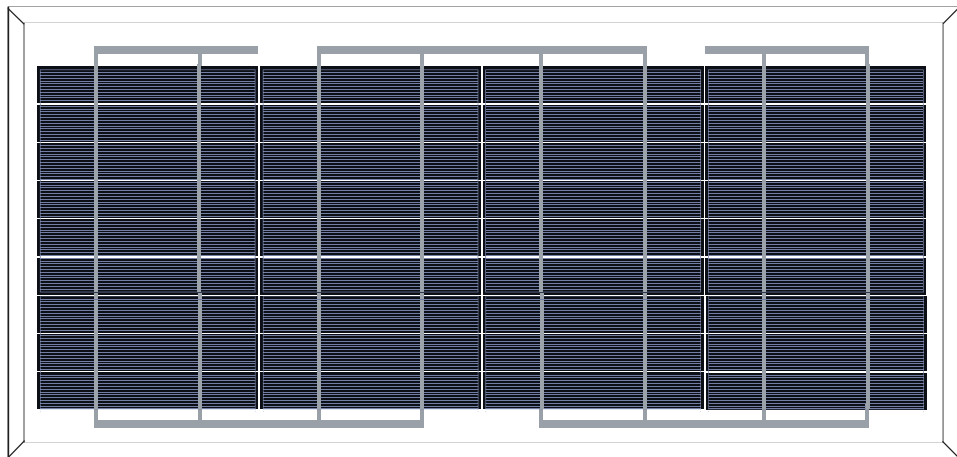

High conversion efficiency  
High module efficiency to guarantee power output.



0 to +5W positive tolerance  
Detailed information in Electrical Specifications.




Self-cleaning glass  
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance  
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

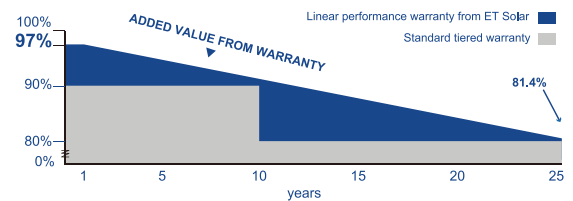

Excellent loading capability  
2400Pa wind loads, 5400Pa snow loads.



25-year performance warranty



10-year warranty on materials and workmanship

IEC 61215 Ed.2  
IEC 61730  
UL 1703



# JST Solar

## ELECTRICAL DATA

Model Type	JST10P(36)	JST15P(36)	JST20P(36)
Peak Power (Pmax)	10W	15W	20W
Module Efficiency	4.69%	7.04%	9.39%
Maximum Power Volage (Vmp)	18.0V	18.1V	18.3V
Maximum Power Current (Imp)	0.56A	0.83A	1.09A
Open Circuit Voltage (Voc)	21.8V	21.9V	22.1V
Short Circuit Current (Isc)	0.65A	0.96A	1.26
Power Tolerance		±3%	
Maximum System Voltage		1000V	
Nominal Operating Cell Temperature		44.4±2°C	
Maximum Series Fuse Rating		15A	

## MECHANICAL DATA

Cell Type	156×156mm
Number of Cells	36 (9×4)
Weight	2kg-10w 2.1kg-20w
Dimension	560×360×25mm
Max Load	5400 Pascals
Junction Box	IP67 rated MC4
Connector	Compatible PV
Wire Type	Wire


## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

## PACKING MANNER


Container	20' GP	40' GP
Pieces per Package	10	10
Pieces per Container	3000	6000

## PHYSICAL CHARACTERISTICS

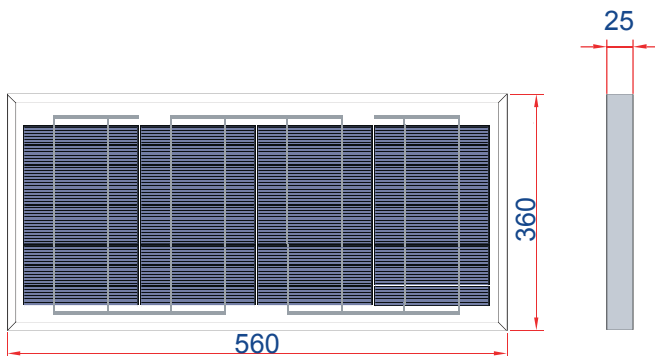


## ELECTRICAL CHARACTERISTICS


Current-Voltage & Power-Voltage Curve (AM1.5, Cell Temperature 25°C)

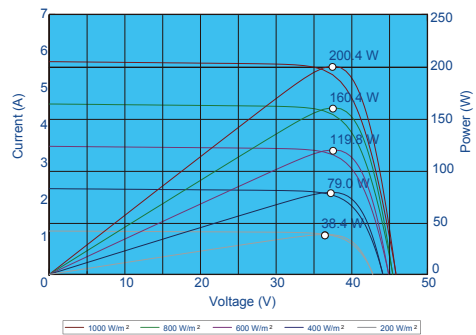

Temperature Dependence of Isc, Voc and Pmax

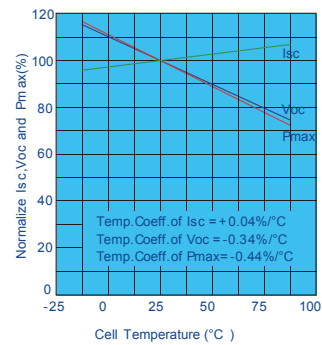

Irradiance Dependence of Isc, Voc and Pmax (Cell Temperature: 25°C)

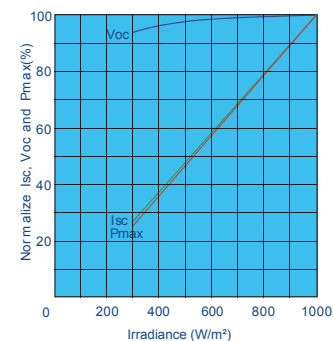

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m<sup>2</sup>, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.  
Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters isfor reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.