

JST MODULE


JST140P(36) 140W

JST145P(36) 145W

JST150P(36) 150W

JST155P(36) 155W

JST160P(36) 160W

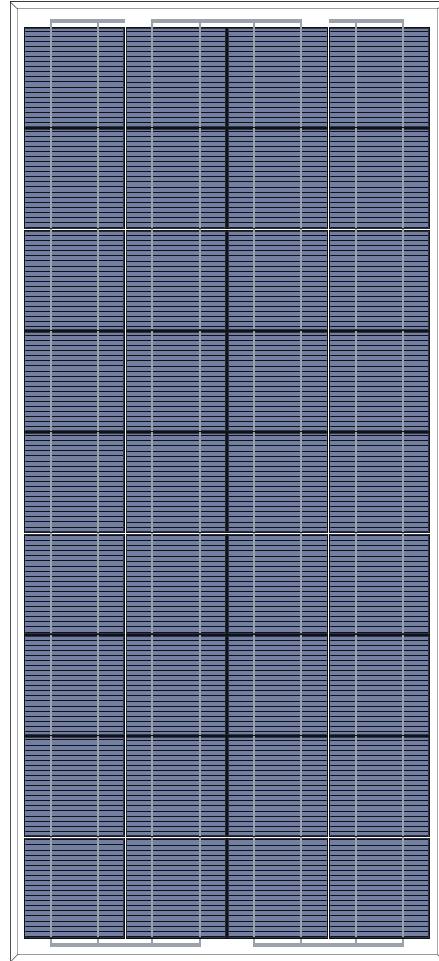

High conversion efficiency
High module efficiency to guarantee power output.



0 to +5W positive tolerance
Detailed information in Electrical Specifications.




Self-cleaning glass
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

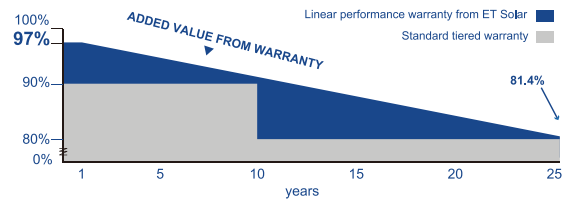

Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.



25-year performance warranty



10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
UL 1703



ELECTRICAL DATA

Model Type	JST140P(36)	JST145P(36)	JST150P(36)	JST155P(36)	JST160P(36)
Peak Power (Pmax)	140W	145W	150W	155W	160W
Module Efficiency	13.97%	14.47%	14.97%	15.47%	15.97%
Maximum Power Voltage (Vmp)	18.9V	19.0V	19.2V	19.3V	19.4V
Maximum Power Current (Imp)	7.42A	7.63A	7.83A	8.03A	8.23A
Open Circuit Voltage (Voc)	22.7V	22.9V	23.0V	23.2V	23.3V
Short Circuit Current (Isc)	8.33A	8.51A	8.69A	8.86A	9.02A
Power Tolerance			±3%		
Maximum System Voltage			1000V		
Nominal Operating Cell Temperature			44.4±2°C		
Maximum Series Fuse Rating			15A		

MECHANICAL DATA

Cell Type	156×156mm
Number of Cells	36 (9×4)
Weight	11kg
Dimension	1480×670×35mm
Max Load	5400 Pascals IP67
Junction Box	rated MC4
Connector	Compatible PV
Wire Type	Wire


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

PACKING MANNER


Container	20' GP	40' GP
Pieces per Pallet	30	30
Pieces per Container	570	1700

PHYSICAL CHARACTERISTICS

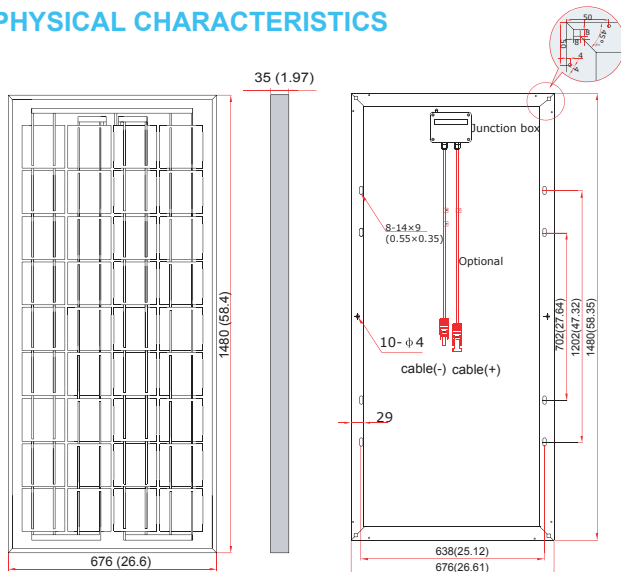


ELECTRICAL CHARACTERISTICS


Current-Voltage & Power-Voltage Curve (AM1.5, Cell Temperature 25°C)

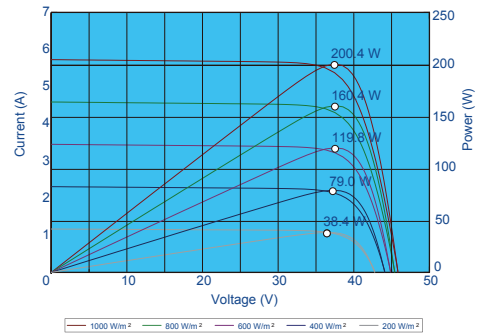

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (Cell Temperature: 25°C)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.
Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.