



RNG-50P

50W Polycrystalline Solar Panel

Key Features

Sleek design and a durable frame, the Renogy 50 Watt 12 Volt polycrystalline panel provides you with the highest efficiency per area and is the perfect item for off-grid applications.

- High module conversion efficiency
- Top ranked PTC rating
- Quick and inexpensive mounting
- 100% EL testing on all Renogy modules
- No hot spots guaranteed

Potential Uses

The Renogy 50 Watt polycrystalline Panel can be used in various off-grid applications that include 12 and 24 volts arrays, water pumping systems, signaling systems and other off-grid application.



Power Output Warranty



Material and Workmanship Warranty

RNG-50P

50W Polycrystalline Solar Panel

Electrical Data

Maximum Power at STC*	50 W
Optimum Operating Voltage (V_{mp})	17.8 V
Optimum Operating Current (I_{mp})	2.80 A
Open Circuit Voltage (V_{oc})	22.4 V
Short Circuit Voltage (I_{sc})	2.95 A
Module Efficiency	13.37%
Maximum System Voltage	600 VDC UL
Maximum Series Fuse Rating	15 A


Thermal Characteristics

Operating Module Temperature	-40°C to +80°C
Nominal Operating Cell Temperature (NOCT)	47±2°C
Temperature Coefficient of Pmax	-0.44%/°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Isc	0.04%/°C

Junction Box

IP Rating	IP 65
Diode Type	HY 10SQ05
Number of Diodes	1 Diode(s)
Output Cables	14 AWG (1.12 ft long)

Module Diagram

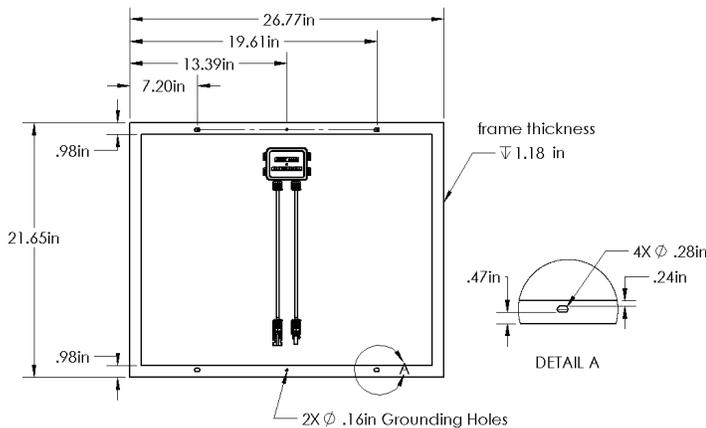

Mechanical Data

Solar Cell Type	Polycrystalline (6.10 x 2.05 in)
Number of Cells	36 (4 x 9)
Dimensions	21.6 x 26.7 x 1.2 in (550 x 680 x 30 mm)
Weight	11 lbs (5 kg)
Front Glass	Tempered Glass 0.13 in (3.2 mm)
Frame	Anodized Aluminium Alloy
Connectors	MC4 Connectors
Fire Rating	Class C

MC4 Connectors


Rated Current	30A
Maximum Voltage	1000VDC
Maximum AWG Size Range	10 AWG
Temperature Range	-40°F to 194°F
IP Rating	IP 67

Certifications



IV-Curve

RNG-50P Characteristics Versus Voltage

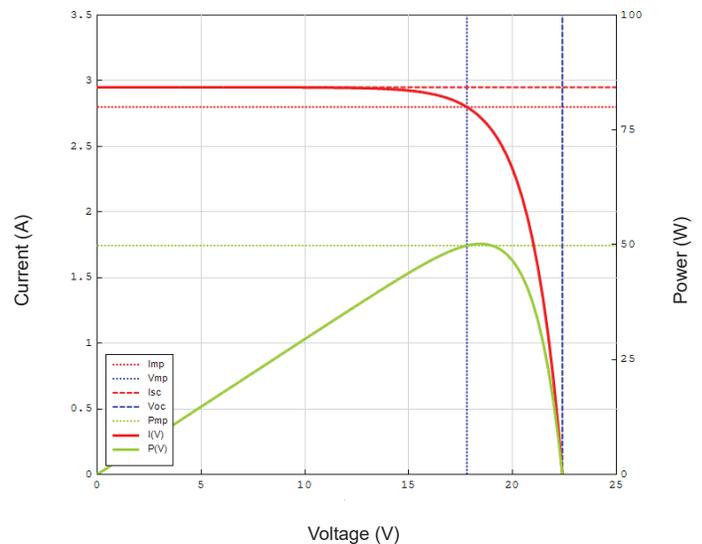

*All specifications and data described in this data sheet are tested under Standard Test Conditions (STC - Irradiance: 1000W/m², Temperature: 25°C, Air Mass: 1.5) and may deviate marginally from actual values. Renogy and any of its affiliates has reserved the right to make any modifications to the information on this data sheet without notice. It is our goal to supply our customers with the most recent information regarding our products. These data sheets can be found in the downloads section of our website, www.renogy-store.com