


INFINITY MODULE

260W
6MB SERIES
260W-275W

MONOCRYSTALLINE SOLAR MODULE

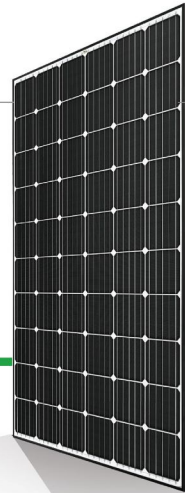

60 CELL
MONOCRYSTALLINE MODULE

260-275W
POWER OUTPUT RANGE

16.8%
MAXIMUM EFFICIENCY

0 to +5%
POSITIVE POWER TOLERANCE

CERTIFICATION



www.infineitynewenergy.com



Maximize Limited Space with top-end efficiency

- Up to 168 W/m² power density
- Low thermal coefficients for greater energy production at high operating temperatures



Good aesthetics for residential applications

- Dark mono cells
- Black frame



Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface field
- Selective emitter



Highly reliable due to stringent quality control

- All modules have to pass electroluminescence (EL) inspection
- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant




Certified to withstand challenging environmental conditions


- 35 mm hail stones at 97 km/h

LINEAR PERFORMANCE WARRANTY


12 Year Product Warranty • 25 Year Linear Power Warranty

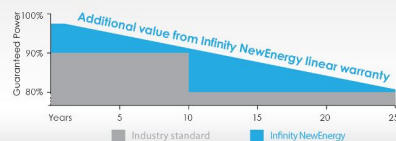


DIMENSIONS OF PV MODULE INE-6MB

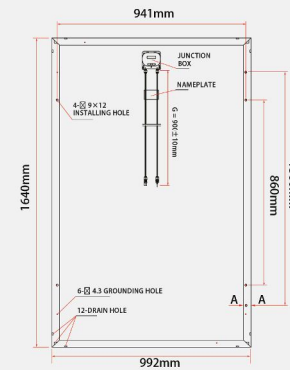


Back View



I-V CURVES OF PV MODULE INE-6MB



Dealer Information



Infineity New Energy Co., Ltd
Add.: Jintao Road, Zhouzhuang, Jiangyin City,
Jiangsu Province, China 214423

ELECTRICAL DATA @ STC

	INE-260-6MB	INE-265-6MB	INE-270-6MB	INE-275-6MB
Peak Power Watts-P _{MAX} (Wp)	260	265	270	275
Power Output Tolerance-P _{MAX} (%)	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage-V _{MPP} (V)	30.7	30.7	30.8	31.2
Maximum Power Current-I _{MPP} (A)	8.49	8.63	8.77	8.82
Open Circuit Voltage-V _{OC} (V)	38.5	38.5	38.6	38.7
Short Circuit Current-I _{SC} (A)	9.01	9.10	9.23	9.26
Module Efficiency η _m (%)	15.9	16.2	16.5	16.8

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Average efficiency reduction of 4.5% at 200 W/m² according to EN 60904-1.

ELECTRICAL DATA @ NOCT

	INE-260-6MB	INE-265-6MB	INE-270-6MB	INE-275-6MB
Maximum Power-P _{MAX} (Wp)	194	197	201	205
Maximum Power Voltage-V _{MPP} (V)	28.4	28.5	28.6	29.0
Maximum Power Current-I _{MPP} (A)	6.82	6.92	7.02	7.08
Open Circuit Voltage-V _{OC} (V)	35.7	35.8	35.8	35.9
Short Circuit Current-I _{SC} (A)	7.28	7.35	7.45	7.48

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline 156 x 156 mm
Cell Orientation	60 cells (6 x 10)
Module Dimensions	1640 x 992 x 35mm
Weight	18.2 kg
Glass	High Transparency, Anti-Reflective, AR Coated and Heat Tempered Solar Glass - 3.2mm
Backsheet	White
Frame	Black Anodized Aluminium Alloy (Silver Available)
J-Box	IP 67 rated
Cables	Photovoltaic Technology cable 4.0 mm ² , 900mm(Customized Available)
Connector	MC4 Compatible

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	44°C (±2K)
Temperature Coefficient of P _{MAX}	-0.40%/K
Temperature Coefficient of V _{OC}	-0.31%/K
Temperature Coefficient of I _{SC}	0.05%/K

MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1000V DC (IEC)
Max Series Fuse Rating	15A
Mechanical Load	5400pa
Wind Load	2400pa

PACKAGING CONFIGURATION

Modules per box:	30 pieces
Modules per 40' container:	840 pieces

WARRANTY

12 year Product Workmanship Warranty
25 year Linear Performance Warranty
(Please refer to product warranty for details)

INSURANCE

Product liability insurance with CHUBB Group
Product performance (E&O) insurance CHUBB Group

Http://www.infineitynewenergy.com
E-mail:sales@infineitynewenergy.com
Tel:0086-510-86977681
Fax:0086-510-86905687

Infineity NewEnergy - Make Things Better