


Raw materials and Mechanical Parameters

	P6-80	P6-85
Type of Cells(mm)	poly156 × 89.1	
NO. of Cells and Connections	4 × 9=36	
Dimensions(mm)(L*W*H)	870 × 670 × 30	
Weight(kg)	6.5	
Glass	3.2mm Tempered Glass	
Encapsulation	EVA	
Backsheet	Multilayer Composite	
Aluminium-Frame	Silvery/Black Anodized aluminium alloy	
Junction-Box	IP65/IP67	
Cable	NA, but customized is acceptable	
Connector	NA, but MC4 and MC4 Compatible are acceptable	
Package Configuration	6pcs/ctn	


▼ Engineering Drawings (Front Side)

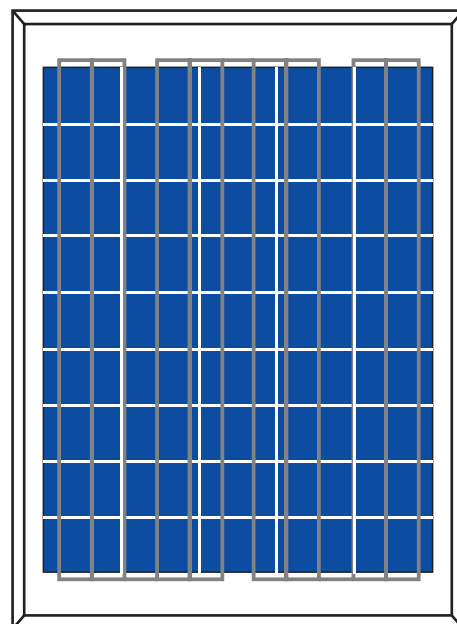

Performance Parameters

	P6-80	P6-85
Maximum System Voltage	700V	
Operating Temperature	-45~+80℃	
Maximum Series Fuse	10A	
Maximum Static Load,Front Side (e.x. Snow,Wind)	5400PA	
Maximum Static Load, Back Side(e.x. Wind)	2400PA	
Application Grade	Class A	

▼ Engineering Drawings (Back Side)

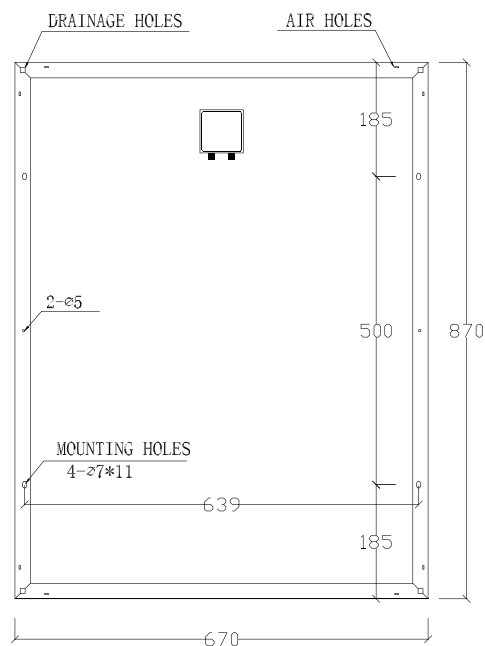

Electrical Parameters (Standard Test Condition)

	P6-80	P6-85
Rated Maximum Power(Mp)	80W	85W
Power Tolerance	0- +5W	
Cell Efficiency	16.0%	17.0%
Open Circuit Voltage(Voc)	22.4V	22.4V
Maximum Power Voltage(Vmp)	17.4V	17.4V
Short Circuit Current(Isc)	4.91A	5.22A
Maximum Power Current(Imp)	4.60A	4.89A
Temperature Coefficient of Isc	+0.06%	
Temperature Coefficient of Voc	-0.33%	
Temperature Coefficient of Pmp	-0.45%	
Standard Test Condition	Irradiance:1000W/M2,Cell Temperature:25℃,Spectrum AM:1.5	

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.