


UKS-6P-DG DOUBLE GLASS MODULE

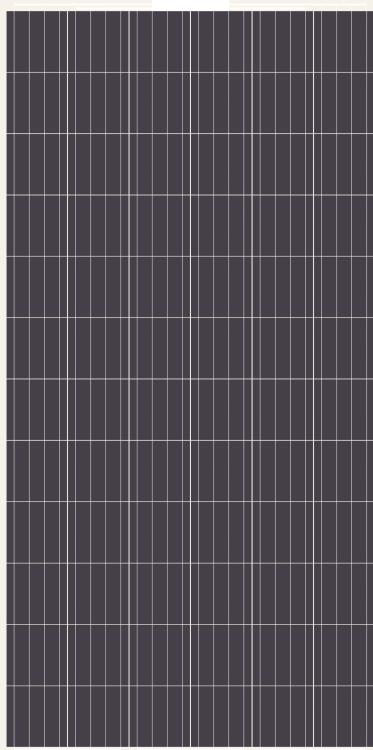

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 17.09% by using high efficient solar cells and advanced manufacturing technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc.).
- Fire Class A certified according to IEC 61730-2/MST 23.
- Potential induced degradation (PID) free.
- Positive power tolerance of 0 ~ +3 %.


CERTIFICATIONS

- IEC61215, IEC61730, CE
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- 10 years limited product warranty.
- Limited linear power warranty: 30 years 80% of the nominal power output.

PROUD TO SUPPORT

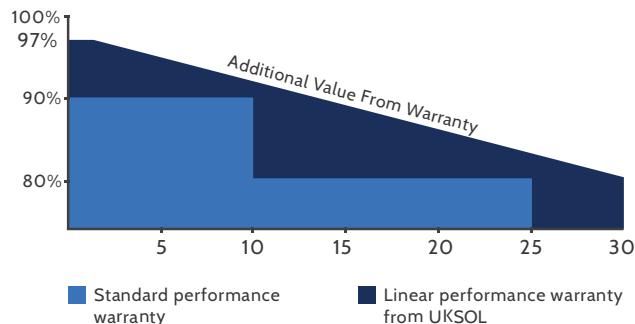

LOW RISK BRITISH
PROCUREMENT



BRITISH TECHNICAL
SUPPORT



ALWAYS GRADE
"A" CELLS



BRITISH QUALITY
STANDARDS



ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P _{max})	310W	315W	320W	325W	330W	335W
Open Circuit Voltage (V _{oc})	45.6V	45.8V	46.0V	46.2V	46.4V	46.6V
Short Circuit Current (I _{sc})	8.82A	8.90A	8.98A	9.06A	9.14A	9.22A
Voltage at Nominal Power (V _{mp})	37.6V	37.8V	38.0V	38.2V	38.4V	38.6V
Current at Nominal Power (I _{mp})	8.25A	8.34A	8.43A	8.51A	8.60A	8.68A
Module Efficiency (%)	15.81	16.07	16.32	16.58	16.84	17.09
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1000V DC					
Fire Resistance Rating	Class A (IEC61730)					
Maximum Series Fuse Rating	15A					

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P _{max})	229W	233W	237W	241W	244W	248W
Open Circuit Voltage (V _{oc})	42.0V	42.2V	42.4V	42.6V	42.8V	43.0V
Short Circuit Current (I _{sc})	7.14A	7.21A	7.27A	7.34A	7.40A	7.47A
Voltage at Nominal Power (V _{mp})	34.2V	34.4V	34.6V	34.8V	35.0V	35.2V
Current at Nominal Power (I _{mp})	6.70A	6.78A	6.85A	6.93A	6.98A	7.05A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Polycrystalline 156.75x156.75mm
Number of cells	72 (6x12)
Module dimensions	1980x990x5mm (Without junction box)
Weight	23.3kg
Front Glass	2mm Tempered glass with AR coating
Back Glass	2mm Tempered glass/2mm Ceramic coated glass
Junction box	IP67, 3 diodes
Cable	4mm ²
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P _{max}	-0.40%/°C
Temperature Coefficients of V _{oc}	-0.31%/°C
Temperature Coefficients of I _{sc}	0.03%/°C


PACKAGING

Standard packaging	38pcs/pallet
Module quantity per 20' container	380pcs
Module quantity per 40' container	836pcs


ENGINEERING DRAWINGS

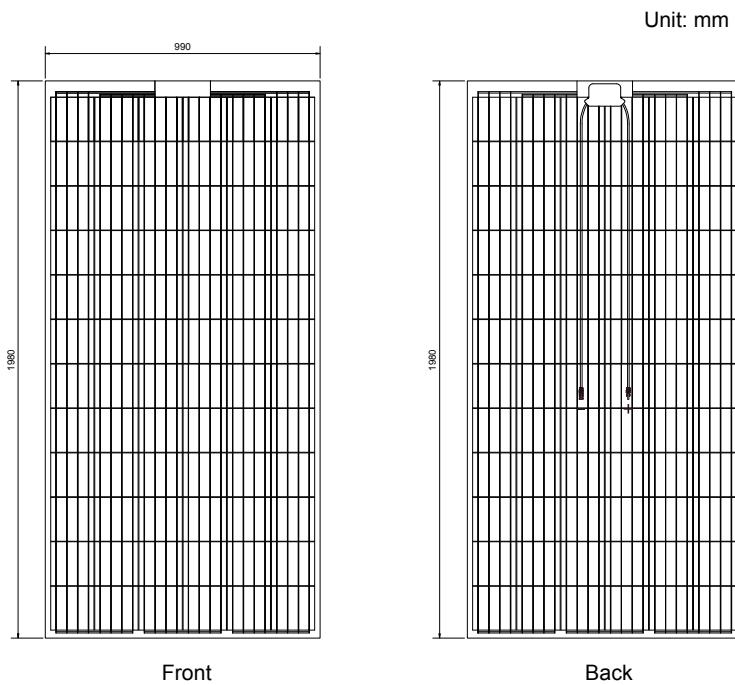

IV CURVES

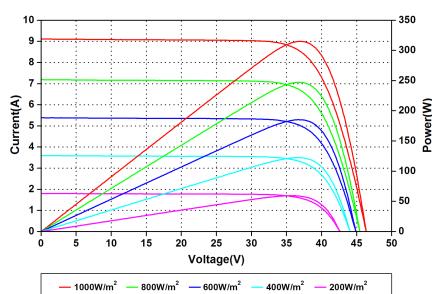

Current-Voltage and Power-Voltage Curves at Different Irradiances

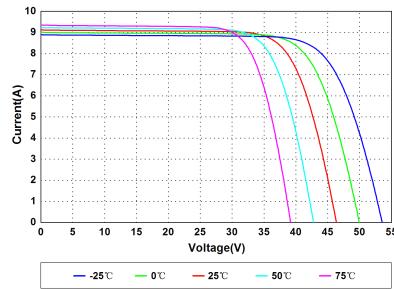

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.

+44 (0)1753 910327 | info@uksol.uk | www.uksol.uk | WhatsApp: +44 (0)7949 489911

UKSOL and the UKSOL logo are registered trademarks of UKSOL Ltd.