

**YLM
72 CELL
1500V**




19.9%
CELL EFFICIENCY

10 YEAR
PRODUCT WARRANTY

0-5W
POWER TOLERANCE

25 Years Linear Warranty

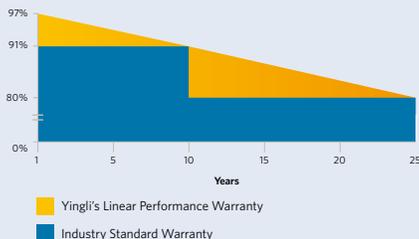

**HIGH VOLTAGE
LESS SYSTEM COST**

With a maximum system voltage of 1500 volts, the next generation YLM 1500V Series Modules reduce balance-of-system costs and increase system-level energy yield in large-scale power plants.



Costing Saving

As YLM 1500V Series modules are allowing more modules per string the balance-of-system costs are reduced by less required combiner boxes, fuses and cables in large-scale projects.



Increased Energy Yield

By the higher system voltage line losses in cabling are reduced and the inverter efficiency is increased. This results in an up to 2% higher yield.



High Power Density

High conversion efficiency and more power output per square meter.



Durability

Durable PV modules, independently tested for harsh environmental conditions such as exposure to salt mist, ammonia and known PID risk factors.

Yingli Green Energy

Yingli Green Energy Holding Company Limited (NYSE: YGE), known as "Yingli Solar," is one of the world's leading solar panel manufacturers with the mission to provide affordable green energy for all. Deploying more than 17 GW solar panels worldwide, Yingli Solar makes solar power possible for communities everywhere by using our global manufacturing and logistics expertise to address unique local challenges.

YLM 72 CELL 1500V

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

Module type	YLxxxD-36b 1500V (xxx=P _{max})							
	P _{max}	W	350	345	340	335	330	325
Power output	P _{max}	W	350	345	340	335	330	325
Power output tolerances	ΔP _{max}	W	0/+5					
Module efficiency	η _m	%	18.0	17.7	17.5	17.2	17.0	16.7
Voltage at P _{max}	V _{mpp}	V	38.6	38.3	37.9	37.6	37.2	36.9
Current at P _{max}	I _{mpp}	A	9.07	9.02	8.97	8.91	8.86	8.81
Open-circuit voltage	V _{oc}	V	48.0	47.7	47.3	46.9	46.6	46.2
Short-circuit current	I _{sc}	A	9.41	9.38	9.35	9.32	9.29	9.27

STC: 1000W/m² irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.0% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	YLxxxD-36b 1500V (xxx=P _{max})							
	P _{max}	W	255.3	251.7	248.0	244.4	240.7	237.1
Voltage at P _{max}	V _{mpp}	V	35.2	34.9	34.6	34.3	34.0	33.6
Current at P _{max}	I _{mpp}	A	7.26	7.22	7.18	7.13	7.09	7.05
Open-circuit voltage	V _{oc}	V	44.3	44.0	43.7	43.3	43.0	42.7
Short-circuit current	I _{sc}	A	7.61	7.58	7.56	7.53	7.51	7.49

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	46 +/- 2
Temperature coefficient of P _{max}	γ	%/°C	-0.42
Temperature coefficient of V _{oc}	β _{Voc}	%/°C	-0.32
Temperature coefficient of I _{sc}	α _{Isc}	%/°C	0.05

OPERATING CONDITIONS

Max. system voltage	1500V _{DC}
Max. series fuse rating	15A
Limiting reverse current	15A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s
Module Fire performance	Type 1

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material / dimensions / number of busbars)	72 / monocrystalline silicon / 156.75mm x 156.75mm (+/-0.25) / 4 or 5
Frame (material)	anodized aluminum alloy
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	1100mm / 4mm ²
Plug connector (type / protection degree)	MC4 / IP68 or Amphenol H4 / IP68 or Forsol SIKE6 / IP68 or Renhe RH05-8 / IP67

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

UL1703, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, PV Cycle, SA 8000





GENERAL CHARACTERISTICS

Dimensions (L / W / H)	1960mm / 992mm / 40mm
Weight	22kg

PACKAGING SPECIFICATIONS

Number of modules per pallet	26
Number of pallets per 40' container	24
Packaging box dimensions (L / W / H)	1995mm / 1145mm / 1170mm
Box weight	616kg

Unit: mm

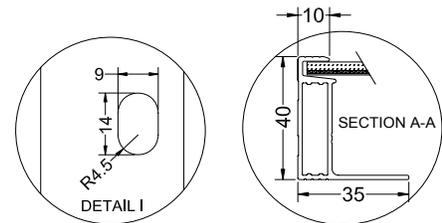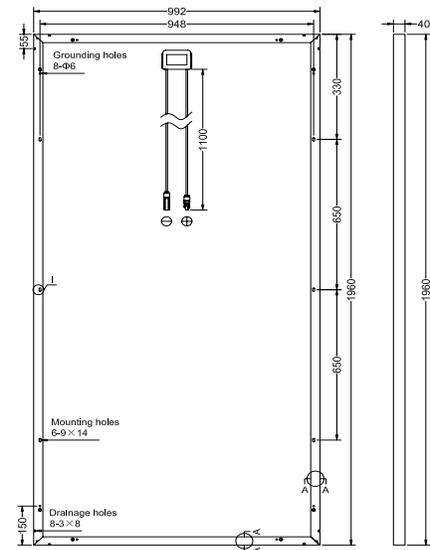

Warning: Read the Installation and User Manual in its entirety before handling, installing, and operating Yingli Solar modules.

Yingli Partners:

Yingli Green Energy Holding Co., Ltd.

service@yingli.com

Tel: +86-312-2188055

YINGLISOLAR.COM

