



## 375W Bifacial Mono PERC Double Glass Module

JAM72D00 355-375/BP Series

### Introduction

These double-glass modules assembled with bifacial PERCIUM cells have the capability of converting lights incident on their rear side into electricity on top of what is being generated by the front side, making them the best-performed and the most cost-effective modules in terms of solar energy generation as well as tolerance for harsh environment and extreme weather conditions.



3%~15% more energy generation



framed design, ease of transportation and installation



Superior low irradiance performance




Excellent temperature dependent performance

### Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.5% Annual Degradation Over 30 years

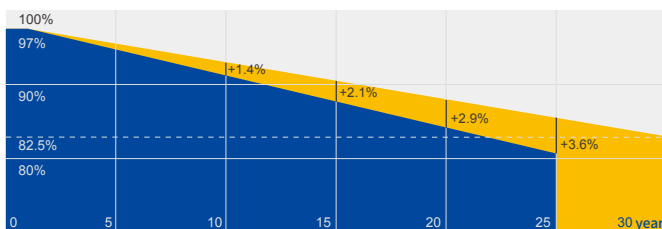


■ Additional Value From 30-Year Warranty ■ JA Standard

### Comprehensive Certificates

- IEC 61215, IEC 61730, IEC TS 62804, IEC 61701, IEC 62716, IEC 60068-2-68, UL 1703
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



**MECHANICAL DIAGRAMS**

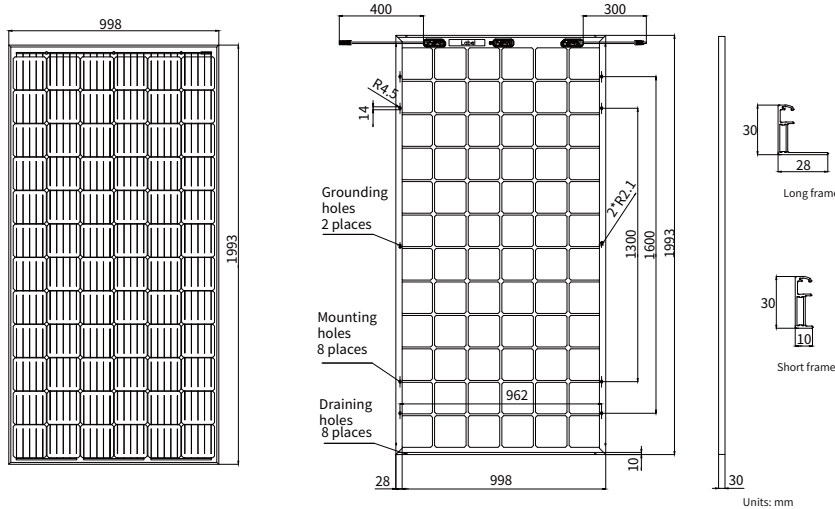

Remark: customized frame color and cable length available upon request

**SPECIFICATIONS**

Cell	Mono
Weight	30.3kg±3%
Dimensions	1993mm×998mm×30mm
Cable Cross Section Size	4mm <sup>2</sup>
No. of cells	72(6x12)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-35
Packaging Configuration	30 Per Pallet

**ELECTRICAL PARAMETERS AT STC**

TYPE	JAM72D00 -355/BP	JAM72D00 -360/BP	JAM72D00 -365/BP	JAM72D00 -370/BP	JAM72D00 -375/BP
Rated Maximum Power(Pmax) [W]	355	360	365	370	375
Open Circuit Voltage(Voc) [V]	47.66	47.84	48.15	48.44	48.68
Maximum Power Voltage(Vmp) [V]	39.76	39.96	40.25	40.53	40.75
Short Circuit Current(Isc) [A]	9.60	9.67	9.74	9.80	9.85
Maximum Power Current(Imp) [A]	8.93	9.01	9.07	9.13	9.21
Module Efficiency [%]	17.8	18.1	18.4	18.6	18.9
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.060%/°C				
Temperature Coefficient of Voc(β <sub>Voc</sub> )	-0.300%/°C				
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.380%/°C				
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.  
The efficiency of the bifacial PERC glass-glass modules at 200W/m<sup>2</sup> to that at 1000W/m<sup>2</sup> is 98%.

\*Bifaciality = Pmax,rear/Pmax,front

**ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN(REFERENCE TO 370W FRONT)**


	5%	10%	15%	20%	25%
Backside Power Gain	5%	10%	15%	20%	25%
Rated Max Power(Pmax) [W]	389	407	426	444	463
Open Circuit Voltage(Voc) [V]	48.4	48.4	48.4	48.5	48.5
Max Power Voltage(Vmp) [V]	40.53	40.53	40.53	40.63	40.63
Short Circuit Current(Isc) [A]	10.29	10.78	11.27	11.76	12.25
Max Power Current(Imp) [A]	9.59	10.04	10.50	10.96	11.41

**OPERATING CONDITIONS**


Maximum System Voltage	1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front Maximum Static Load,Back	5400Pa 2400Pa
NOCT	45±2°C
Bifaciality*	70%±5%

**CHARACTERISTICS**

Current-Voltage Curve JAM72D00-370/BP



Power-Voltage Curve JAM72D00-370/BP



Current-Voltage Curve JAM72D00-370/BP

