




AS-6M30-AT/AS-6M30-AW

DOUBLE GLASS MODULE

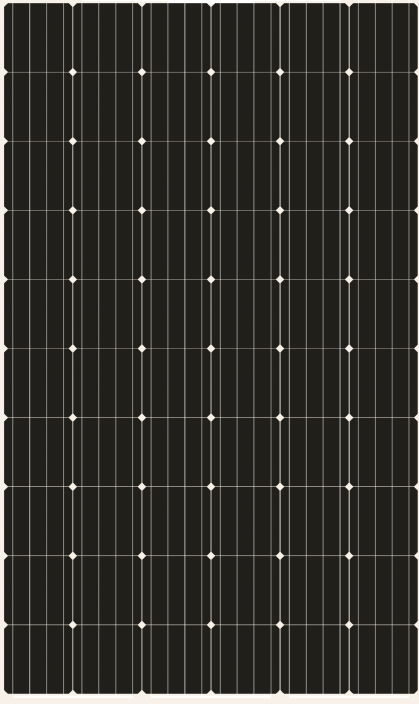

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 17.63% by using high efficient solar cells and advanced manufacturing technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc.).
- Fire Class A certified according to IEC 61730-2/MST 23.
- Potential induced degradation (PID) free.
- Positive power tolerance of 0 ~ +3 %.


CERTIFICATIONS

- IEC61215, IEC61730, CE
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- 10 years limited product warranty.
- Limited linear power warranty: 30 years 80% of the nominal power output.

Passionately
committed to
delivering innovative
energy solution

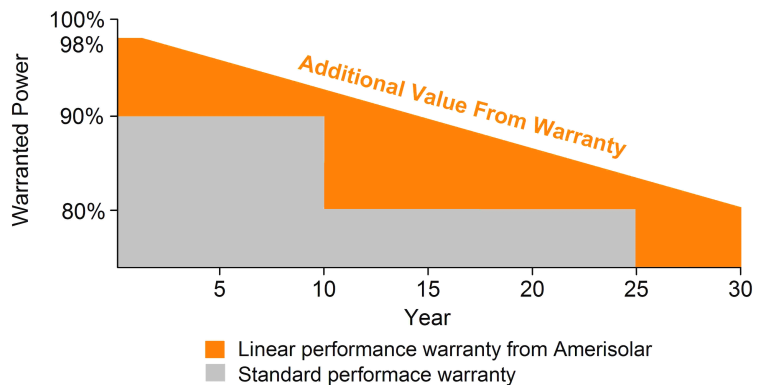

ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	260W	265W	270W	275W	280W	285W	290W
Open Circuit Voltage (V_{oc})	38.0V	38.2V	38.4V	38.6V	38.8V	39.0V	39.2V
Short Circuit Current (I_{sc})	8.98A	9.08A	9.17A	9.25A	9.33A	9.41A	9.49A
Voltage at Nominal Power (V_{mp})	30.8V	31.0V	31.2V	31.4V	31.6V	31.8V	32.0V
Current at Nominal Power (I_{mp})	8.45A	8.55A	8.66A	8.76A	8.87A	8.97A	9.07A
Module Efficiency (%)	15.80	16.11	16.41	16.71	17.02	17.32	17.63
Operating Temperature	-40°C to +85°C						
Maximum System Voltage	1000V DC						
Fire Resistance Rating	Class A (IEC61730)						
Maximum Series Fuse Rating	15A						

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	192W	196W	200W	204W	207W	211W	215W
Open Circuit Voltage (V_{oc})	35.0V	35.2V	35.4V	35.6V	35.8V	36.0V	36.2V
Short Circuit Current (I_{sc})	7.27A	7.35A	7.43A	7.49A	7.56A	7.62A	7.69A
Voltage at Nominal Power (V_{mp})	28.0V	28.2V	28.4V	28.6V	28.8V	29.0V	29.2V
Current at Nominal Power (I_{mp})	6.86A	6.95A	7.05A	7.14A	7.19A	7.28A	7.37A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline 156.75x156.75mm
Number of cells	60 (6x10)
Module dimensions	1662x990x5mm (Without junction box)
Weight	19.6kg
Front Glass	2mm Tempered glass with AR coating
Back Glass	2mm Tempered glass/2mm Ceramic coated glass
Junction box	IP67, 3 diodes
Cable	4mm ²
Connector	MC4 or MC4 compatible

TEMPERATURE CHARACTERISTICS


Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.40%/°C
Temperature Coefficients of V_{oc}	-0.31%/°C
Temperature Coefficients of I_{sc}	0.03%/°C

PACKAGING


Standard packaging	38pcs/pallet
Module quantity per 20' container	456pcs
Module quantity per 40' container	988pcs

ENGINEERING DRAWINGS


Unit: mm

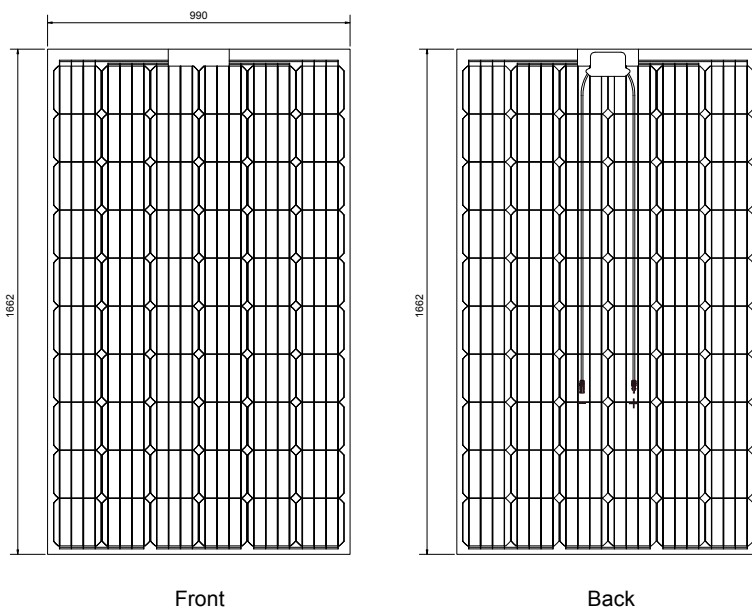

IV CURVES

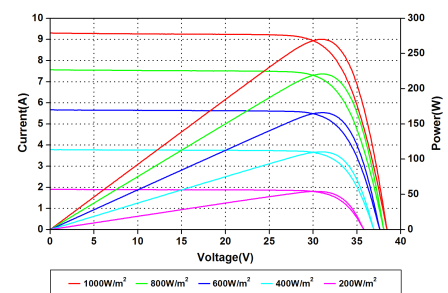

Current-Voltage and Power-Voltage Curves at Different Irradiances

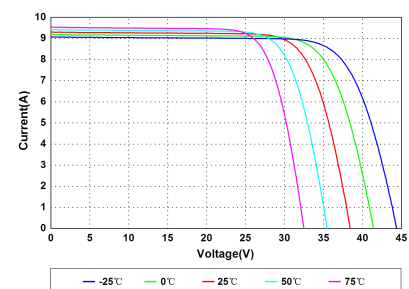

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.