


## MONOCRYSTALLINE SILICON MODULE



0260

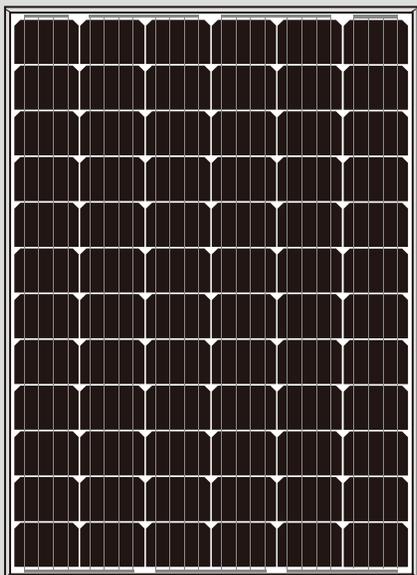

**10** years  
products  
warranty

**25** year  
power output  
warranty

Add: CuiBei Industrial Park, Henglin Town, Wujin District, Changzhou City, Jiangsu Province, China.

Tel: +86-519-85260699

Fax: +86-519-85260299

Email: info@gsunp.com

Web Site: www.gsunp.com

# GSUN power

WWW.GSUNP.COM

## 6M-190 6M-200 6M-210 MONOCRYSTALLINE SILICON MODULE

### Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w

### Warranty

- 10 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

### Comprehensive Certificates


- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215、IEC61730 Certificate
- CE Certificate

Specifications subject to technology and test conditions, GSUN Power reserves the right of final interpretation


# 6M-190

# 6M-200 6M-210

Engineering Drawings (Front Side)

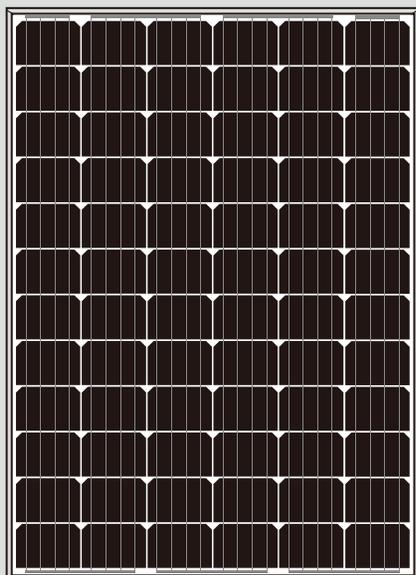

Engineering Drawings (Back Side)

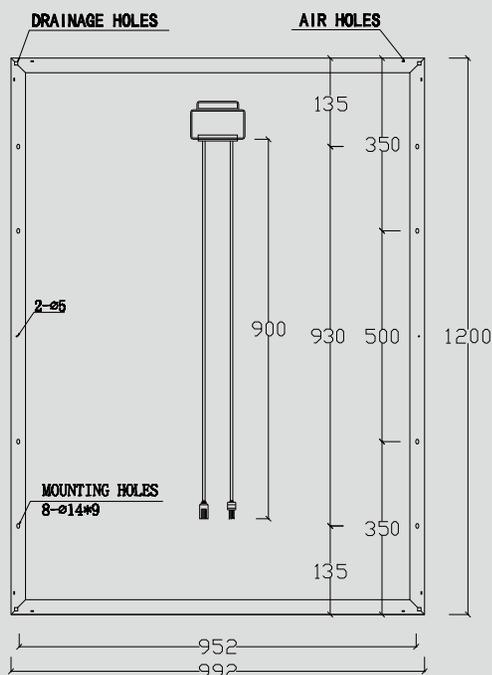

Add: CuiBei Industrial Park, Henglin Town, Wujin District, Changzhou City, Jiangsu Province, China.

Tel: +86-519-85260699  
Fax: +86-519-85260299  
Email: info@gsunp.com  
Web Side: www.gsunp.com

## Raw materials and Mechanical Parameters

	6M-190	6M-200	6M-210
Type of Cells(mm)	mono156 × 93.6		
NO. of Cells and Connections	6 × 12=72		
Dimensions(mm)(L*W*H)	1200 × 992 × 35/40		
Weight(kg)	13.6/13.8		
Glass	3.2mm Tempered Glass		
Encapsulation	EVA		
Backsheet	Multilayer Composite		
Aluminium-Frame	Silvery/Black Anodized aluminium alloy		
Junction-Box	IP65/IP67		
Cable	4mm <sup>2</sup> , 900mm		
Connector	MC4 and MC4 Compatible		
Package Configuration	30/26pcs/pallet		

## Performance Parameters

	6M-190	6M-200	6M-210
Maximum System Voltage	1000V		
Operating Temperature	-45~+80°C		
Maximum Series Fuse	10A		
Maximum Static Load, Front Side (e.x. Snow, Wind)	5400Pa		
Maximum Static Load, Back Side (e.x. Wind)	2400Pa		
Application Grade	Class A		

## Electrical Parameters (Standard Test Condition)

	6M-190	6M-200	6M-210
Rated Maximum Power(Mp)	190W	200W	210W
Power Tolerance	0- +5W		
Cell Efficiency	18.6%	19.4%	20.4%
Open Circuit Voltage(Voc)	47.0V	47.2V	47.5V
Maximum Power Voltage(Vmp)	38.4V	38.6V	38.8V
Short Circuit Current(Isc)	5.24A	5.49A	5.74A
Maximum Power Current(Imp)	4.95A	5.18A	5.41A
Temperature Coefficient of Isc	+0.06%		
Temperature Coefficient of Voc	-0.32%		
Temperature Coefficient of Pmp	-0.45%		
Standard Test Condition	Irradiance: 1000W/M <sup>2</sup> , Cell Temperature: 25°C, Spectrum AM: 1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.