

Poly




Powerguard Insurance Global Coverage

The power output shall not be less than 97.5% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.7% per year thereafter, ending with 80.7% in the 25th year.

■ CSUN ■ Standard warranty

CSUN's NEW linear performance warranty

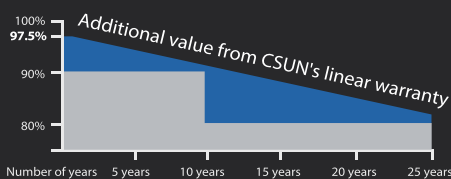

CSUN 340-72P

High efficiency PERC tech for esthetic applications

Module Fire Performance: Type 1 (UL 1703)

Fire Resistance Rating: Class C (IEC 61730)

CSUN340-72P CSUN335-72P

CSUN330-72P CSUN325-72P

17.55%
Module efficiency

340 W
Highest power output

10 years
Material & workmanship warranty

25 years
Linear power output warranty



Industry leading conversion efficiency



Positive tolerance offer



Passed salt mist & ammonia corrosion, blowing sand and hail testing



Certificated to withstand wind (2400 Pa) and snow load (5400 Pa)



Excellent performance under weak light condition



Good temperature coefficient enables better output in hot climates

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficiency solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.
- Founded in 2004, China Sunergy is well known for its advanced solar cell technology, reliable product quality, and excellent customer service.
- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

* Note: All specifications, warranties, certifications about module of „CSUN“ series also apply to that of „SST“.

All information and data are subject to change without notice and are provided without liability.



www.csun-solar.com



All rights reserved by CSUN
Version 2/2014-ENG

Electrical Characteristics at Standard Test Conditions (STC)

Module Type	CSUN 340-72P	CSUN 335-72P	CSUN 330-72P	CSUN 325-72P
Maximum Power - Pmpp (W)	340	335	330	325
Positive Power Tolerance	0~3%	0~3%	0~3%	0~3%
Open Circuit Voltage - Voc (V)	46.6	46.4	46.2	46.0
Short Circuit Current - Isc (A)	9.41	9.33	9.26	9.19
Maximum Power Voltage - Vmpp (V)	38.1	38.0	37.8	37.6
Maximum Power Current - Imp (A)	8.93	8.82	8.74	8.66
Module Efficiency	17.55%	17.29%	17.04%	16.78%

Electrical data relates to standard test conditions (STC) : irradiance 1000W /m² ; AM 1.5 ; cell temperature 25°C measuring uncertainty of power is within ±3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL 1703

Electrical Characteristics at Nominal Operating Cell Temperature (NOCT)

Module Type	CSUN 340-72P	CSUN 335-72P	CSUN 330-72P	CSUN 325-72P
Maximum Power - Pmpp (W)	250	246	243	239
Maximum Power Voltage - Vmpp (V)	35.5	35.3	35.1	34.9
Maximum Power Current - Imp (A)	7.05	6.97	6.93	6.85
Open Circuit Voltage - Voc (V)	43.3	43.1	42.9	42.7
Short Circuit Current - Isc (A)	7.64	7.58	7.53	7.42

Electrical data relates to nominal operating cell temperature (NOCT): irradiance 800W /m²; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C measuring uncertainty of power is within ±3%.

Temperature Characteristics

Voltage Temperature Coefficient	-0.292%/K
Current Temperature Coefficient	+0.045%/K
Power Temperature Coefficient	-0.408%/K

Maximum Ratings

Maximum System Voltage (V)	1000
Series Fuse Rating (A)	20
Reverse Current Overload (A)	27

Mechanical Characteristics

Dimensions	1956 × 992 × 40 mm
Weight	22.3 kg
Frame	Anodized aluminum profile
Front glass	Toughened low iron glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6x12 polycrystalline solar cells (4BB or 5BB 156.75 × 156.75 mm)
Junction Box	Rated current ≥ 13 A, IP ≥ 67 , TUV & UL
Cable	Length 900 mm, 1 × 4 mm²
Connector	Compatible with MC4

Packaging


Container 20’	260 pcs.
Container 40’	624 pcs.
Container 40’HC	672 pcs.

System Design

Temp. Range	-40°C to + 85°C
Hail	Max. diameter of 25mm with impact speed of 23m/s
Max. Capacity	Snow 5400 Pa, wind 2400 Pa
Application Class	A
Safety Class	II

Dimensions

Note: mm (inch)

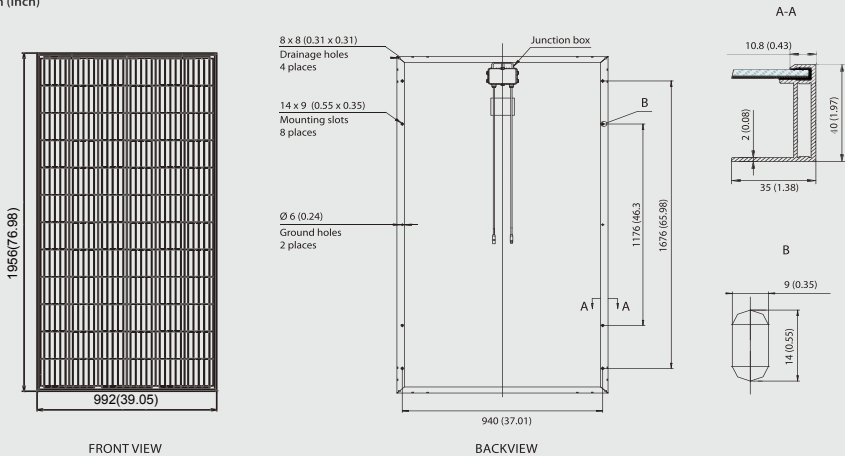

IV-Curves

