



350 - 375 Wp 72 MONOCRYSTALLINE CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



SIMPLY MORE POWER

The AEG solar module AS-M728B is designed to ensure high yields to meet the needs of larger and power-intensive installations.



FULL BLACK, PREMIUM LOOK

The careful selection of components (cells, backsheet and frames) ensures a premium product look and provides extra aesthetical value.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



YOUR ADVANTAGE AT A GLANCE

Premium solar panel with quality components
High efficiency - up to 375 Wp
Product certified IEC 61215, IEC 61730
12 years Product warranty
25 years linear Power warranty

More on: www.aeg-industrialsolar.de



ELECTRICAL CHARACTERISTICS AT STC¹

Nominal Power (P _{max})	[Wp]	350	355	360	365	370	375
Tolerance on Nominal Power P _{max} ²	[Wp]	-0 / +5	-0 / +5	-0 / +5	-0 / +5	-0 / +5	-0 / +5
Maximum Power Voltage (V _{mp})	[V]	38.7	38.8	39.0	39.1	39.3	39.7
Maximum Power Current (I _{mp})	[A]	9.04	9.15	9.25	9.34	9.41	9.45
Open Circuit Voltage (V _{oc})	[V]	47.5	47.7	47.9	48.1	48.3	48.5
Short Circuit Current (I _{sc})	[A]	9.53	9.65	9.75	9.82	9.85	9.89
Module Efficiency (η _m)		18.13%	18.39%	18.65%	18.91%	19.17%	19.43%
Maximum System Voltage	[V]	1000	1000	1000	1000	1000	1000
Series Fuse Maximum Rating	[A]	15	15	15	15	15	15


ELECTRICAL CHARACTERISTICS NOCT³

Product type: AS-M728B-xxx (xxx=350-375)		350	355	360	365	370	375
Maximum Power (P _{max})	[W]	260.9	264.6	268.3	272.1	275.8	279.5
Maximum Power Voltage (V _{mp})	[V]	35.7	35.7	35.9	36.1	36.5	36.8
Maximum Power Current (I _{mp})	[A]	7.31	7.41	7.48	7.54	7.56	7.59
Open Circuit Voltage (V _{oc})	[V]	43.9	44.1	44.3	44.5	44.7	44.8
Short Circuit Current (I _{sc})	[A]	7.72	7.81	7.89	7.95	7.97	8.01

MECHANICAL CHARACTERISTICS

Solar cells	72 (6 x 12) monocrystalline silicon, 156 x 156 mm (6") cells
Front glass	3.2 mm (1.25") high-transparency AR coating glass
Backsheet	black backsheet
Encapsulant	EVA (Ethylene-Vinyl Acetate)
Frame	Anodized aluminum alloy, black
Junction box	IP68 rated, 3 bypass diodes
Cables	UV resistant cable 900 mm (35.43"), sec.4.0 mm ²
Connectors	MC4 compatible connectors
Dimensions	1950 mm x 990 mm x 40 mm (76.77" x 38.97" x 1.57 ")
Weight	23 kg (50.7 lbs)
Maximum load	Wind: 2400 Pa / Snow: 5400 Pa

TECHNICAL DRAWINGS

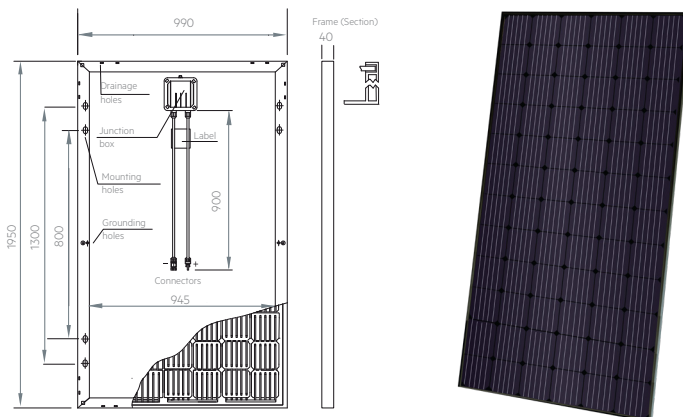

Module dimensions in the technical picture are expressed in mm with tolerance +2 mm (+0.079 ")

1- Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25°C, Power measurement uncertainty within ± 3%.

2- AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power at STC within a power tolerance range between -0 Wp and +5 Wp.

3- Normal Operating Cell Temperature (NOCT): Irradiance 800 W/m², Wind Speed 1m/s, Ambient Temperature 20°C, Power measurement uncertainty within ± 3%.

4- No less than 97% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.7% per year thereafter. Full text of the Warranty Terms available at: www.aeg-industrialsolar.de

© Solar Solutions GmbH Specifications in this datasheet are subject to change without notice. Code: AS-M728B-C6N1-58B 340-375 version 201901V1.EN-EU

AEG is a registered trademark used under license from AB Electroflux (publ).

TEMPERATURE CHARACTERISTICS

NOCT	45°C ± 2°C
P _{max} Temp. Coefficient (γ)	-0.40 %/°C
V _{oc} Temp. Coefficient (β)	-0.29 %/°C
I _{sc} Temp. Coefficient (α)	0.05 %/°C
Operating temperature	-40°C to + 85°C

PACKING CONFIGURATION


Packing configuration	27 pcs / pallet
Loading capacity	648 pcs / 40 ft HC

WARRANTIES

Product warranty	12 years
Performance warranty	25 years, linear ⁴

I-V CURVES / IRRADIANCES

Test temperature: 25 °C

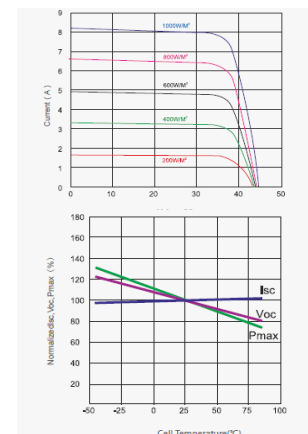

CONTACT US

Solar Solutions GmbH | Schneckenhofstrasse 19 | 60596 Frankfurt am Main | Germany
 Tel: +49 69 400 500 810 | Fax: +49 69 400 500 819 | Mail: info@aeg-industrialsolar.de
www.aeg-industrialsolar.de