




AS-6M-335W

MONOCRYSTALLINE MODULE

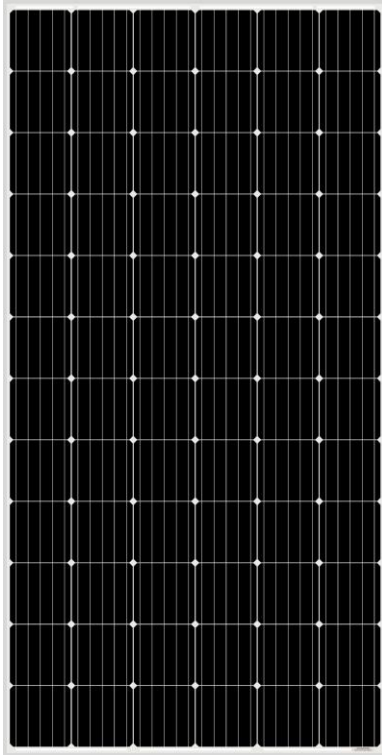

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 18.81% by using high efficient solar cells and advanced manufacturing technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions
- Power tolerance: $\pm 3\%$


CERTIFICATIONS

- IEC61215, IEC61730, CE, CQC, CGC, CEC(Australia), ETL(USA), JET(Japan), J-PEC(Japan), Kemco(South Korea), KS(South Korea), MCS(UK), FSEC(FL-USA), CSI Eligible(CA-USA), Israel Electric(Israel), InMetro(Brazil), TSE(Turkey)
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

Passionately
committed to
delivering innovative
energy solution

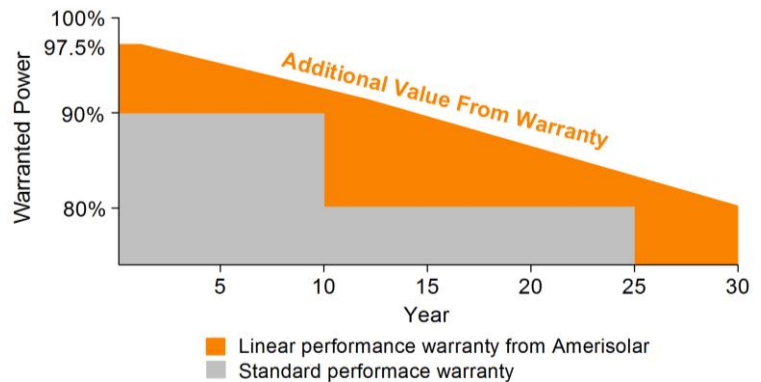

ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	325W	330W	335W	340W	345W	350W	355W	360W	365W
Open Circuit Voltage (V_{oc})	45.9V	46.1V	46.3V	46.5V	46.7V	46.9V	47.1V	47.3V	47.5V
Short Circuit Current (I_{sc})	9.12A	9.21A	9.30A	9.39A	9.48A	9.57A	9.66A	9.75A	9.85A
Voltage at Nominal Power (V_{mp})	37.3V	37.5V	37.7V	37.9V	38.1V	38.3V	38.5V	38.7V	38.9V
Current at Nominal Power (I_{mp})	8.72A	8.80A	8.89A	8.98A	9.06A	9.14A	9.23A	9.31A	9.39A
Module Efficiency (%)	16.75	17.01	17.26	17.52	17.78	18.04	18.30	18.55	18.81
Operating Temperature	-40°C to +85°C								
Maximum System Voltage	1500V DC								
Fire Resistance Rating	Class C								
Maximum Series Fuse Rating	15A								

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	239W	243W	247W	250W	254W	258W	264W	268W	272W
Open Circuit Voltage (V_{oc})	42.4V	42.5V	42.6V	42.7V	42.8V	42.9V	43.9V	44.1V	44.3V
Short Circuit Current (I_{sc})	7.39A	7.46A	7.56A	7.65A	7.75A	7.84A	7.81A	7.87A	7.92A
Voltage at Nominal Power (V_{mp})	34.1V	34.2V	34.3V	34.4V	34.5V	34.6V	35.7V	35.9V	36.1V
Current at Nominal Power (I_{mp})	7.01A	7.11A	7.20A	7.27A	7.37A	7.46A	7.40A	7.47A	7.54A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline 5BB 156.75x156.75mm (6x6inches)
Number of cells	72 (6x12)
Dimensions	1956x992x35mm (77.01x39.06x1.38inches)
Weight	23kg (50.7lbs)
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 1000mm (39.37inches)
Connector	PV-ZH202B(Manufacturer: Zhonghuan Sunter)

TEMPERATURE CHARACTERISTICS


Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.39%/°C
Temperature Coefficients of V_{oc}	-0.29%/°C
Temperature Coefficients of I_{sc}	0.052%/°C

PACKAGING


Standard packaging	30pcs/pallet
Module quantity per 20' container	300pcs
Module quantity per 40' container	660pcs(GP)/715pcs(HQ)

ENGINEERING DRAWINGS

Unit: mm




B




Rear View

Section A-A

IV CURVES

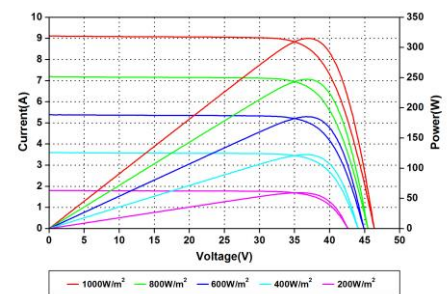

Current-Voltage and Power-Voltage Curves at Different Irradiances

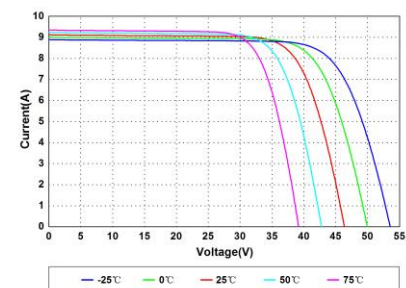

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.