

* V means 1500V module

HT60-156P-C
HT60-156P(V)-C

NEW

Big Zise: Cell 158.75*79.375

285W / 290W
295W / 300W / 305W



- Module Efficiency: 18.1%
- No. of Cells: 120 (6 × 20)
- Weight: 19.0kg
- Dimensions: 1684mm × 1002mm × 35mm

● (Optional) Design of Water Leakage Trough

Polycrystalline
158.75 × 79.375mm



Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
website: www.ht-saae.com



Factory :
Lianyungang ShenZhou New Energy Co., Ltd.
Turkey HT Solar Energy Joint Stock Company



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



MBB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

10Ys
Products
Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

25Ys
Warranty on
power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.

5W

Positive tolerance
0/+5w guaranteed



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID

PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016, IEC61730: 2016 Latest Standard
ISO9001, ISO14001 and OHSAS18001,
meeting the highest international standards
Strict quality control

Warranty partner




IEC 61215
IEC 61730
Regular Production
Surveillance
www.tuv.com

Munich RE



www.munichre.com/PVWarrantyPartner

Engineering Drawing

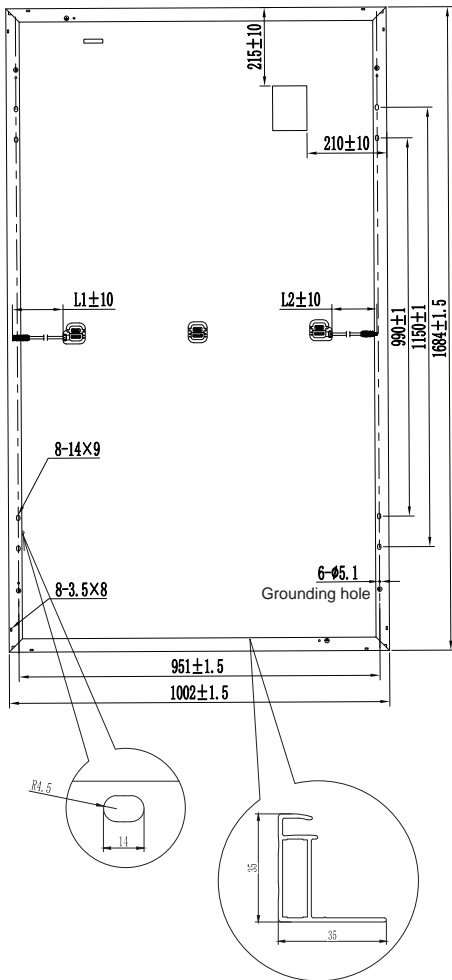

Electrical Characteristics

Module	HT60-156P-C / HT60-156P(V)-C				
Maximum Power at STC(Pmax)	285W	290W	295W	300W	305W
Open-Circuit Voltage(Voc)	38.8V	38.9V	39.0V	39.1V	39.2V
Short-Circuit Current(Isc)	9.68A	9.81A	9.95A	10.10A	10.23A
Optimum Operating Voltage (Vmp)	31.6V	31.7V	31.9V	32.1V	32.3V
Optimum Operating Current(Imp)	9.04A	9.16A	9.26A	9.36A	9.45A
Module Efficiency	16.9%	17.2%	17.5%	17.8%	18.1%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1000V / 1500V DC(IEC)				
Maximum Series Fuse Rating	15A				
Operating Temperature	-40 °C to +85 °C				

*STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NOCT

Module	HT60-156P-C / HT60-156P(V)-C				
Maximum Power	210W	214W	218W	221W	225W
Open Circuit Voltage (Voc)	36.4V	36.5V	36.6V	36.7V	36.8V
Short Circuit Current (Isc)	7.82A	7.92A	8.04A	8.16A	8.26A
Maximum Power Voltage (Vmp)	29.7V	29.8V	30.0V	30.1V	30.3V
Maximum Circuit Current (Imp)	7.07A	7.18A	7.27A	7.34A	7.43A
NOCT	45°C ±2°C				

*NOCT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics


Solar Cells	Polycrystalline 158.75 × 79.375mm
No. of Cells	120 (6 × 20)
Dimensions	1684mm × 1002mm × 35mm (66in × 39in × 1.4in)
Weight	19.0kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67
Cable	4mm ² (IEC) Length: 900mm
Connectors	MC4 / MC4 Compatible
Packaging Configuration	30pcs / box, 780pcs / 40'HQ Container

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.41%/K
Temperature Coefficient of Voc	β (Voc)	-0.32%/K
Temperature Coefficient of Isc	α (Isc)	0.050%/K


I-V Curves

Current-Voltage & Power-Voltage Curve

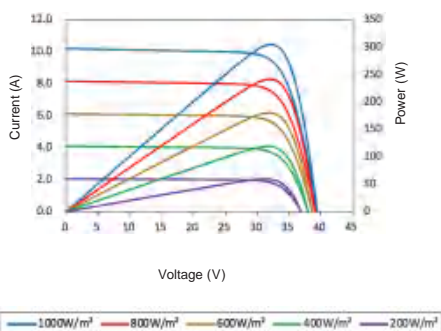

Warranty

10-year product warranty
25-year warranty on power output
Specific information is referred to the product quality guarantee



Information Box