


VSUN

Innovative & Smart

VSUN385-72BMH-DG

High Efficiency Low LID
Bifacial PERC Technology

VSUN385-72BMH-DG VSUN380-72BMH-DG
VSUN375-72BMH-DG VSUN370-72BMH-DG

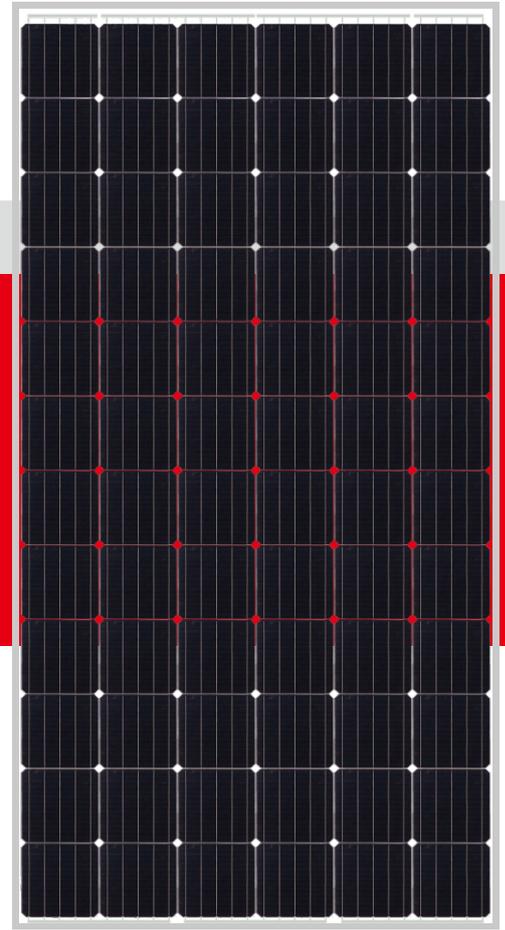

19.15%

Module efficiency

12years

Material & Workmanship warranty

385W

Highest power output

30years

Linear power output warranty



P-type PERC bifacial cell technology



Up to 30% more energy yield due to the back side power generation



Low LCOE



Minimize micro-crack and free of snail trails



Outstanding temperature coefficient




Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

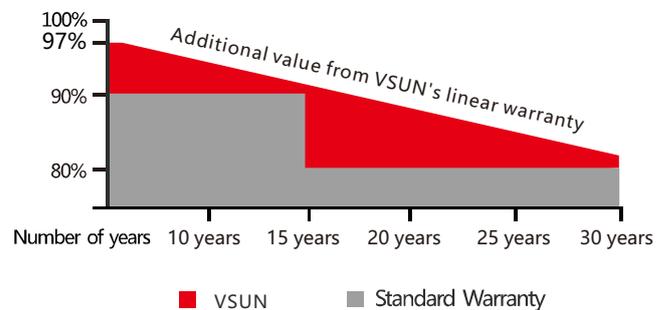

Munich RE 

-12-year product warranty

-30-year linear power output warranty

Invested by Fuji Solar, VSUN is a Japanese solar module solutions provider located in Tokyo that offers Japanese quality solar technologies globally. The group's business started in Japan in 2006, later spreading to North America, Southeast Asia, and EMEA.

Innovative & Smart – VSUN has been committed to providing greener, cleaner, and more intelligent renewable energy solutions. It is focusing on the new energy market and the development of customized and high-efficiency products.

Note:

All information and data are subject to change without notice.
All rights reserved@VSUN

A Sub-company of **FUJISOLAR**



Engineered in Japan
vsun@vietnamsunenergy.com
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN385-72BMH-DG	VSUN380-72BMH-DG	VSUN375-72BMH-DG	VSUN370-72BMH-DG
Maximum Power - Pmax (W)	385	380	375	370
Open Circuit Voltage - Voc (V)	49	48.8	48.5	48.2
Short Circuit Current - Isc (A)	10.03	9.94	9.85	9.79
Maximum Power Voltage - Vmpp (V)	40.4	40.2	39.9	39.7
Maximum Power Current - Imp (A)	9.53	9.46	9.4	9.32
Module Efficiency	19.15%	18.91%	18.66%	18.41%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Tolerance of Pmp: 0~+3%.
Measuring uncertainty of power: ±3%.

Electrical Characteristics with different rear side power gain(reference to 380 front)

Pmax (W)	Voc (V)	Isc (A)	Vmpp (V)	Imp (A)	Pmax gain
399	48.8	10.44	40.2	9.93	5%
418	48.8	10.93	40.2	10.41	10%
456	48.9	11.93	40.1	11.35	20%
475	48.9	12.43	40.1	11.83	25%

Temperature Characteristics

NOCT	45°C(±2°C)	Maximum System Voltage [V]	1000/1500
Voltage Temperature Coefficient	-0.28%/°C	Series Fuse Rating [A]	20
Current Temperature Coefficient	+0.0449%/°C	Bifaciality	70%±5%
Power Temperature Coefficient	-0.367%/°C		

Maximum Ratings

Material Characteristics


Dimensions	2002×1004×35mm (L×W×H)
Weight	24.8kg
Frame	Silver anodized aluminum profile
Front Glass	High transparency,Antireflection coated,Semi-toughened safety glass,2.0mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Glass	Semi-toughened safety glass,2.0mm
Cells	6×12 pieces bifacial monocrystalline solar cells series strings
Junction Box	Rated current≥13A, IP≥67
Cable&Connector	Length 500 mm, 1×4 mm ² , compatible with MC4

Packaging


Dimensions(L×W×H)	2030×1110×1140mm	Temperature Range	-40 °C to + 85 °C
Container 20'	300	Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Container 40'	660	Maximum Surface Load	5,400 Pa
Container 40'HC	715	Application class	class A

System Design

Dimensions

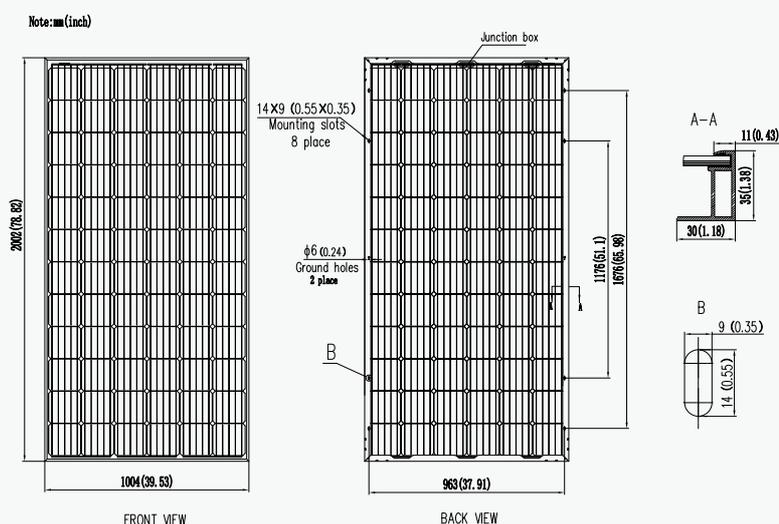

IV-Curves

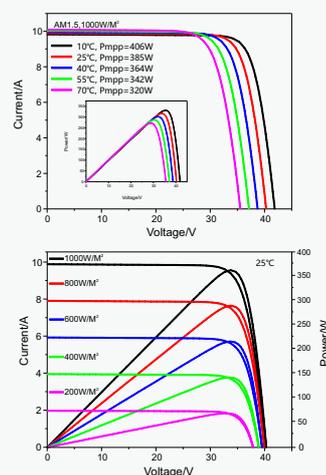

Excellent performance under weak light condition.