




## EUROPEAN QUALITY

### Quality

- / BIPV - Architectural integration
- / Subjected to test electroluminescence
- / High transmissivity glass and high resistance
- / Friendly environment & recyclable materials
- / IP68

### Certificates

- / IEC 61215:2005
- / Anti-PID - System voltage durability
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / VKF-AEAI compliance (Switzerland)
- / Class I (under standard UNI 9177)
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA-Canada)
- / MCS (UK)
- / Sundahus
- / ETN

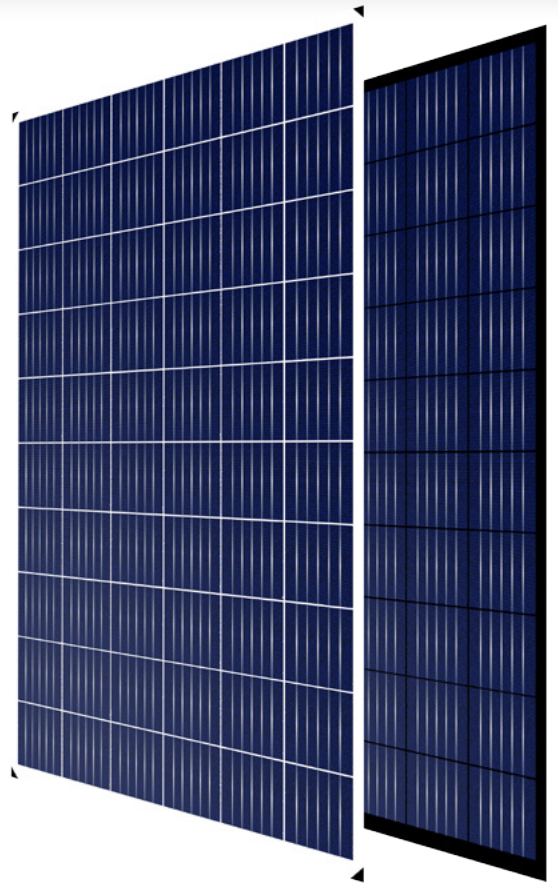

**15** YEARS PRODUCT WARRANTY

**25** YEARS PERFORMANCE WARRANTY

PHOTON Laboratory talks about our modules:

*"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements."*



## PEPV Frameless - Polycrystalline

Standard - All Black / 270 / 275 / 280 / 285 W

25 years performance warranty



12 years product warranty





## Technical features

<b>BIPV - Eurener® Architectural Integration</b> Frameless PV module for building integration
<b>Connection box</b>
Sealed, robust and wide for heat dissipation
IP68 according to IEC 60529
Diodes by-pass built-in (3/6) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1 meter (±0,1m) length and 4mm <sup>2</sup> section
Fire Class I approval (UNI 9177)
<b>Frontal</b>
3,2 mm tempered glass
Textured, extra-clear with low iron content
<b>Solar cells</b>
60 cells polycrystalline silicon / 156x156 mm
<b>Weight, dimensions and packaging</b>
18 Kg   1634 x 986 x 5 mm(+/-1%)   Packaging: 840 pcs-truck

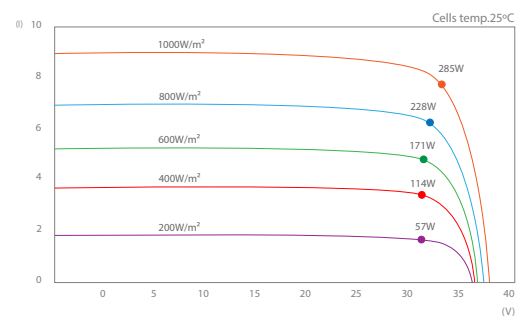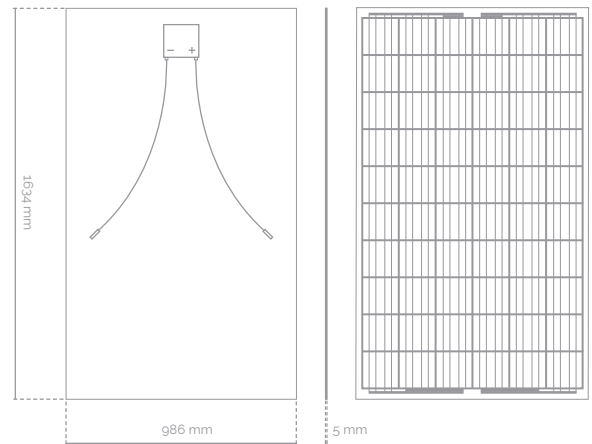

## Electric data

Standard	PEPV 270W - NF	PEPV 275W - NF	PEPV 280W - NF	PEPV 285W - NF
Nominal power, P <sub>mpp</sub>	270W	275W	280W	285W
Tolerance, P <sub>mpp</sub>	0 / +5W	0 / +5W	0 / +5W	±3W
Area of the module	1,62			
Module efficiency	16,67%	16,98%	17,28%	17,59%
I <sub>sc</sub>	9,12 A	9,16 A	9,25 A	9,31 A
U <sub>oc</sub>	38,61 V	38,69 V	39,10 V	39,38 V
I <sub>mp</sub>	8,61 A	8,73 A	8,85 A	8,97 A
U <sub>mp</sub>	31,36 V	31,50 V	31,65 V	31,77 V
Maximum voltage	1000 V			
α I <sub>sc</sub>	0,05% / °C			
β U <sub>oc</sub>	- 0,32% / °C			
γ P <sub>max</sub>	- 0,41% / °C			
Temperature range	- 40°C to +85°C			
NOCT	44°C ± 2°C			

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for: 1000W/m<sup>2</sup>, AM 1.5 and cell's temperature of 25°C. Measurement tolerance +/3%. All the information of this brochure may be amended without notice by Eurener.