



Inspiring green-energy since 2003

PERC Technology

AE DOUBLE-GLASS MONOCRYSTALLINE PV MODULES AE M6-72 Series 370W-385W THE LIGHTWEIGHT TECHNOLOGY

72 CELLS	MICRO-CRACK FREE	FIRE CLASS A	PID	SALT CORROSION RESISTANT	SAND RESISTANT	AMMONIA RESISTANT	HIGHLY STABLE AND TOUGH
--------------------	------------------	--------------	-----	--------------------------	----------------	-------------------	-------------------------

✓ GERMAN QUALITY
AE Solar photovoltaic modules are produced using high quality materials, automated robotic lines, German technology and standards.

\$ HIGH RETURNS
This technology increases the performance ratio, eliminates the potential hazards and material degradation, ensures better safety, long life and high investment returns.


🕒 PERFORMANCE GUARANTEE
AE Solar assures high investment, security and warranty claims by providing linear performance guarantee of 30 years and 12 years of product warranty.

+ PLUS-SORTING
Higher yield due to plus-sorting from 0 up to +5 Wp guarantees the high system efficiency and yield stability.

🛡️ SAFETY
Back sheet is replaced by 2 mm tempered glass, ensuring additional safety, no back sheet degradation and surface for heat loss. Lower temperature offers better and more stable output during high temperature conditions.

📄 CERTIFICATES
Lining with international standards, AE Solar Photovoltaic modules are tested and certified under extreme stress conditions and it can bear harsh environment influences.

OUR PERFORMANCE GUARANTEE

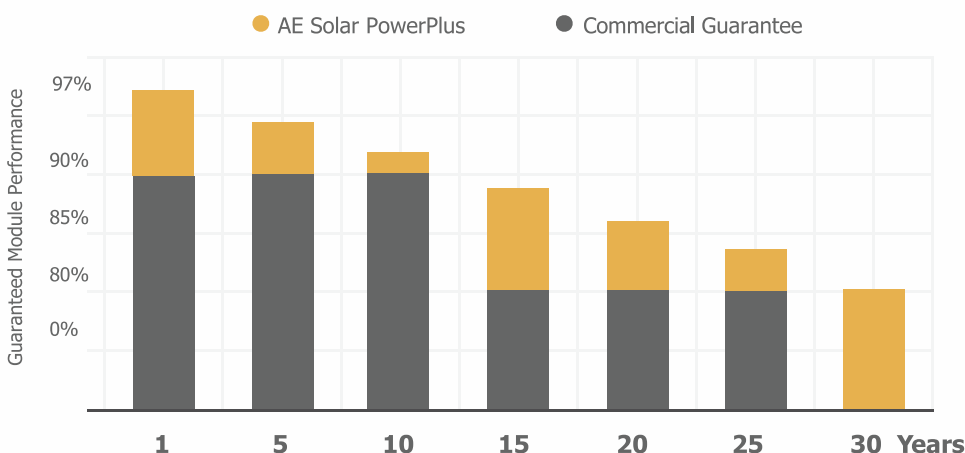

30
years
Performance Guarantee

12
years
Product Warranty



Deutsche Qualität Garantiert

TECHNICAL DATA

AE M6-72 Series 370W-385W

SPECIFICATIONS

		AE370DGM6-72	AE375DGM6-72	AE380DGM6-72	AE385DGM6-72
Nominal Max. Power	Pmax (Wp)	370	375	380	385
Maximum power voltage	Vmp(V)	40.53	40.81	41.08	41.35
Maximum power current	Imp (A)	9.13	9.19	9.25	9.31
Open-circuit voltage	Voc(V)	47.77	48.08	48.38	48.68
Short-circuit current	Isc (A)	9.93	10	10.07	10.14
Module efficiency	(%)	18.79	19.04	19.30	19.55
Power tolerance	Pmax (Wp)	0 / +4.99			
Maximum system voltage DC	(V)	1500			
Operating temperature	(°C)	-40 to +85			
Temp. coefficients of Pmax	(%/°C)	-0.436			
Temp. coefficients of Voc	(%/°C)	-0.325			
Temp. coefficients of Isc	(%/°C)	0.054			
Nom. Operating cell temp.(NOCT)	(°C)	45±2			

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.



MATERIAL CHARACTERISTICS

Cell Type	Mono-crystalline
Cell Dimension	156.75mm × 156.75mm
Dimensions	1985mm x 992mm x 6mm (J-box not included)
Weight	28kg
Front Glass	2.5mm tempered AR glass
Encapsulant	POE
Back Glass	2.5 mm tempered glass / 2.5 mm ceramic coated glass
Junction Box	IP68 (three bypass diodes)
Cable	4.0mm ² , 300mm length or costumised
Connector	QC 4. 10-35
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²

PACKAGING INFORMATION

Packing configuration	66 pcs / pallet
Loading capacity	726 pcs / 40HQ
Size / pallet (mm)	2035 x 1140 x 2264
Weight	1960 kg

DIMENSIONS

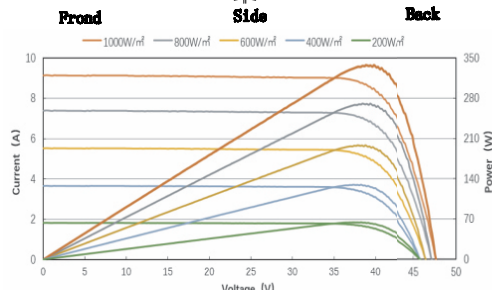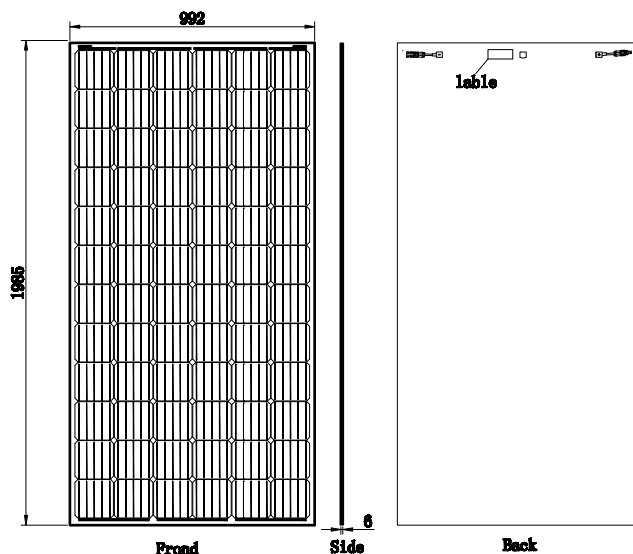

Excellent performance at 200W/m²(AM 1.5, 25 °C): the conversion efficiency could be 96.5% of STC

CERTIFICATES



AES-DSH2019 V.002
All rights reserved. Specifications included in this data sheet are subject to change without notice.

AE Solar GmbH

Messerschmittring 54
86343 Königsbrunn
Germany

Tel.: +49 8231 92 92 52 2
Fax: +49 8231 97 82 68 9
Email: sales@ae-solar.com
Web: www.ae-solar.com