



JX72-156M Series

370W-390W Monocrystalline Module

Features

●Anti-PID

• Excellent temperature coefficient giving higher yields in the long term

- Certified to withstand increased loads of up to 5400Pa
- Outstanding performance in weak-light conditions
- High efficiency, all the innovative manufacturing technology, brings high conversion efficiency

Management System and Product Certificate

Conform to IEC 61215, IEC 61730, CEC Listed and CE ISO 9001: 2015: ISO Quality Management System ISO 14001: 2015: ISO Environmental management system



Linear Performance Warranty



DATA (STC)					
ELECTRICAL DATA(STC)					
Peak Power Watts-Pmax(Wp)	370	380	390		
Power Output Tolerance-P MAX (W)	0∼+5W				
Maximum Power Voltage-V MPP (V)	39.2	39.7	39.9		
Maximum Power Current-I MPP (A)	9.43	9.57	9.77		
Open Circuit Voltage-V OC (V)	48.21	48.8	49.07		
Short Circuit Current-I SC (A)	10.09	10.2	10.45		
Module Efficiency ղ m (%)	18.69	19.16	19.67		


STC:Irradiance 1000 W/m², Cell Temperature 25 $^\circ\!\mathrm{C}$,Air Mass AM1.5.


MECHANICAL DATA	
Solar cells	Monocrystalline 158.75×158.75mm
Cell orientation	72cells (6×12)
Module dimensions	1979×1002×40mm
Weight	23kgs
Glass	3.2mm (0.13 inches), HighTransmission, AR Coated Tempered
	Glass
Frame	Silver or black anodized alunnium alloy
Backsheet	Silver or black
J-Box	IP67 rated (3 or 6 diodes)
Cables	Photovoltaic Technology cable 4.0mm ² (0.006 inches ²),
	900mm (35.46 inches)
Connector	MC4 or MC4 Compatible

TEMPERATURE RATINGS		
Nominal Operating Cell Temperature (NOCT)	44℃(±2℃)	
Temperature Coefficient of PMAX	- 0.39%/°C	
Temperature Coefficient of Voc	- 0.29%/°C	
Temperature Coefficient of Isc	0.05%/℃	

PACKAGING		MAXIMUM RATINGS
Standard packaging	26pcs/pallet	Operational Temperature
Module quantity per 20' container	300 pcs	Maximum System Voltage
Module quantity per 40' container	624 pcs	Max Series Fuse Rating

I-V & P-V Curves SOLAR MODULE 72-370W






-40~+85°℃

15A

1000V DC(IEC)

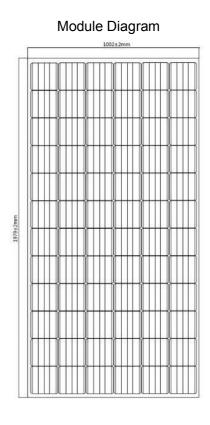

Dimensions in brackets are in inches. Un-bracketed dimensions are in millimeters. Unit: mm[in.]

