

Black Elegance Basic

ASP M6-72 BE Series 340W-360W
Monocrystalline PV-module in Black Design



QUALITY & RELIABILITY
Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING
Best design by the art of German engineering



SAVE INVESTMENT
Product warranty of 12 years
and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE
Up to +5 W plus-tolerance on output



FOR ALL ENVIRONMENTAL CONDITIONS
Resistant against PID, sand, salt and ammonia



STABLE AND STRONG
Capable to bear heavy snow loads up to 5400 Pa
and wind loads up to 2400 Pa




12 YEARS
PRODUCT WARRANTY

OUR PERFORMANCE GUARANTEE



25 YEARS
PERFORMANCE GUARANTEE

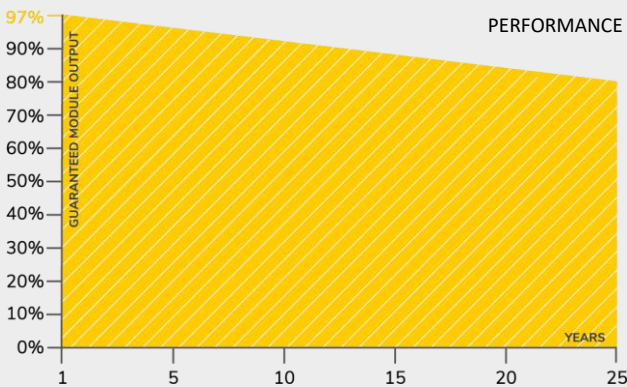


CERTIFICATES



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)

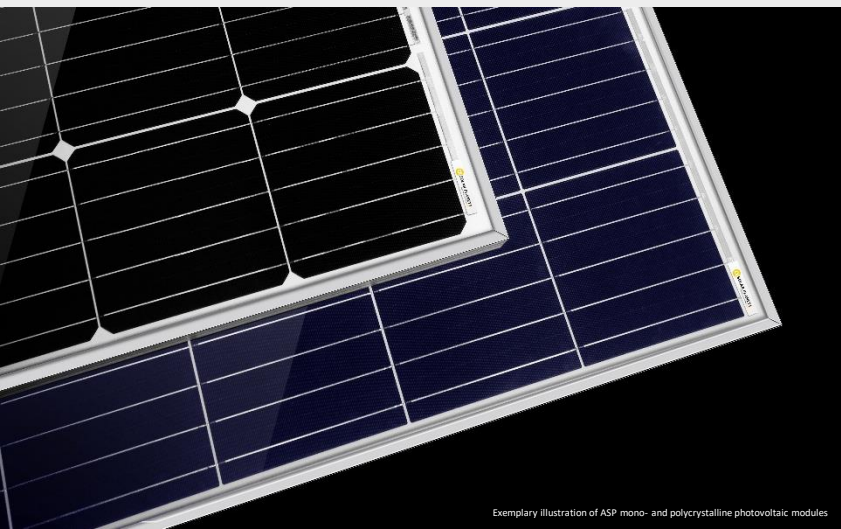

SOLAR PLANET
Enjoy the quality difference

Black Elegance Basic Module

ASP M6-72 BE Series 340W-360W

TECHNICAL DATA

ASP340M6-72

ASP345M6-72

ASP350M6-72

ASP355M6-72

ASP360M6-72

Parameter	Unit	ASP340M6-72	ASP345M6-72	ASP350M6-72	ASP355M6-72	ASP360M6-72
Maximum power	P _{max} (Wp)	340	345	350	355	360
Maximum power voltage	V _{mp} (V)	39.09	39.34	39.46	39.51	39.55
Maximum power current	I _{mp} (A)	8.70	8.77	8.87	8.99	9.10
Open-circuit voltage	V _{oc} (V)	46.94	47.08	47.15	47.30	47.38
Short-circuit current	I _{sc} (A)	9.48	9.51	9.55	9.58	9.62
Module efficiency	%	17.52	17.78	18.03	18.30	18.55
Power tolerance	P _{max} (W)	0 / +5				
Maximum system voltage DC	V	1000				
Operating temperature	°C	-40 to +85				
Temperature coefficients of P _{max}	%/°C	-0.38				
Temperature coefficients of V _{oc}	%/°C	-0.29				
Temperature coefficients of I _{sc}	%/°C	0.05				
Nominal operating cell temp. (NOCT)	°C	45 ± 2				

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	Monocrystalline 156.75 x 156.75 mm
No. of cells	72 (6 x 12)
Dimensions	1956 x 992 x 40 mm
Weight	21 kg
Junction box	IP 67 rated
Output cable	4.0 mm ² , 1200 mm length
Connector type	MC 4 / MC 4 compatible
Hail resistance	Max. Ø 25 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m ²
Mechanical load	5400 Pa / 550 kg / m ²

PACKING INFORMATION

Packing configuration	56 pcs / double pallet
Loading capacity	672 pcs / 40 HQ
Size / pallet	1990 x 1120 x 2410 mm
Weight	1300 kg / pallet

DRAWINGS

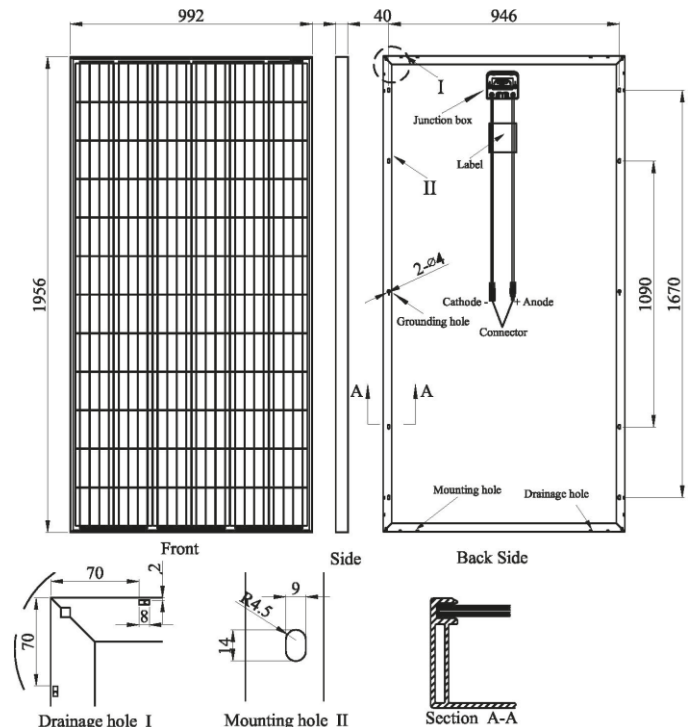

Alpha Solar Planet GmbH
Schwalbenweg 1 g, 86343 Königsbrunn

Tel.: +49 8231 99190 70
Fax: +49 8231 99190 89

E-mail: info@a-s-p.solar
Web: www.a-s-p.solar

