




# GPNE-S120/FNH 166 Half Cell Series

# 350-370W

120-CELL HALF CUT MONOCRYSTALLINE SOLAR MODULE

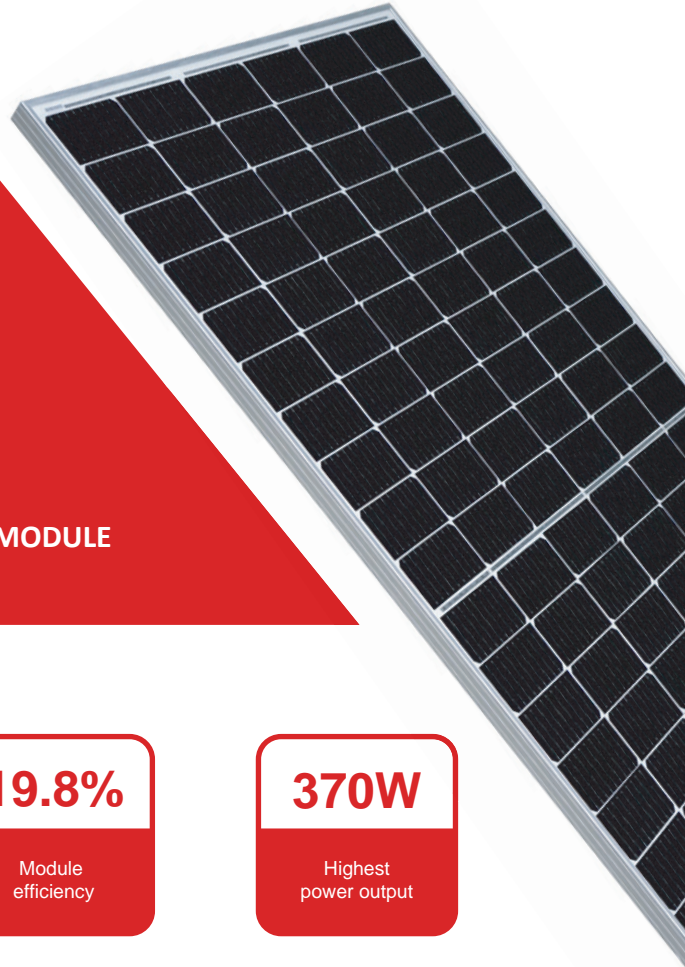

## Product Advantages



**High Power Output**  
Compared to 158.75mm module, the power output can increase 25W-30W



**High Reliability**  
Passed 3\*IEC standard test



**Low Hot-spot Risk**  
1/2 current, reducing the hot spot temperature



**Excellent loading capability**  
2400Pa wind loads, 5400Pa snow loads, 8000Pa extra support



**Low NMOT**  
As low as 43°C, improving the power generation efficiency



**Half Cell, MBB Technology**  
Series-then-parallel cell connection design, more reliable soldering technology


**19.8%**

Module efficiency

**370W**

Highest power output

## Product Guarantee

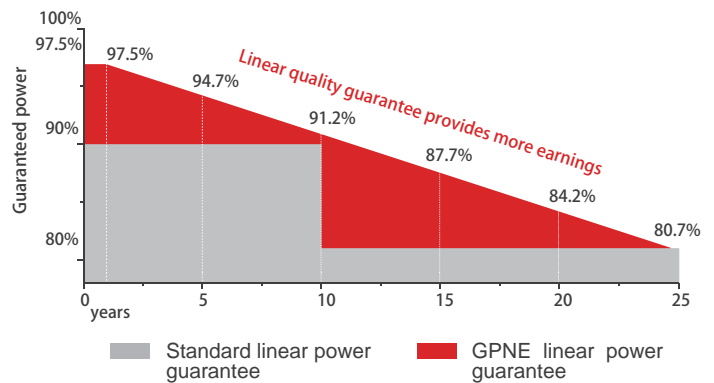

**-2.50%**

First year power degradation

**-0.50%**

Annual degradation

**12**  
Years

Materials and workmanship warranty

**25**  
Years

Linear power warranty

## Product Certification



# GPNE-S120/FNH

## Electrical Characteristics

STC	370	365	360	355	350
Maximum Power at STC (Pmax)	370W	365W	360W	355W	350W
Optimum Operating Voltage (Vmp)	34.3V	34.1V	33.9V	33.7V	33.5V
Optimum Operating Current (Imp)	10.79A	10.71A	10.62A	10.54A	10.46A
Open Circuit Voltage (Voc)	40.9V	40.7V	40.5V	40.3V	40.1V
Short Circuit Current (Isc)	11.49A	11.42A	11.35A	11.28A	11.21A
Module Efficiency	19.8%	19.5%	19.3%	19.0%	18.7%
Operating Module Temperature	-40 °C to +85 °C				
Maximum System Voltage	1500 V DC (IEC)				
Maximum Series Fuse Rating	20 A				
Power Tolerance	0/+5W				

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; Tolerances of Pmax, Voc and Isc are all within +/- 5%.

NMOT	370	365	360	355	350
Maximum Power at NMOT (Pmax)	278.2W	274.3W	270.7W	266.8W	263.3W
Optimum Operating Voltage (Vmp)	32.V	31.8V	31.6V	31.5V	31.3V
Optimum Operating Current (Imp)	8.69A	8.62A	8.56A	8.48A	8.42A
Open Circuit Voltage (Voc)	38.7V	38.5V	38.4V	38.2V	38.V
Short Circuit Current (Isc)	9.17A	9.1A	9.04A	8.96A	8.89A

NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;

## Temperature Characteristics


Nominal Module Operating Temperature(NMOT)	42±2°C
Temperature Coefficient of Pmax	-0.37 %/°C
Temperature Coefficient of Voc	-0.304 %/°C
Temperature Coefficient of Isc	0.050 %/°C

## Mechanical Characteristics

Solar Cell	Monocrystalline silicon 166 mm (9BB)
No. of Cells	120 (6 × 20)
Dimensions	1776 × 1052 × 35mm
Weight	20.0 kgs
Front Glass	3.2 mm
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	4.0 mm <sup>2</sup> , symmetrical lengths (-) 1200mm and (+) 1200 mm

## Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	26	30+1
Pallets per container	6	24
Pieces per container	156	744

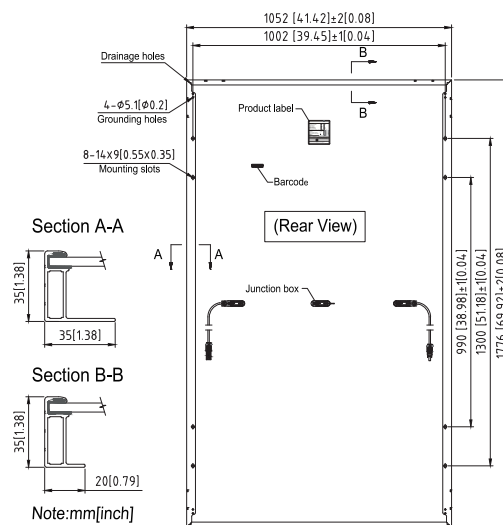

## Current-Voltage & Power-Voltage Curve (370S)

