

20 YEARS  
PRODUCT  
GUARANTEE

25 YEARS  
PERFORM.\*  
GUARANTEE


## **JONSOL**

### **JSM60**

### **310-335W**

### **MONO**

The high quality and reliability of JONSOL are based on many years of production and industry experience, a mature module design and the automatic production process. The result is guaranteed high-performance JONSOL modules.

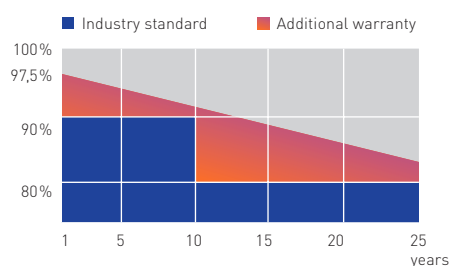

\*Linear performance guarantee

The monocrystalline JONSOL module of the Standard series is an all-rounder for efficiency and performance. Thanks to the higher efficiency of the monocrystalline cells, the JONSOL JSM60 can save any kind of economy Installation to be optimized.

#### **JONSOL quality features JSM60 158B5**



- Module efficiency up to 20.08 percent
- Monocrystalline high-performance solar cells
- Structured special glass
- Fully automatic production lines
- Certification according to IEC
- Comprehensive quality controls
- 100 % electroluminescence test
- IP67 junction box for safety and long-term weather resistance
- Plus sorting up to 3 percent for a higher yield at the same price

# JONSOL

## JSM60

### 310-335W

### MONO

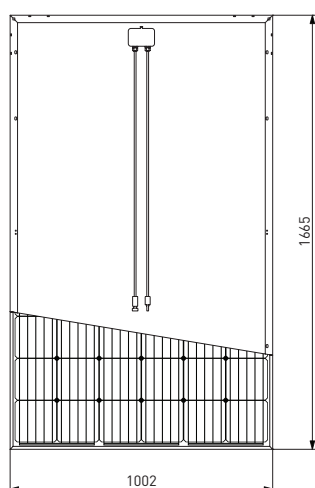

#### Technical data (STC)

Module Type	310 W	315 W	320 W	325 W	330 W	335 W
Nominal power (Pmax)	310 W	315 W	320 W	325 W	330 W	335 W
Nominal voltage (Umpp)	33.0 V	33.2 V	33.4 V	33.6 V	33.8 V	34.0 V
Nominal current (Impp)	9.40 A	9.49 A	9.59 A	9.68 A	9.77 A	9.87 A
Open circuit voltage (Uoc)	40.5 V	40.7 V	40.9 V	41.1 V	41.3 V	41.5 V
Short-circuit current (Isc)	9.98 A	10.04 A	10.15 A	10.20 A	10.31 A	10.36 A
Efficiency	18.58 %	18.88 %	19.18 %	19.48 %	19.78 %	20.08 %
Operation temperature	-40° C - +85° C					
Maximum system voltage	1000 V					
Fire Safety Class	Class A					
Reverse current capability	20 A					
Application classification	A					
Power tolerance (W)	0 - +3 %					

#### Mechanical data

Tkoeff_P	-0.37 %/°C
Tkoeff_U	-0.28 %/°C
Tkoeff_I	0.048 %/°C
NOCT	43 +/-2° C

#### Mechanische Daten

Technology	monocrystalline
Size of cells	6 inch (158.75 x 158.75 mm)
Number of cells	60
Module size (L x W x H)	1665 x 1002 x 35 mm
Weight	18.5 kg
Front/rear glass	3.2 mm, hardened
Frame	anodized aluminum alloy
Junction Box	IP67, 3 diodes
Cable	4 mm <sup>2</sup> , cable length: 100 cm*
Connector	MC4 compatible

#### Packing units

Pieces per pallet	30 pcs
Pallets per 40' HC ctn	28 pcs
Total pcs	840 pcs

\*The cable length is sufficient for vertical installation systems if the distance between the modules is less than 50 mm. If the distance between the modules is more than 50 mm, please contact our technical support for expert evaluation and advice.

Version 6/2020. The specifications and properties contained in this data sheet may vary slightly and are not guaranteed. JONSOL reserves the right to make changes to the information contained herein at any time without notice due to continuous innovation, research and product improvement. Please always keep the current version of the data sheet available. It is a binding part of the contract for all contractual partners when purchasing and selling the products described in the data sheets.