

Monocrystalline 120 cells


MARS



Guaranteed positive output selection 0 ~ +5 Wp by single measuring



3.2 mm anti-reflective glass

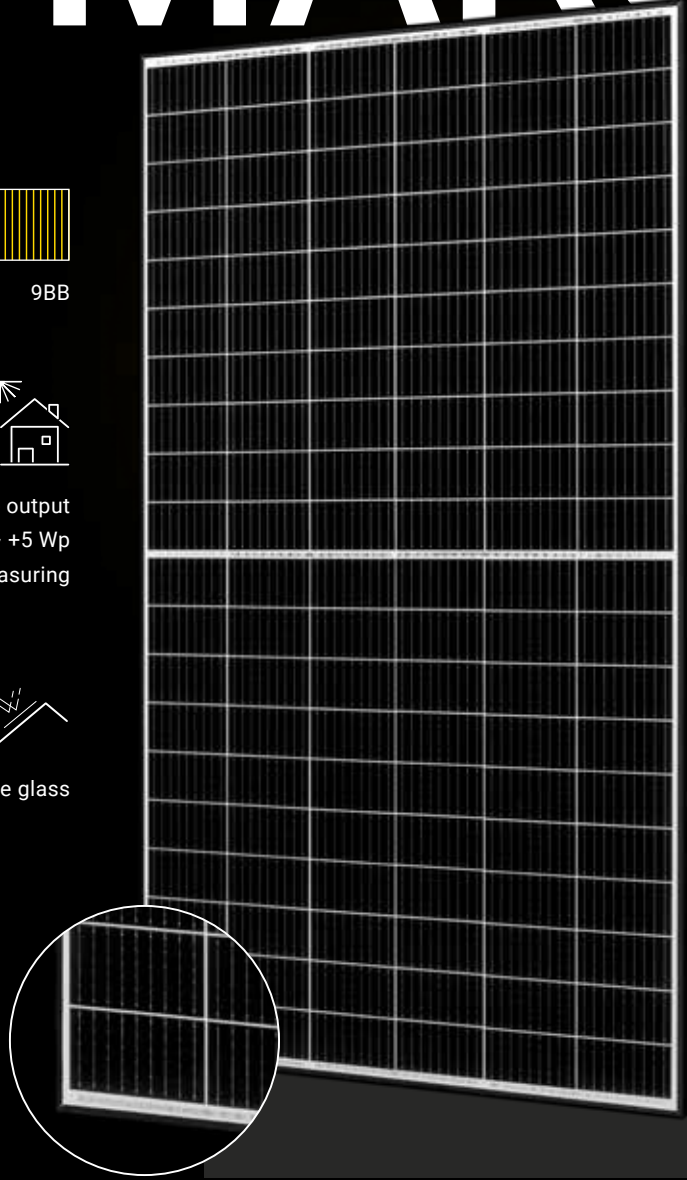

BLACK | WHITE




Maximum stability through aluminium soft grip frame



Maximum 5400 Pa snow load

✓ 15 years manufacturer's warranty
25 years linear performance guarantee

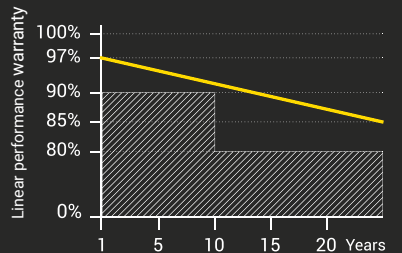

OUTPUT: 320 - 350 WATT

MARS monocrystalline 120 halfcut cell series is one of the top efficiency series. Dimensionally close to the conventional 60 cell modules, halfcut cells are split in two halves to improve the performance and they are arranged in two parallel strings for a better management of shading. Featuring a 35 mm black anodized aluminium frame, MARS series can combine visual attractiveness to conversion efficiency over 20 %.



power for a better world

STC	A-HCM320/120 [5BB]	A-HCM330/120 [5BB]	A-HCM340/120 [5BB]	A-HCM345/120 [9BB]	A-HCM350/120 [9BB]
Maximum Power (Pmax) (W)	320	330	340	345	350
Open Circuit Voltage (Voc) (V)	40.45	41.07	41.67	41.90	42.29
Short Circuit Current (Isc) (A)	10.17	10.32	10.47	10.64	10.69
Voltage at Maximum Power (Vmpp) (V)	33.54	34.06	34.55	34.78	34.90
Current at Maximum Power (Impp) (A)	9.54	9.69	9.84	9.95	10.03
Module Efficiency (%)	18.90	19.48	20.08	20.44	20.74

STC (Standard Testing Condition): Irradiance 1000 W/m², Cell Temperature 25 °C, Spectra at AM 1.5; Test uncertainty tolerance for Pmax, Voc and Isc: ±3 %

Electrical Parameters at NOCT	A-HCM320/120 [5BB]	A-HCM330/120 [5BB]	A-HCM340/120 [5BB]	A-HCM345/120 [9BB]	A-HCM350/120 [9BB]
Maximum Power (Pmax) (W)	237	244	252	257	259
Open Circuit Voltage (Voc) (V)	37.15	37.65	38.18	38.80	38.87
Short Circuit Current (Isc) (A)	8.14	8.25	8.36	8.97	9.00
Voltage at Maximum Power (Vmpp) (V)	33.31	33.82	34.38	34.52	34.50
Current at Maximum Power (Impp) (A)	7.11	7.22	7.32	7.49	7.51

NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², Ambient Temperature 20 °C, Spectra at AM 1.5, Wind at 1 m/s

Temperature Characteristics

Pmax Temperature Coefficients (W / °C)	-0.35 % / °C
Voc Temperature Coefficients (V / °C)	-0.28 % / °C
Isc Temperature Coefficients (A / °C)	+0.05 % / °C
NMOT Nominal Operating Cell Temperature (°C)	45 ±2 °C

Operating Conditions

Operating Module Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	20 A
Selection	0 ~ +5 W
Nominal Front Load	5400 Pa tested 8000 Pa
Nominal Rear Load	2400 Pa
Class of Protection	II


Specifications

Cell Type	Mono G1 158.75 5BB 9BB
Weight	19 kg ±3 %
Dimensions	5 BB: 1700x996x35 mm (±2 mm) 9 BB: 1684x1002x35 mm (±2 mm)
Cable Cross Section Size	4 mm ² , cable approx 110 cm, QC4 compatible
No. of cells	120 (6x20)
Junction Box	IP67, 3 diodes
Frame	Black anodized aluminium
Front glass	3.2 mm high transmission, low iron, tempered glass

Packing Details

Container Type	40'HC
No. of Pallets	26
Pieces per Pallet	30
Total quantity of modules	780

(1700x996x35)

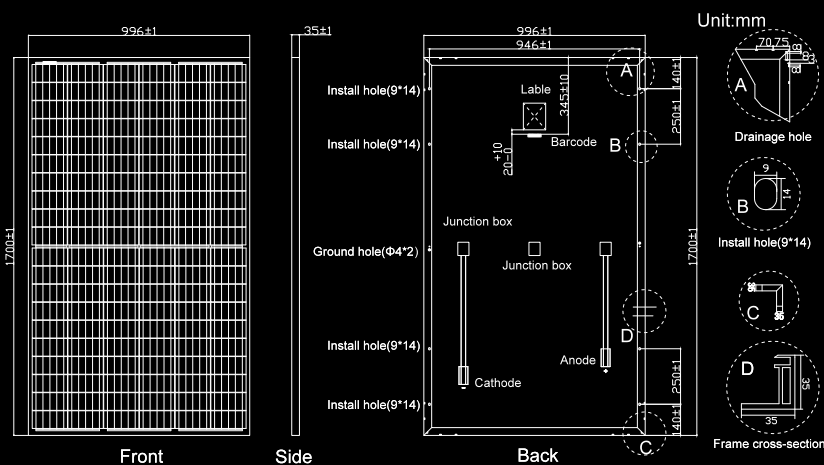

I-V Curve: (A-HCM340)

