




➤ **RMHB60-320~335S1**  
**320~335 Watt**

158mm 120Cells

**PV Bifacial Module**

➤ **25** years product warranty

**30** years performance warranty

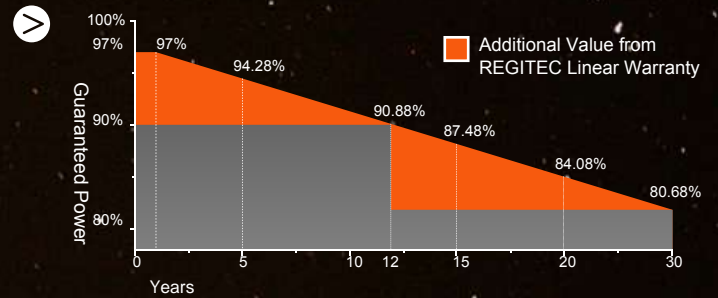

➤ **PRODUCT FEATURE**

- High transmissivity, low-iron tempered glass.
- Using high efficiency mono solar cells
- Excellent performance in low-light environments
- High quality junction box and connector systems
- 100% inspection, to guarantee the reliability of solar systems
- Anti LID
- Anti PID
- Lower temperature coefficient
- Quality RFID Tracking


➤ **MANAGEMENT SYSTEM**

- ISO 9001 :**  
Quality management system
- ISO 14001 :**  
Standard for environmental management system
- OHSAS 18001 :**  
International standard for occupational health and safety assessment system

➤ **PRODUCT CERTIFICATES**





## Dimension Drawing

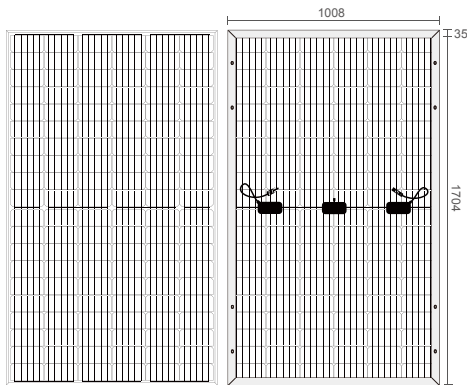

All Dimensions in mm  
The above drawing is a graphical representation of the product.  
For engineering quality drawings please contact REGITEC.

## I-V Graph

Current-Voltage & Power-Voltage Curves (RMHB60-335S1)

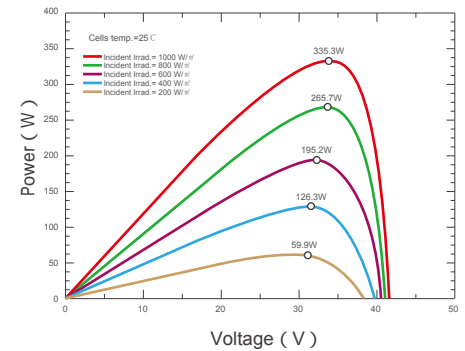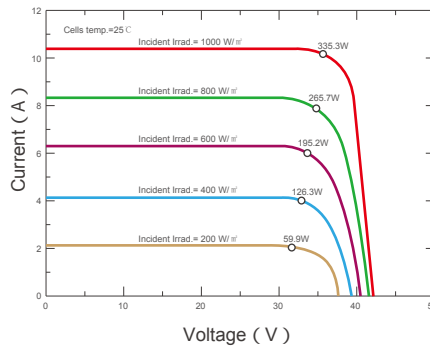

## Electrical Characteristics (STC/NOCT)

Module Type	RMHB60-320S1		RMHB60-325S1		RMHB60-330S1		RMHB60-335S1	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	320	237	325	241	330	244	335	248
Open Circuit Voltage - Voc(V)	40.4	37.6	40.7	37.9	41.0	38.2	41.3	38.5
Short- Circuit Current - Isc(A)	10.01	8.13	10.08	8.18	10.16	8.23	10.24	8.28
Voltage at Pmax - Vmp(V)	33.6	33.0	33.9	33.3	34.2	33.6	34.5	33.9
Current at Pmax - Imp(A)	9.52	7.18	9.59	7.23	9.66	7.28	9.73	7.33
Module Efficiency -ηm(%)	18.96	/	19.26	/	19.56	/	19.85	/
Power Tolerance(W)	(0, +4.99W)							
Maximum System Voltage(V)	1000/1500Vdc (IEC / UL)							
Maximum Series Fuse Rating (A)	20A							

STC : Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

## Mechanical Specifications

External Dimensions	1704X1008X35mm
Weight	19kg
Solar Cells	Mono crystalline 158.75x79.375mm (2x60pcs)
Front Glass	AR Coated 3.2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm <sup>2</sup> , 500mm (+), 500mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

## Packing Configuration

	1704X1008X35mm	
Container	20'GP	40'HQ
Pieces per Pallet	30	33
Pallets per Container	12	26
Pieces per Container	360	858

## Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.270%/°C
Isc Temperature Coefficient	+0.048%/°C
Operating Temperature	-40 ~ +85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C