

SANUPS

PV INVERTER

P61A



SANYODENKI

Highly Efficient PV Inverter

SANUPS P61A

PV Inverter



Grid-connected Type **Transformerless**

Input operating voltage range	Output voltage	Rated output	Ambient temperature
DC 120 V to 500 V	AC 230 V	3 kW, 5 kW	-25 to 60°C



1 Maximum Efficiency of 96%

- P61A has achieved maximum efficiency of 96%.

2 IP65 (International Protection Code of 65)

- It has achieved IP65 level of protection, and is superior in waterproof / dustproof performance. It's safely used outside as well.

3 20 Years of Life Expectancy

- It will last 20 years with part replacement.

External View

Front

Operating and display panel




Bottom 3kW

Model: P61A302

EPO

RS-232

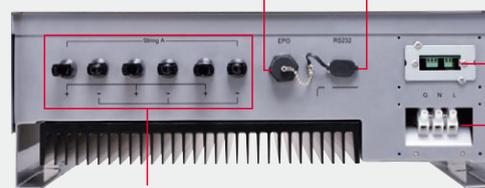

Solar cell input A


External communication*
Grid-connected output*

Bottom 5kW

Model: P61A502

EPO

RS-232

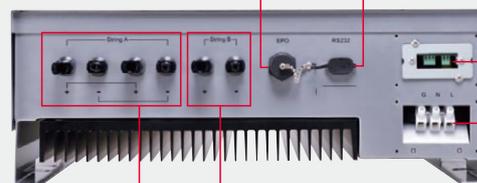

Solar cell input A

Solar cell input B

External communication*
Grid-connected output*

*The waterproof cover is attached.


Specifications

Item	Model*	P61A302	P61A502	Remarks	
Rated output		3 kW	5 kW		
System	Main circuit type	Self commutation voltage type			
	Switching method	High frequency PWM			
	Electrical insulation method	Transformerless			
DC input	Maximum allowable input voltage	DC 500 V			
	Input operating voltage range	DC 120 to 500 V			
	Range of rated output voltage	DC 150 to 450 V			
	Maximum power point tracking range	DC 150 to 450 V			
	MPPT tracker	1	2		
AC output	Output electrical system	Single-phase 2-wire system			
	Rated output voltage	AC 230 V			
	Voltage range	AC 184 to 264.5 V			
	Rated frequency	50 Hz / 60 Hz			
	Rated output current	AC 13 A	AC 21.7 A		
	AC output current distortion factor	Total harmonic current :5% or less, Single harmonic current :3% or less			Rated output current ratio
	Output power factor	0.99 min.			At rated output
Conversion efficiency	MAX Efficiency	96%			
	EU Efficiency	94%			
Grid connected protective function		Utility grid over voltage (OVR), Utility grid under voltage (UVR), Utility grid over frequency (OFR), Utility grid under frequency (UFR)			
Islanding operation detecting functions	Passive-type device	Voltage phase jump detection			
	Active-type device	Reactive power variation method			
External communications		RS-485			
Environment	Installation place	Outdoor			
	Ambient temperature	- 25 to 60°C			When ambient temperatures are above +40°C , the output power is limited As for products complying with the standards, - 25 to 50°C
	Relative humidity	0 to 90%			
	Altitude	2000 m or less			Non-condensing
Protection code		IP65			
Cooling		Free convection			
Connector		AC: Terminal, DC: Connector (MC4)			
Standards	Safety, function	EN50178, IEC62103, DIN V VDE V0126-1-1 AS/NZS 3100, AS/NZS 4777.2, AS/NZS 4777.3 CGC/GF001			
	EMC	EN 61000-6-3, EN61000-6-4, EN55022, EN62040-2, EN61000-6-1, EN61000-6-2			
	CE marking	✓			
	Australian Standards (CEC)	✓ (The C-Tick mark is required separately to use the P61A in Australia.)			

*Model No. and the setting of grid connected protective function is different in each region.


Model No.		Region
3 kW	5 kW	
P61A302RA001	P61A502RA001	China (AC 220V)
P61A302RA002	P61A502RA002	Germany, Spain, France, Belgium (AC 230V)
P61A302RA003	P61A502RA003	Australia (AC 230V)

Dimensions (Unit: mm)

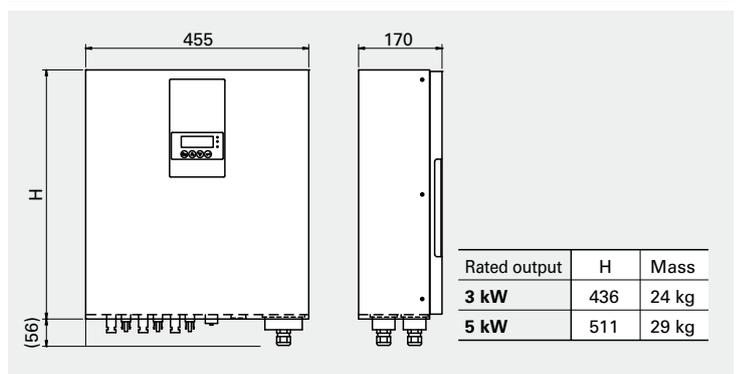


Circuit block diagram

3kW Model: P61A302

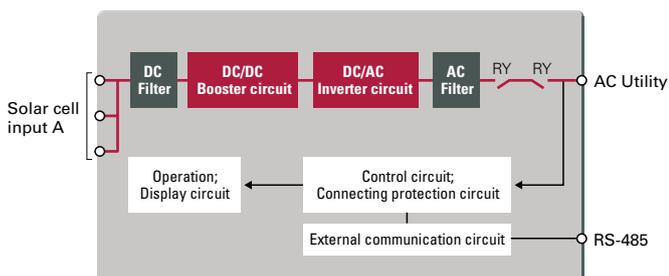

5kW Model: P61A502

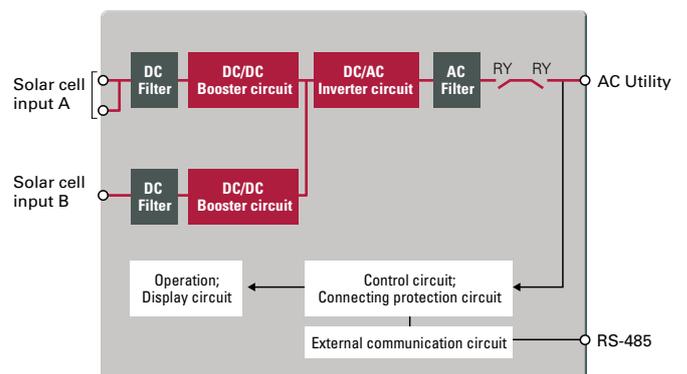

Option

■ Data collection and measuring system

• SANUPS PV Monitor

SANUPS PV Monitor allows you to easily monitor power generation status in remote area via network. Max. 27 connected devices can be measured / monitored.

■ Junction devices


This device plays a role to collect DC outputs from solar cells and outputs to PV inverter.

■ Thermocouple

■ Pyranometer

■ Thermocouple signal converter

■ Pyranometer signal converter

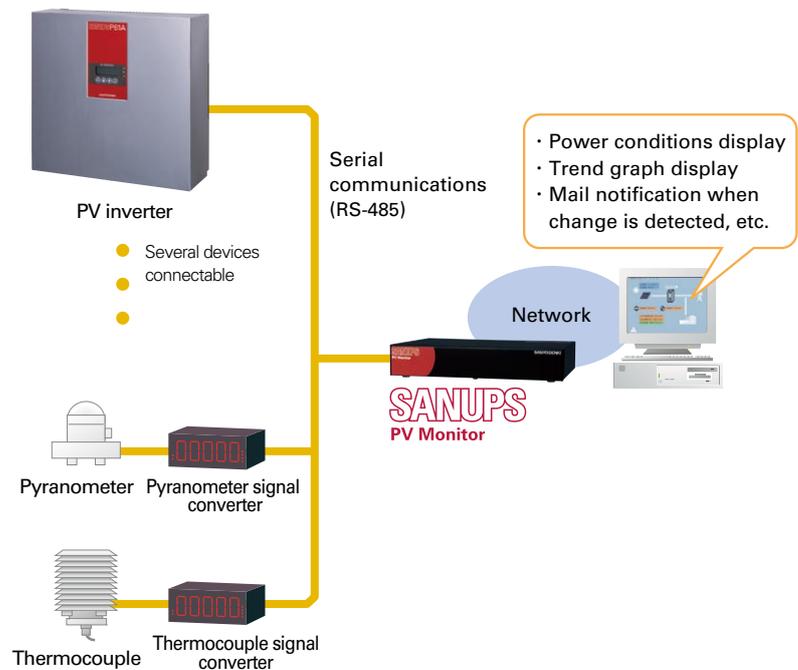

■ ECO PRODUCTS

Sanyo Denki's ECO PRODUCTS are designed with the concept of lessening impact on the environment in the process from product development to waste. The product units and packaging materials are designed for reduced environmental impact. We have established our own assessment criteria on the environmental impacts applicable to all processes, ranging from design to manufacture. Those products that satisfy the criteria are accredited as ECO PRODUCTS.

Notes when investigating use of this product in your applications

- Before starting installation, assembling and use, read the "Operation Manual" carefully and use the product correctly in your applications.
- The product or system on this catalog is for general and industrial use. This product or system is not supposed to be applied to where exceptionally high quality and reliability is required, and its failure or improper operation may possibly result in fatal or serious injury. In this case, please call us for further assistance.

- For the applications that undergo vibration, please consult with our company.
 - Never modify this product or give additional processing to this product.
 - For the installation and maintenance work, please consult with our company or with specialized company.
- ※ For any inquiry or consultation, please contact our sales representative.

SANYO DENKI CO., LTD.

1-15-1, Kita-Otsuka, Toshima-ku, Tokyo 170-8451, Japan

SANYO DENKI AMERICA, INC.

468 Amapola Avenue Torrance, CA 90501 U.S.A.

SANYO DENKI EUROPE SA.

P.A. Paris Nord II, 48 Allée des Erables-VILLEPINTE, BP57286, F-95958 ROISSY CDG Cedex, France

SANYO DENKI GERMANY GmbH

Frankfurter Strasse 92, 65760 Eschborn, Germany

SANYO DENKI KOREA CO., LTD.

9F 5-2, Sunwha-dong Jung-gu Seoul, 100-130, Korea

SANYO DENKI SHANGHAI CO., LTD.

Rm2107-2109, Bldg A, Far East International Plaza, No.319, Xianxia Rd., Shanghai, 200051, China

SANYO DENKI TAIWAN CO., LTD.

Room 1208, 12F, No.96 Chung Shan N, Rd., Sec.2, Taipei 104, Taiwan, R.O.C.

SANYO DENKI (H.K.) CO., LIMITED

Room 2305, 23/F, South Tower, Concordia Plaza, 1 Science Museum Rd., TST East, Kowloon, Hong Kong

SANYO DENKI SINGAPORE PTE. LTD.

10, Hoe Chiang Road, #14-03A/04, Keppel Towers, Singapore 089315

<http://www.sanyodenki.com>

Phone: +81 3 3917 5157

Phone: +1 310 783 5400

Phone: +33 1 48 63 26 61

Phone: +49 6196 76113 0

Phone: +82 2 773 5623

Phone: +86 21 6235 1107

Phone: +886 2 2511 3938

Phone: +852 2312 6250

Phone: +65 6223 1071

The names of companies and/or their products specified in this catalogue are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

*Remarks : Specifications Are Subject To Change Without Notice.

CATALOG No.P0955B003 '12.04