



Micro-Inverter SolarPond 240HF / SolarPond 240HF-US plus SolarWatcher 100

SIMPLE. FLEXIBLE.


- System solution for small PV systems
- Minimizes impact of shading, dust and debris
- Easy installation with ready-made AC-cable

OPEN. INTERACTIVE.



- Wireless inverter communication via ZigBee
- Flexible communication via Ethernet, Wi-Fi and GSM

SECURE. EFFICIENT.

- Real-time local and remote panel level system diagnosis
- Free access to the Samil Power monitoring portal
- 12 year standard guarantee *

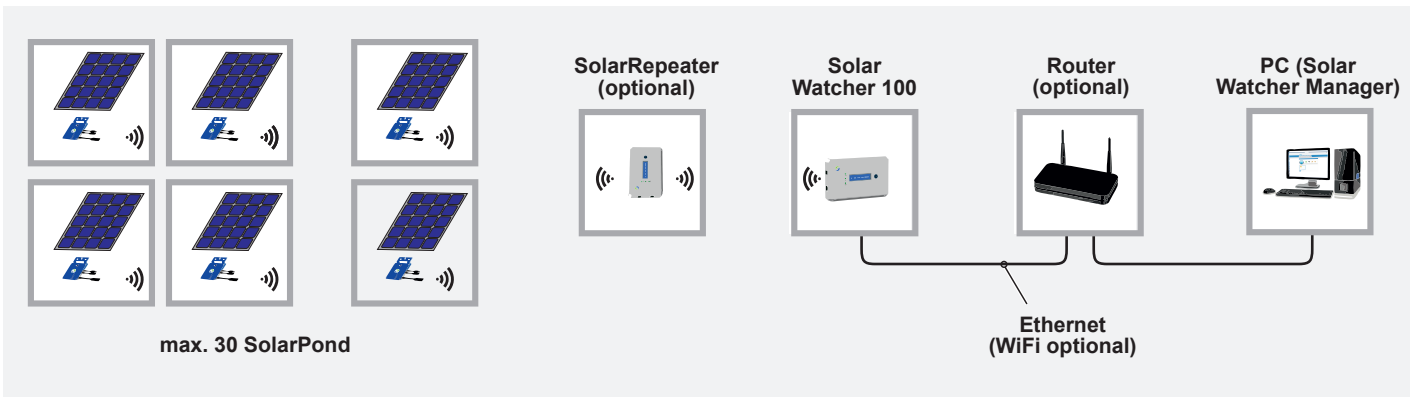

	SolarWatcher 100
Communication	
Interface to SolarPond	ZigBee (IEEE 802.15.4)
Interface: Wi-Fi / Ethernet	○ / ●
Maximum number of SolarPonds polled	30
Power Requirements	
AC-supply	100 V - 240 V / 50 Hz, 60 Hz
Power consumption	2.5 W typical, 5 W maximum
Mechanical Data	
Dimensions (W / H / D)	222 / 105 / 45 mm (8.7 / 4.1 / 1.8 in)
Weight	340 g (0.75 lb)
Operating temperature range	-20 °C ... +50 °C (-4 °F ... +122 °F)
Cooling concept	Convection
Enclosure environmental rating	Indoor (NEMA 1)
Features	
Guarantee	2 years
Certificates and approvals (additional on request)	RTTE 1999/5/CE, EN 60950-1, EN 300 328 V1.7.1, EN 62311:2008, EN 301 489-1 V1.9.2, EN 301 489-17 V2.2.1, UL 60950-1, CSA C22.2 No. 60950-1, FCC Part 15, CLASS B
● Standard features ○ Optional features — Not available	
Technical changes reserved	

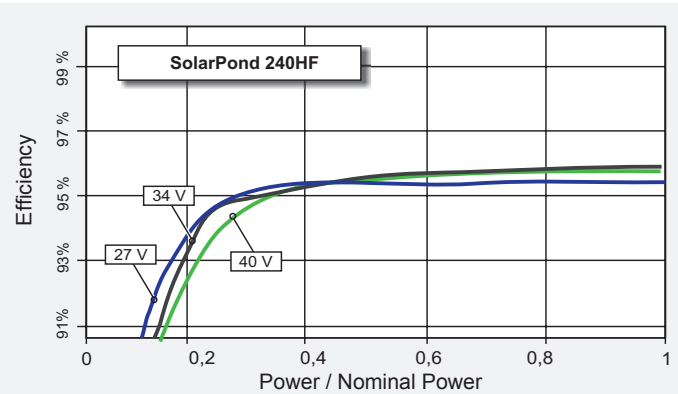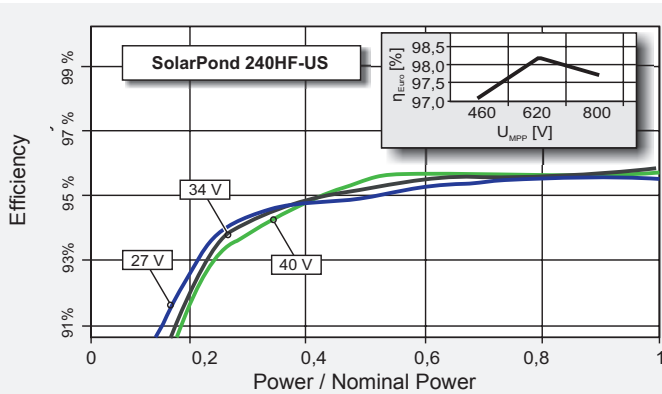

	SolarPond 240HF	SolarPond 240HF-US
Input (DC)		
Max. DC power (@cosφ=1)	250 W	
Max. input voltage	48 V	
MPP-voltage range / nominal voltage	27 V - 40 V / 35 V	
Min. input voltage / start voltage	21 V / 25 V	
Max. input current	9.5 A	
Max. input current per string	9.5 A	
Number of independent MPP-inputs / strings per input	1 / 1	
Output (AC)		
Rated power (@ 230 V / 50 Hz)	240 W	
Max. apparent AC power	240 VA	
Nominal AC voltage / range	230 V / 207 V - 264 V	208 V / 183 V - 229 V 240 V / 211 V - 264 V
AC frequency / range	50 Hz / 47.5 Hz - 52.5 Hz	60 Hz / 59.3 Hz - 60.5 Hz
Rated grid voltage / rated grid frequency	230 V / 50 Hz	240 V / 60 Hz
Max. output current	1.16 A	1.27 A @ 208 V 1.1 A @ 240 V
Power factor at rated power	> 0.95	
Displacement power factor, adjustable	-	
Feed-in phases / connection phases	1 / 1	2 / 2
Efficiency		
Max. efficiency / Weighted efficiency	96 % / 95 % (Euro-eta)	96 % / 95.5 % (CEC-eta)
Protective devices		
Ground fault monitoring / grid monitoring	● / ●	
DC reverse polarity protection / AC short-circuit current capability	● / ●	
Galvanic isolation	●	
All-pole-sensitive residual-current monitoring	●	
Protection class (according to IEC 62103) / Overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)	
General data		
Dimensions (W / H / D)	165 / 170 / 32 mm (6.5 / 6.7 / 1.3 in)	
Weight	2 kg (4.4 lb)	
Operating temperature range	-40 °C ... +85 °C (-40 °F ... +185 °F)	
Noise emission (typical)	< 28 dB	
Self-consumption (night)	50 mW	
Topology	HF transformer	
Cooling concept	Convection	
Degree of protection (IEC 60529 / NEMA ICS 6)	IP67 / NEMA 6	
Maximum humidity (non-condensing)	95 %	
Features		
DC connection / AC connection	Amphenol MC4 / Amphenol 3 wire plug	Amphenol MC4 / Amphenol 4 wire plug
Interface to SolarWatcher 100	ZigBee (IEEE 802.15.4)	
Guarantee	12 years	
Certificates and approvals (additional on request)	CE, AS 4777:2005-2/3, AS 3100:2009 Inc A1, G83/2, EN 61000-6.2/3, CEI 0-21, IEC 62109-1/2, VDE AR-N 4105	UL1741, IEEE 1547, IEEE 1547.1, FCC Part 15. (Class B), CSA C22.2 No. 107.1-01



Samil Power Co., Ltd. (China)

Sales and Service Center, Wuxi
No.52, Huigu Innovation Park, Huishan District, Wuxi,
Jiangsu Province, 214174 P.R.C
T: +86 (0) 510 8359 3132
F: +86 (0) 510 8181 9678
E: info@samilpower.com

Samil Power Co., Ltd. (China)

Office, Shenzhen
7/F, Smart Power Grid Industry Park.
No.1124, Nanshan Avenue.
Nanshan district. Shenzhen, P.R.C
T: +86 (0) 755 2781 2568
F: +86 (0) 755 2781 3866

Samil Power Co., Ltd. (China)

Office, Beijing
Room 706, Building 6, Wanda plaza,
No.93 Jianguo Road,
Chaoyang District, Beijing, 100020 P.R.C
T: +86 (0) 10 5820 4482
F: +86 (0) 10 5820 3961

Samil Power Co., Ltd. (China)

Factory, Suqian
No.6 Xuefengshan Road,
Suyu District, Suqian,
Jiangsu Province, 214174 P.R.C

Samil Power US Ltd. (USA)

3478 Buskirk Avenue, Suite 1000,
Pleasant Hill, CA 94523
T: +1 (925) 930 3924
E: usa@samilpower.com

Support Center Australia

T: 02-85203242 or 1300 134793
E: service-australia@samilpower.com

Support Center Deutschland

T: 089-12140704
E: service-germany@samilpower.com

Centro Assistenza Italia

T: 02-60063040
E: service-italy@samilpower.com

Samil Power Ausco Pty Ltd. (Australia)

Sydney Business and Technology Centre
Unit 5/2 Railway Parade
Lidcombe NSW 2141
T: +61 (0) 2 9643 7788
E: australia@samilpower.com

Samil Power GmbH (Deutschland)

Siemensstrasse 1 + 1a
85716 Unterschleissheim-Lohhof
T: +49 (0) 89 8563341 10
F: +49 (0) 89 8563341 29
E: germany@samilpower.com

Samil Power s.r.l. (Italia)

Sede Legale: Corso di Porta Vittoria 18
20122 Milano
T: +39 02 45 077 584
F: +39 02 40 043 490
E: italy@samilpower.com

Samil Power UK Ltd. (UK)

Unit 19 Horseshoe Park Horseshoe Lane
Pangbourne Reading RG8 7JW
T: +44 (0) 118 984 4481
F: +44 (0) 118 984 4745
E: uk@samilpower.com

Samil Power France SARL (France)

10 Boulevard Marius
Vivier Merle
69003 Lyon
E: france@samilpower.com

Support Center Nederland

T: 020-7018205
E: service-netherlands@samilpower.com

Support Center UK

T: 0118-4029490
E: service-uk@samilpower.com

Support Center USA

T: 001-4154290135
E: service-usa@samilpower.com

