


# Pure Sine Wave Inverter With Charger

OP-SP-800C OP-SP-1000C OP-SP-1500C OP-SP-2000C

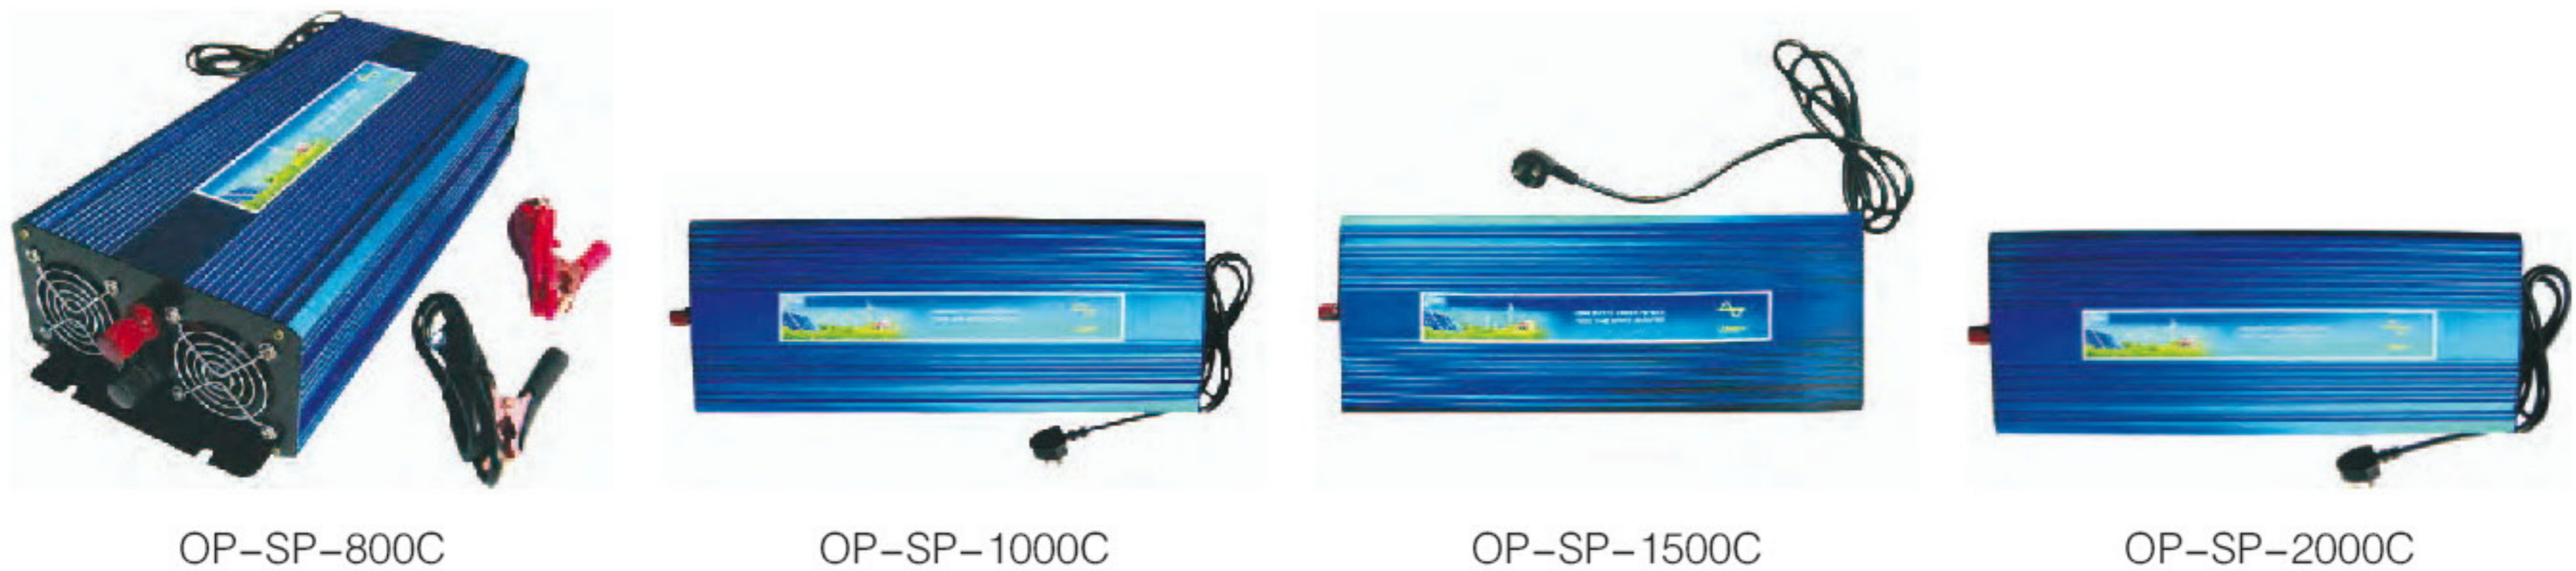

## 技术参数 Technical parameter

型号 Model	OP-SP-800C	OP-SP-1000C	OP-SP-1500C	OP-SP-2000C	
交流输入 AC Input	输出电压 AC voltage	100/110/120VAC or 220/230/240VAC			
	输出频率 Frequency	50Hz or 60Hz			
充电输出 Charge output	充电电流 Charge current	12V/28V			
	充电电压 Charge voltage	7A			
	充电模式 Charge mode	Equalize/Float			
直流输入 DC Input	直流电压 DC voltage	12V/24V			
	直流电压范围 Voltage range	10-15VDC or 21-30VDC			
	空载电流 No load current draw	<0.8	<0.9	<0.8	<0.9
	效率 Efficiency	>85%			
	直流连接 DC connection	电线 Cables With Clips			
输出 Output	输出电压 AC voltage	100/110/120VAC or 220/230/240VAC			
	额定功率 Continuous power	800W	1000W	1500W	2000W
	瞬间功率 Surge power	1600W	2000W	3000W	4000W
保护 Protection	输出波形 Wave form	纯正弦波 Pure sine wave			
	输出频率 Frequency	50Hz/60Hz			
	交流管控 AC regulation	3%			
	低压报警 Low voltage alarm	10DC ± 0.5V or 20.5DC ± 1V			
	低压关断 Low voltage shut down	9.5DC ± 0.5V or 19.5DC ± 1V			
	过载 Overload	输出关闭 Shut off output			
环境 Environment	过压 Over voltage shut down	15.5V/30.5V			
	过热 Over thermal	自动输出关闭 Shut off output automatically			
	工作温度 Working temperature	-10°C to +50°C			
包装 Package	湿度 Working humidity	20% ~ 90% 无冷凝 No condensation RH			
	储存温度 Storage temperature	-30°C to +70°C			
	产品尺寸 Machine size (mm)	409 × 165 × 85	409 × 165 × 85	490 × 165 × 85	605 × 165 × 85
	包装尺寸 Packing size (mm)	503 × 238 × 145	520 × 238 × 145	520 × 238 × 145	637 × 238 × 145
其他 Other	净重 Net weight (kg)	3.71	4.7	5.0	6.50
	毛重 Gross weight (kg)	4.5	5.3	5.63	7.20
	包装方式 Packing mode	纸箱包装 Carton packaging			
	启动 Start	软启动 Soft start			
	冷却方式 Cooling ways	智能冷却风扇 Intelligent cooling fan			

备注：以上数据仅供参考。如有变动，请参阅最新产品使用说明书。

Note: The above parameters are for reference only. If have any changes, subject to the manufacturers of the latest data prevail.