





## SR-300 Grid-tie Micro Inverter System

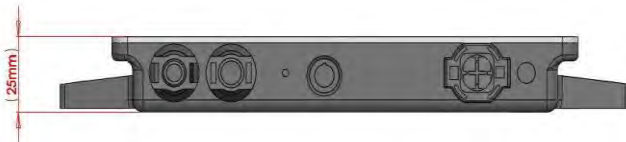

### Product features

- U.S. California Rule 21 Certified
- Thinnest micro inverter in world, 25mm in thickness
- Designed for frame mount (AC module), as well as rail mount solutions
- High continuous output power up to 250Wac, recommended for max 330W solar panels
- High efficiency with 95.5% CEC
- Globally certified for c-ETL-us, SAA, TUV, VDE-AR-N 4105, VDE 0126, G83/2, CEI 021, IEC61727, EN50438
- Integrated grounding for easy installation
- NEMA-6/IP-66/IP-67 enclosure rating
- Integrated monitoring and power line communication with SR-256 gateway

# SR-300

## Grid-tie Micro Inverter System



MODEL		SR-300		
INPUT(DC)	Recommended Max PV Power (Wp)	330		
	Max DC Open Circuit Voltage (Vdc)	60		
	Max DC Input Current (Adc)	12		
	MPPT Tracking Accuracy	>99.5%		
	MPPT Tracking Range (Vdc)	22-55		
	Isc PV (absolute maximum) (Adc)	14		
	Maximum Inverter Backfeed Current to the Array	0		
OUTPUT(AC)	Rated AC Output Power (Wp)	250		
	Nominal Power Grid Voltage (Vac)	240	208	230
	Allowable Power Grid Voltage (Vac)	211-264*	183-229*	configurable*
	Allowable Power Grid Frequency (Hz)	59.3-60.5*		configurable*
	THD	<3% (at rated power)		
	Power Factor (cos phi, fixed)	>0.99 (at rated power)		
	Rated Output Current (Aac)	1.04	1.20	1.09
	Current (inrush) (Peak and Duration)	12A, 15us		
	Nominal Frequency (Hz)	60		50
	Maximum Output Fault Current (Aac)	2.2A peak		
	Maximum Output Overcurrent Protection (Aac)	6.3		
	Maximum Number of Units Per Branch (20A/15A circuit)	15/11	13/10	14/11
	SYSTEM EFFICIENCY	Weighted Averaged Efficiency (CEC)	95.5%	
Night Time Tare Loss (Wp)		0.08	0.06	0.07
PROTECTION FUNCTIONS	Over/Under Voltage Protection	Yes		
	Over/Under Frequency Protection	Yes		
	Anti-Islanding Protection	Yes		
	Over Current Protection	Yes		
	Reverse DC Polarity Protection	Yes		
	Overload Protection	Yes		
	Protection Degree	NEMA-6 /IP-66/IP-67		
	Environment Temperature	-40C — +65C		
	Display	LED LIGHT		
	Communications	Power Line		
	Dimension (W-H-D mm)	180*186*25		
	Weight (Kg)	1.5		
	Environment Category	Indoor and outdoor		
	Wet Location	Suitable		
	Pollution Degree	PD 3		
	Maximum Altitude	2000 M		
	Overvoltage Category	II(PV), III (AC MAINS)		
	Product Safety Compliance	California Rule 21 Certified UL 1741 CSA C22.2 No. 107.1		IEC/EN 62109-1 IEC/EN 62109-2
	Grid Code Compliance* (Refer to the label for the detailed grid code compliance)	IEEE 1547		VDE-AR-N 4105* VDE V 0126-1-1/A1 G83/2, CEI 021 AS 4777.2 & AS 4777.3, EN50438
		<ul style="list-style-type: none"> <li>Grid parameters are configurable through a SR-256 or SR-256P3 gateway</li> <li>Compliance</li> <li>NEC 2014 Section 690.11 DC Arc-Fault Circuit Protection</li> <li>NEC 2014 Section 690.12 Rapid Shutdown of PV Systems on Buildings</li> <li>NEC 2014 Section 705.12 Point of Connection (AC Arc-Fault Protection)</li> </ul>		

\*The AC voltage and frequency range may vary depending on specific country grid

