


PV Grid-Connected Inverter STRING INVERTER SCPV-60KW-M

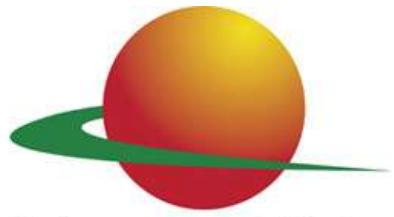

Silicon CPV plc

FLEXIBLE

- Handy and light, easy to handle without lift machinery assistance, lower the cost of installation and maintenance
- Integrated DC combine and surge protection function, lower the system cost
- DC arc detection function (optional), further enhance the safety performance (optional), decrease the loss of generation attenuation



EFFICIENT


- Max efficiency at 98.90%
- Integrated string detection function, find mismatch panel in time and accurately
- PV panel PiD effect eliminate function (optional), decrease the loss of generation attenuation

GRID-FRIENDLY

- Active power continuously adjustable (0~100%)
- Fulfil a variety of reactive power adjustment requirements with power factor 0.8 overexcited ~0.8 underexcited
- Integrated LVRT and HVRT function

QUALIFIED

- TÜV, CE, G59/3, BDEW, CGC and GB-T19964 certification

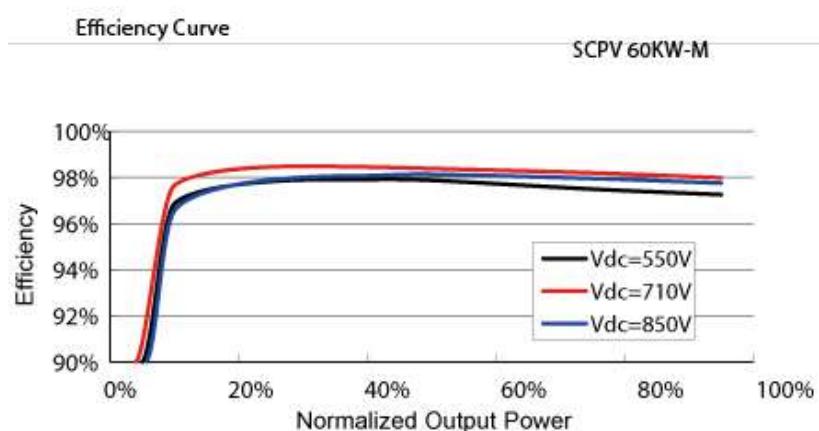

PV Grid-Connected Inverter

STRING INVERTER

SCPV-60KW-M



Specifications (subject to change without notice)		SCPV 60KW-M
Input Side Data		
Max. PV input power	67500W	
Max. PV input voltage	1000V	
Startup voltage	300V	
Nominal input voltage	710V	
MPP voltage range	300~950V	
MPP voltage range for nominal power	500~850V	
No. of MPPTs	4	
Max. number of PV strings per MPPT	3	
Max. PV input current	112A (28A/28A/28A/28A)	
Max. current for input connector	12A	
Output Side Data		
Nominal AC output power	60000W	
Max. AC output power (PF=1)	66000W	
Max. AC output apparent power	66000VA	
Max. AC output current	80A	
Nominal AC voltage	3/N/PE, 277/480Vac	
AC voltage range	422~528Vac	
Nominal grid frequency	50Hz/60Hz	
Grid frequency range	45~55Hz /55~65Hz	
THD	<3% (Nominal power)	
DC current injection	<0.5%In	
Power factor	>0.99@default value at nominal power, (adj. 0.8overexcited / ~0.8underexcited)	
Protection		
Anti-islanding protection	Yes	
LVRT	Yes	
DC reverse connection protection	Yes	
AC short circuit protection	Yes	
Leakage current protection	Yes	
DC switch	Yes	
DC fuse	Yes	
Overvoltage protection	Type II DIN rail surge arrester (40kA)	
System Data		
Max. efficiency	98.90%	
Max. European efficiency	98.60%	
Isolation method	Transformerless	
Ingress protection rating	IP65	
Night power consumption	<1W	
Operating ambient temperature range	-25~60°C (>50°C derating)	
Allowable relative humidity range	0~100%	
Cooling method	Smart forced air cooling	
Max. operating altitude	4000m (>3000m derating)	
Display	Graphic LCD	
Communication	RS485	
DC connection type	MC4	
AC connection type	Screw Clamp terminal	
Certification	VDE0126-1-1, EN62109-1, EN62109-2, G59/3, BDEW, GB/T 19964, GB/T 29319	
Mechanical Data		
Dimensions (W*H*D)	665*906*256 mm	
Mounting method	Wall bracket	
Weight	70kg	

Circuit Diagram

