

# MICROINVERTER

# EVT1200

Connected to FOUR panels.



UPCOMING!



## SAFE

Low DC voltage,  
and invisible.



## QUALITY

Components selected from  
world-class brands.



## OPTIMIZATION

Individual MPPT for  
each module.



## FLEXIBILITY

Adapts to any system size  
and optimizes space.



## PLUG & PLAY

Hand-in-hand design.  
Fewer add-ons.  
Faster installation.



## 25 YEARS

Long 25 years lifetime.  
Up to 15 years warranty.



## SMART

Module-level online smart  
monitoring.



**ENVERTECH**

[www.envertec.com](http://www.envertec.com)

# DATASHEET

**Model** **EVT1200**

### Input Data (DC)

Recommended Input Power Range(STC)	(180W-400W+) *4
Max. DC Input (V)	54V
Isc PV (Absolute Max.) (A)	15A
Operating Range (V)	18V-54V
Max. Input Current (A)	12A*4
MPPT Voltage Range (V)	24-45V

### Output Data (AC)

Normal Voltage (V)	220V/230V
Frequency (Hz)	50Hz/60Hz
Current (Max.continuous) (A)	5.45A/5.22A
Power (Max.continuous) (W)	1200 W
Power Factor/Rated (default)	>0.99
Total Harmonic Distortion	<3%
Maximum Units Per Branch	5 Units (12AWG Cable)

### Efficiency


Peak Inverter Efficiency	95.6%
EURO Weighted Efficiency	95%
MPPT Efficiency	99.9%
Nighttime Power Consumption	< 100mW

### Features

Communication	PLCC (Power Line Carrier Communication)
Lifetime	25 Years

### Others

Ingress Protection (IP)	IP 67
Protective Class	Class I
Temperature (°C)	-40°C to +65°C
Relative Humidity	0% - 98%
Overvoltage Category	OVC III (AC Main), OVC II (PV)
Inverter Isolation	<input type="checkbox"/> Non-isolated <input checked="" type="checkbox"/> High Frequency Isolated
Dimensions (W*H*D)	316.5mm*189mm*46mm

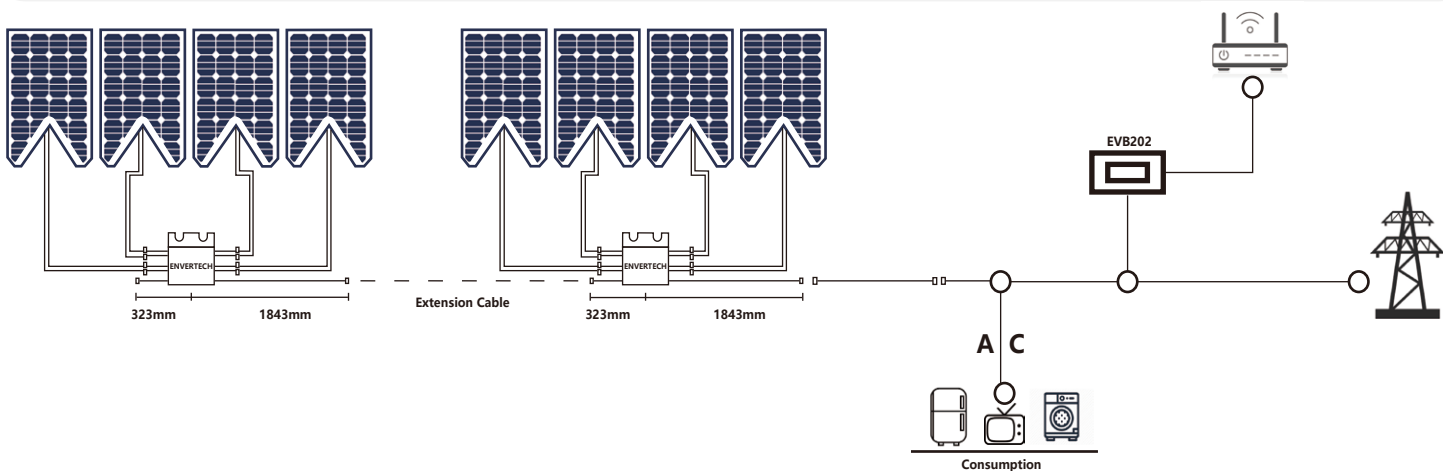

## Monitoring Device EVB202

communicates with Envertech microinverters through PLCC and enables users to manage the systems in a smart digital way.