

## BALLAST WITH 15° ANGLE - Item 23015



<b>DESCRIPTION</b>	Sun Ballast is mainly made of concrete, which ensures low wear over time and high resistance against the harshest weather conditions.		
<b>APPLICATION</b>	Any type of flat or low-pitched roof with up to 10° slope, on the ground, on compacted grounds with inert materials or flooring.		
<b>MODULE TILT ANGLE</b>	15°	<b>NUMBER PER PALLET</b>	10
<b>BALLAST WEIGHT</b>	47 kg	<b>PALLET DIMENSIONS</b>	58 cm x 98 cm h= 62 cm
<b>DISTANCE BETWEEN PANELS</b>	From 80 cm to 100 cm	<b>OVERALL PALLET WEIGHT</b>	470 kg
<b>PV MODULE ORIENTATION</b>	Horizontal, Vertical	<b>PV PANEL DIMENSIONS AS PER DRAWING</b>	165 cm x 99,2 cm

### PANEL INSTALLATION ON FLAT ROOFS




**GENERAL NOTES**

For information, please visit [www.sunballast.it](http://www.sunballast.it)



**15° BALLAST**  
Item 23015

**BALLAST DIMENSIONS AND PANEL HEIGHT FROM THE GROUND - UNIT OF MEASUREMENT cm  
VERTICAL PANEL INSTALLATION**

FRONT VIEW

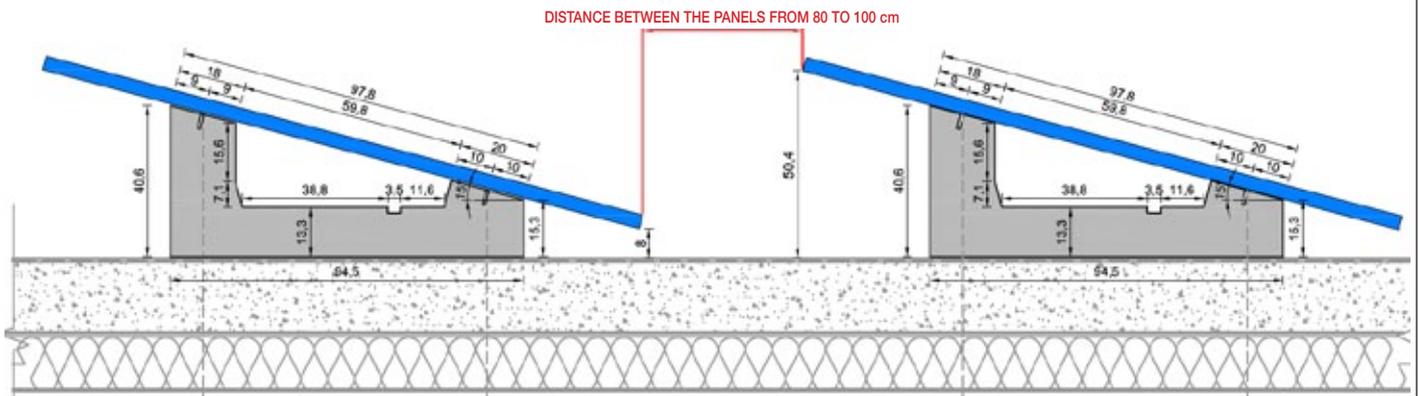


TOP VIEW

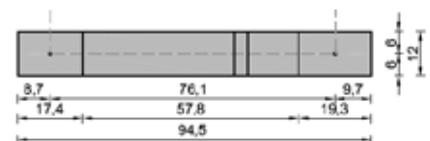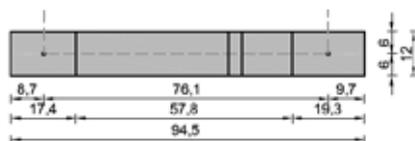

**BALLAST DIMENSIONS AND PANEL HEIGHT FROM THE GROUND - UNIT OF MEASUREMENT cm  
HORIZONTAL PANEL INSTALLATION**

FRONT VIEW

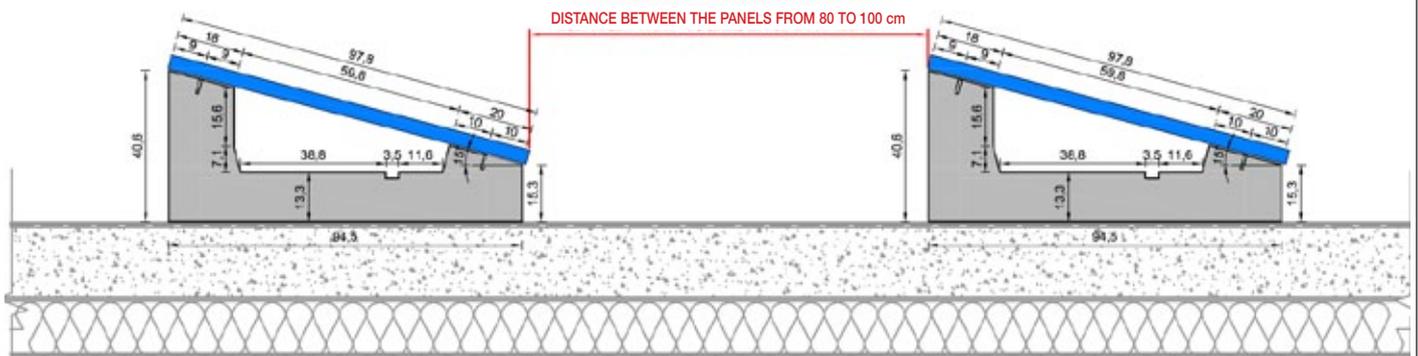

BALLAST VIEW ON FLAT ROOF

