

Standing Seam Roof Mounting




Standing Seam Roof Mounting is a patented and innovative clamping roof mounting with great flexibility both for Commercial and Residential areas. No need of rail makes the installation to be easier and lower cost.



Brief Introduction

- Installation Site: Metal Roof
- Max. Building Height: up to 65ft(22m), customized available;
- Max. Wind Speed: **60** m/s;
- Snow Load: **1.4** KN/m²
- Material: Aluminum 6005-T5 & Stainless Steel 304;
- Warranty: **10** years warranty; **25** years service life.

Components Parts

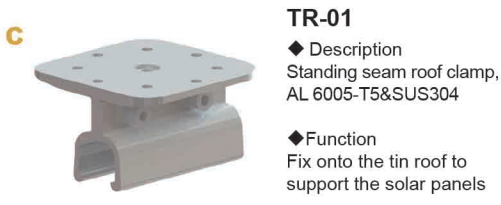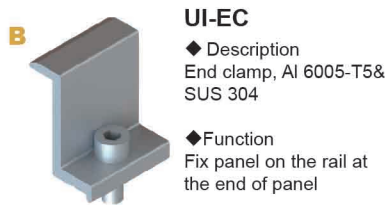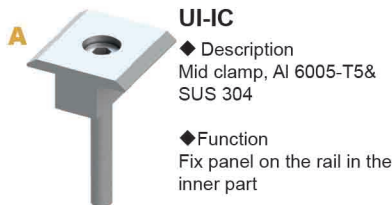


UI-TR Series

- UI-TR series standing seam clamp is used to fix the rail to the raised metal sheet on the roof, which is fastened by the screws without penetrating the roof structure surface.



ITEM NO.	Material	Spec.	WEIGHT	SURFACE
UI-TR-01	Al6005-T5	Tin Roof	345g	Anodized
UI-TR-04	Al6005-T5	Tin Roof	500g	Anodized

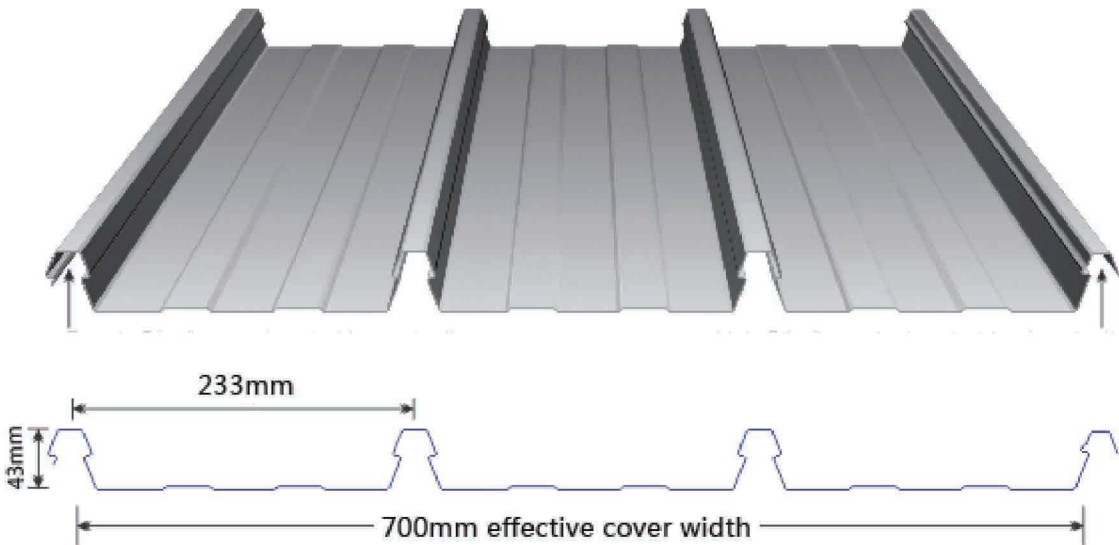

Roof Application for TR-01

Brief Installation Guide

