


CONCRETE ROOF MOUNT - ADJUSTABLE TRIANGLE

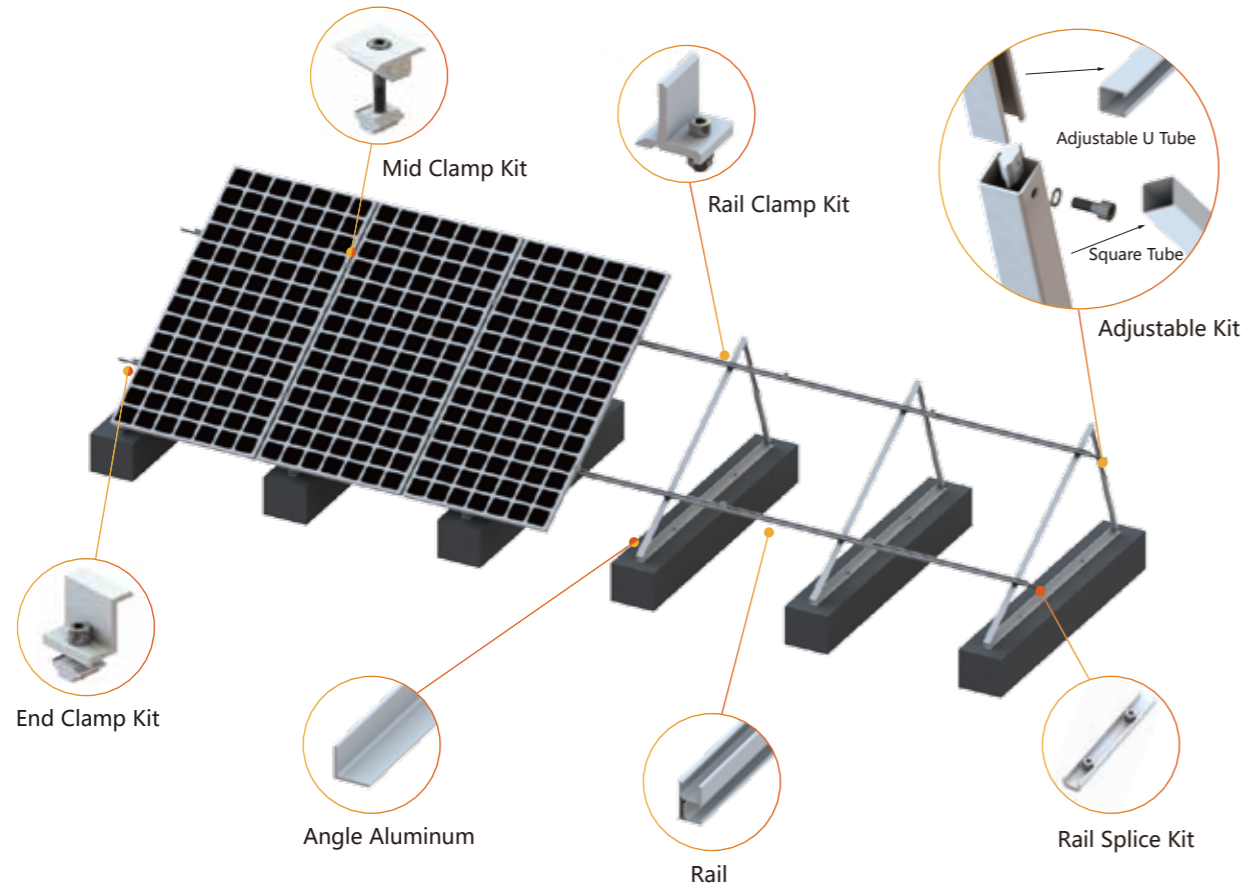


Technical Details

Design Description: This solution is applicable on ground or concrete roof with small inclination. Its structure is light with high strength and good flexibility. And its tilt angle is adjustable at certain range as required.

Installation	Ground/Concrete Roof
Wind Load	up to 60m/s
Snow Load	1.4kn/m ²
Tilt Angle	5~60°
Standards	AS/NZS1170, JIS C8955: 2017, GB50009-2012, DIN 1055, IBC 2006
Material	Anodized Aluminum AL6005-T5, Stainless Steel SUS304
Warranty	10 Years Warranty and 25 Years Service Life

CONCRETE ROOF - FIXED TRIANGLE

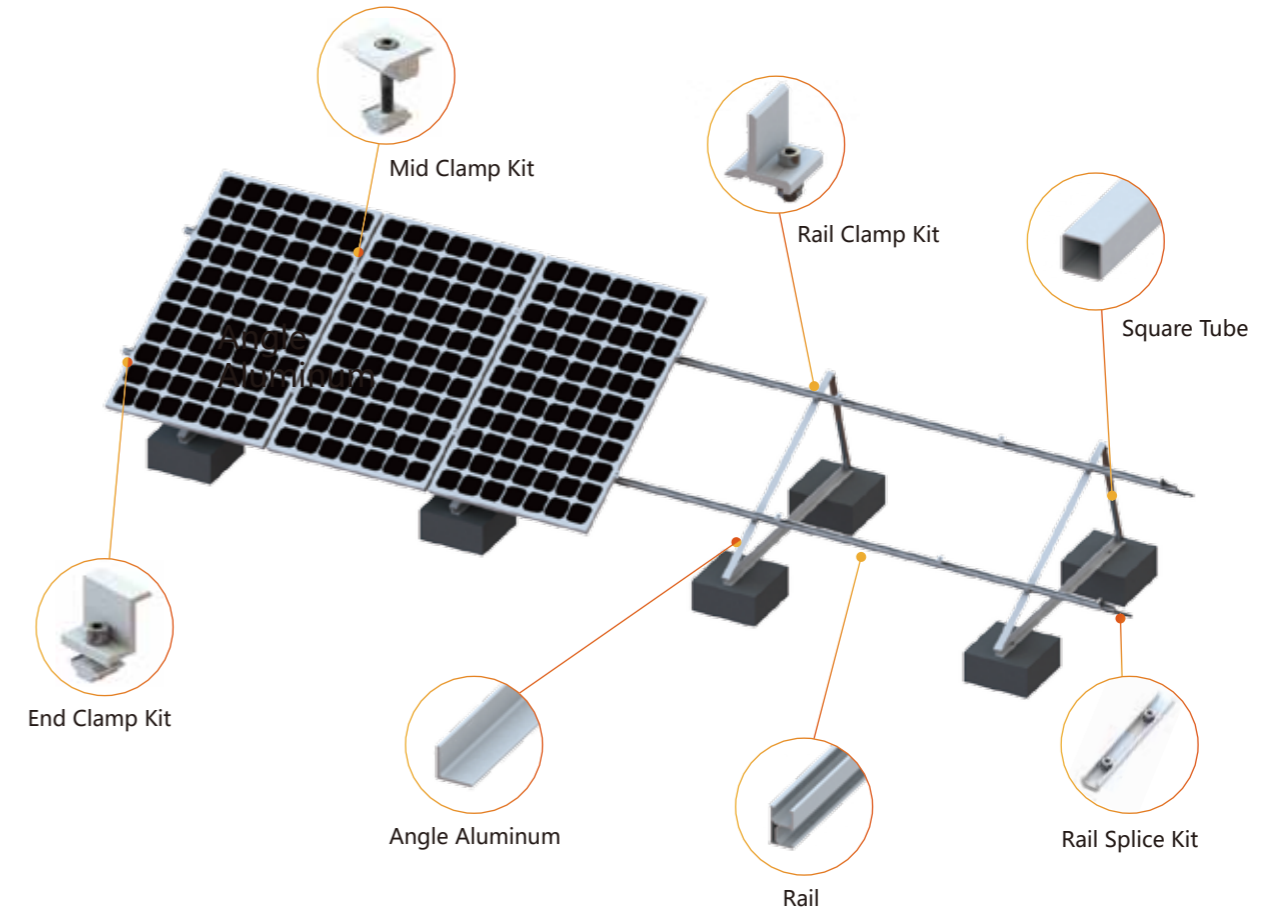

Technical Details

Design Description: This solution is applicable on ground or concrete roof with small inclination. Its structure is light with high strength and good flexibility.

Installation	Ground/Concrete Roof
Wind Load	up to 60m/s
Snow Load	1.4kn/m ²
Tilt Angle	0~60°
Standards	AS/NZS1170, GB50009-2012, DIN 1055, IBC 2006
Material	Anodized Aluminum AL6005-T5, Stainless Steel SUS304
Warranty	10 Years Warranty and 25 Years Service Life