




● Specifications

Nominal Voltage		12V
Rated Capacity		100Ah
Dimensions	Total Height	11.22 inches (285mm)
	Height	11.22 inches (285mm)
	Length	15.51 inches (394mm)
	Width	4.29 inches (109mm)
Approximate Weight		71.65 lbs. (32.5kg)

● Characteristic

Capacity 77°F(25°C)	20h rate	105Ah
	10h rate	100Ah
	5h rate	90Ah
	1h rate	60Ah
	15 min rate	42Ah
Internal Resistance	Full Charged Battery 77°F(25°C)	Approx. 5m Ω
Capacity Affected by Temperature (20h rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 68°F(20°C) (Capacity after:)	3 month storage	90%
	6 month storage	80%
	12 month storage	60%
Max. Discharge Current 77°F(25°C)	800A(5s)	
Terminal	T13	
Charge (Constant Voltage, 25°C)	Cycle	14.4~14.7V(-30mv/°C) max. current: 30 A
	Float	13.6~13.8V(-20mv/°C)

DISCHARGE CHARACTERISTICS AT 25° C(77° F)

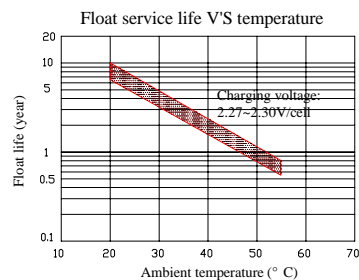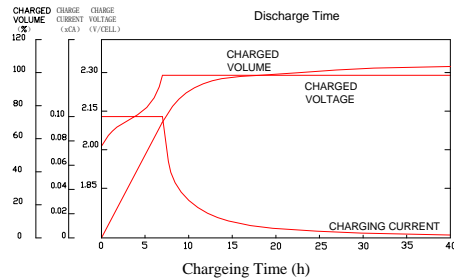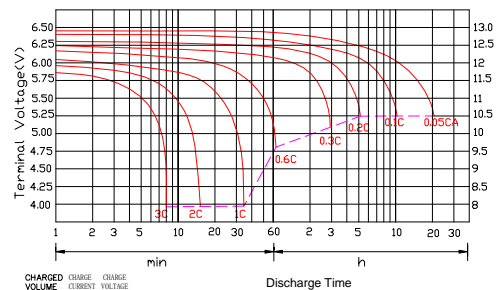

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	310	213	172	108	65.0	26.4	18.5	10.3	5.35
10.2V	295	202	165	102	62.4	26.0	18.2	10.2	5.35
10.5V	277	190	157	96.7	59.3	25.5	17.8	10.0	5.30

Constant Wattage Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	3255	2300	1889	1183	741	310	219	123	64.2
10.2V	3092	2185	1813	1142	711	306	215	122	64.2
10.5V	2907	2054	1722	1085	676	300	210	119	63.6