
Applied Scope









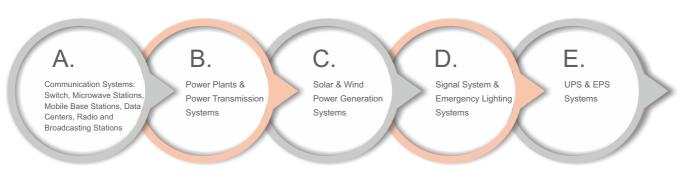



Product Characteristic

- European dwarf standard structure, streamline design, elegant appearance.
- The unique self-absorption technology elongated plate, can effectively extend battery life.
- With special design, the battery will not reduce the amount of electricity fluid during use, even no necessary to add any water during using life time
- Uses a unique corrosion-resistant grid alloy, special lead paste formulation, battery has excellent over-discharge resilience, floating use has longer service life
- All with high purity raw materials, battery self-discharge is minimal.
- Using gas compounds technology, the battery has a high sealing reaction efficiency, no mist precipitation, safety and environmental protection, pollution-free.

Science and technology innovation, quality and safety





Technical Specification

Model	Nominal Voltage (V)	Capacity (Ah)	Dimension (mm/Kg[(±5%)])					Tamain	Lavout
			Length	Width	Height	Total Height	Weight	Terminal	Layout
GM200-2	2	200/10HR	172	110	330	367	13.0	T5	G
Gm300-2	2	300/10HR	172	150	330	365	19.0	T5	G
GM400-2	2	400/10HR	211	175	330	368	26.5	T5	Н
GM500-2	2	500/10HR	241	172	330	366	31.0	T5	Н
GM600-2	2	600/10HR	301	175	330	368	38.0	T5	Н
GM800-2	2	800/10HR	411	175	330	365	53.0	T5	I
GM1000-2	2	1000/10HR	474	175	328	366	62.0	T5	I
GM1500-2	2	1500/10HR	401	347	342	378	101.0	T5	J
GM2000-2	2	2000/10HR	490	349	342	383	131.0	T5	К
GM3000-2	2	3000/10HR	711	353	342	383	200	T5	К

• Remarks:Products specifications are subject to change without notice.