



## DJM1265S (12V65AH)

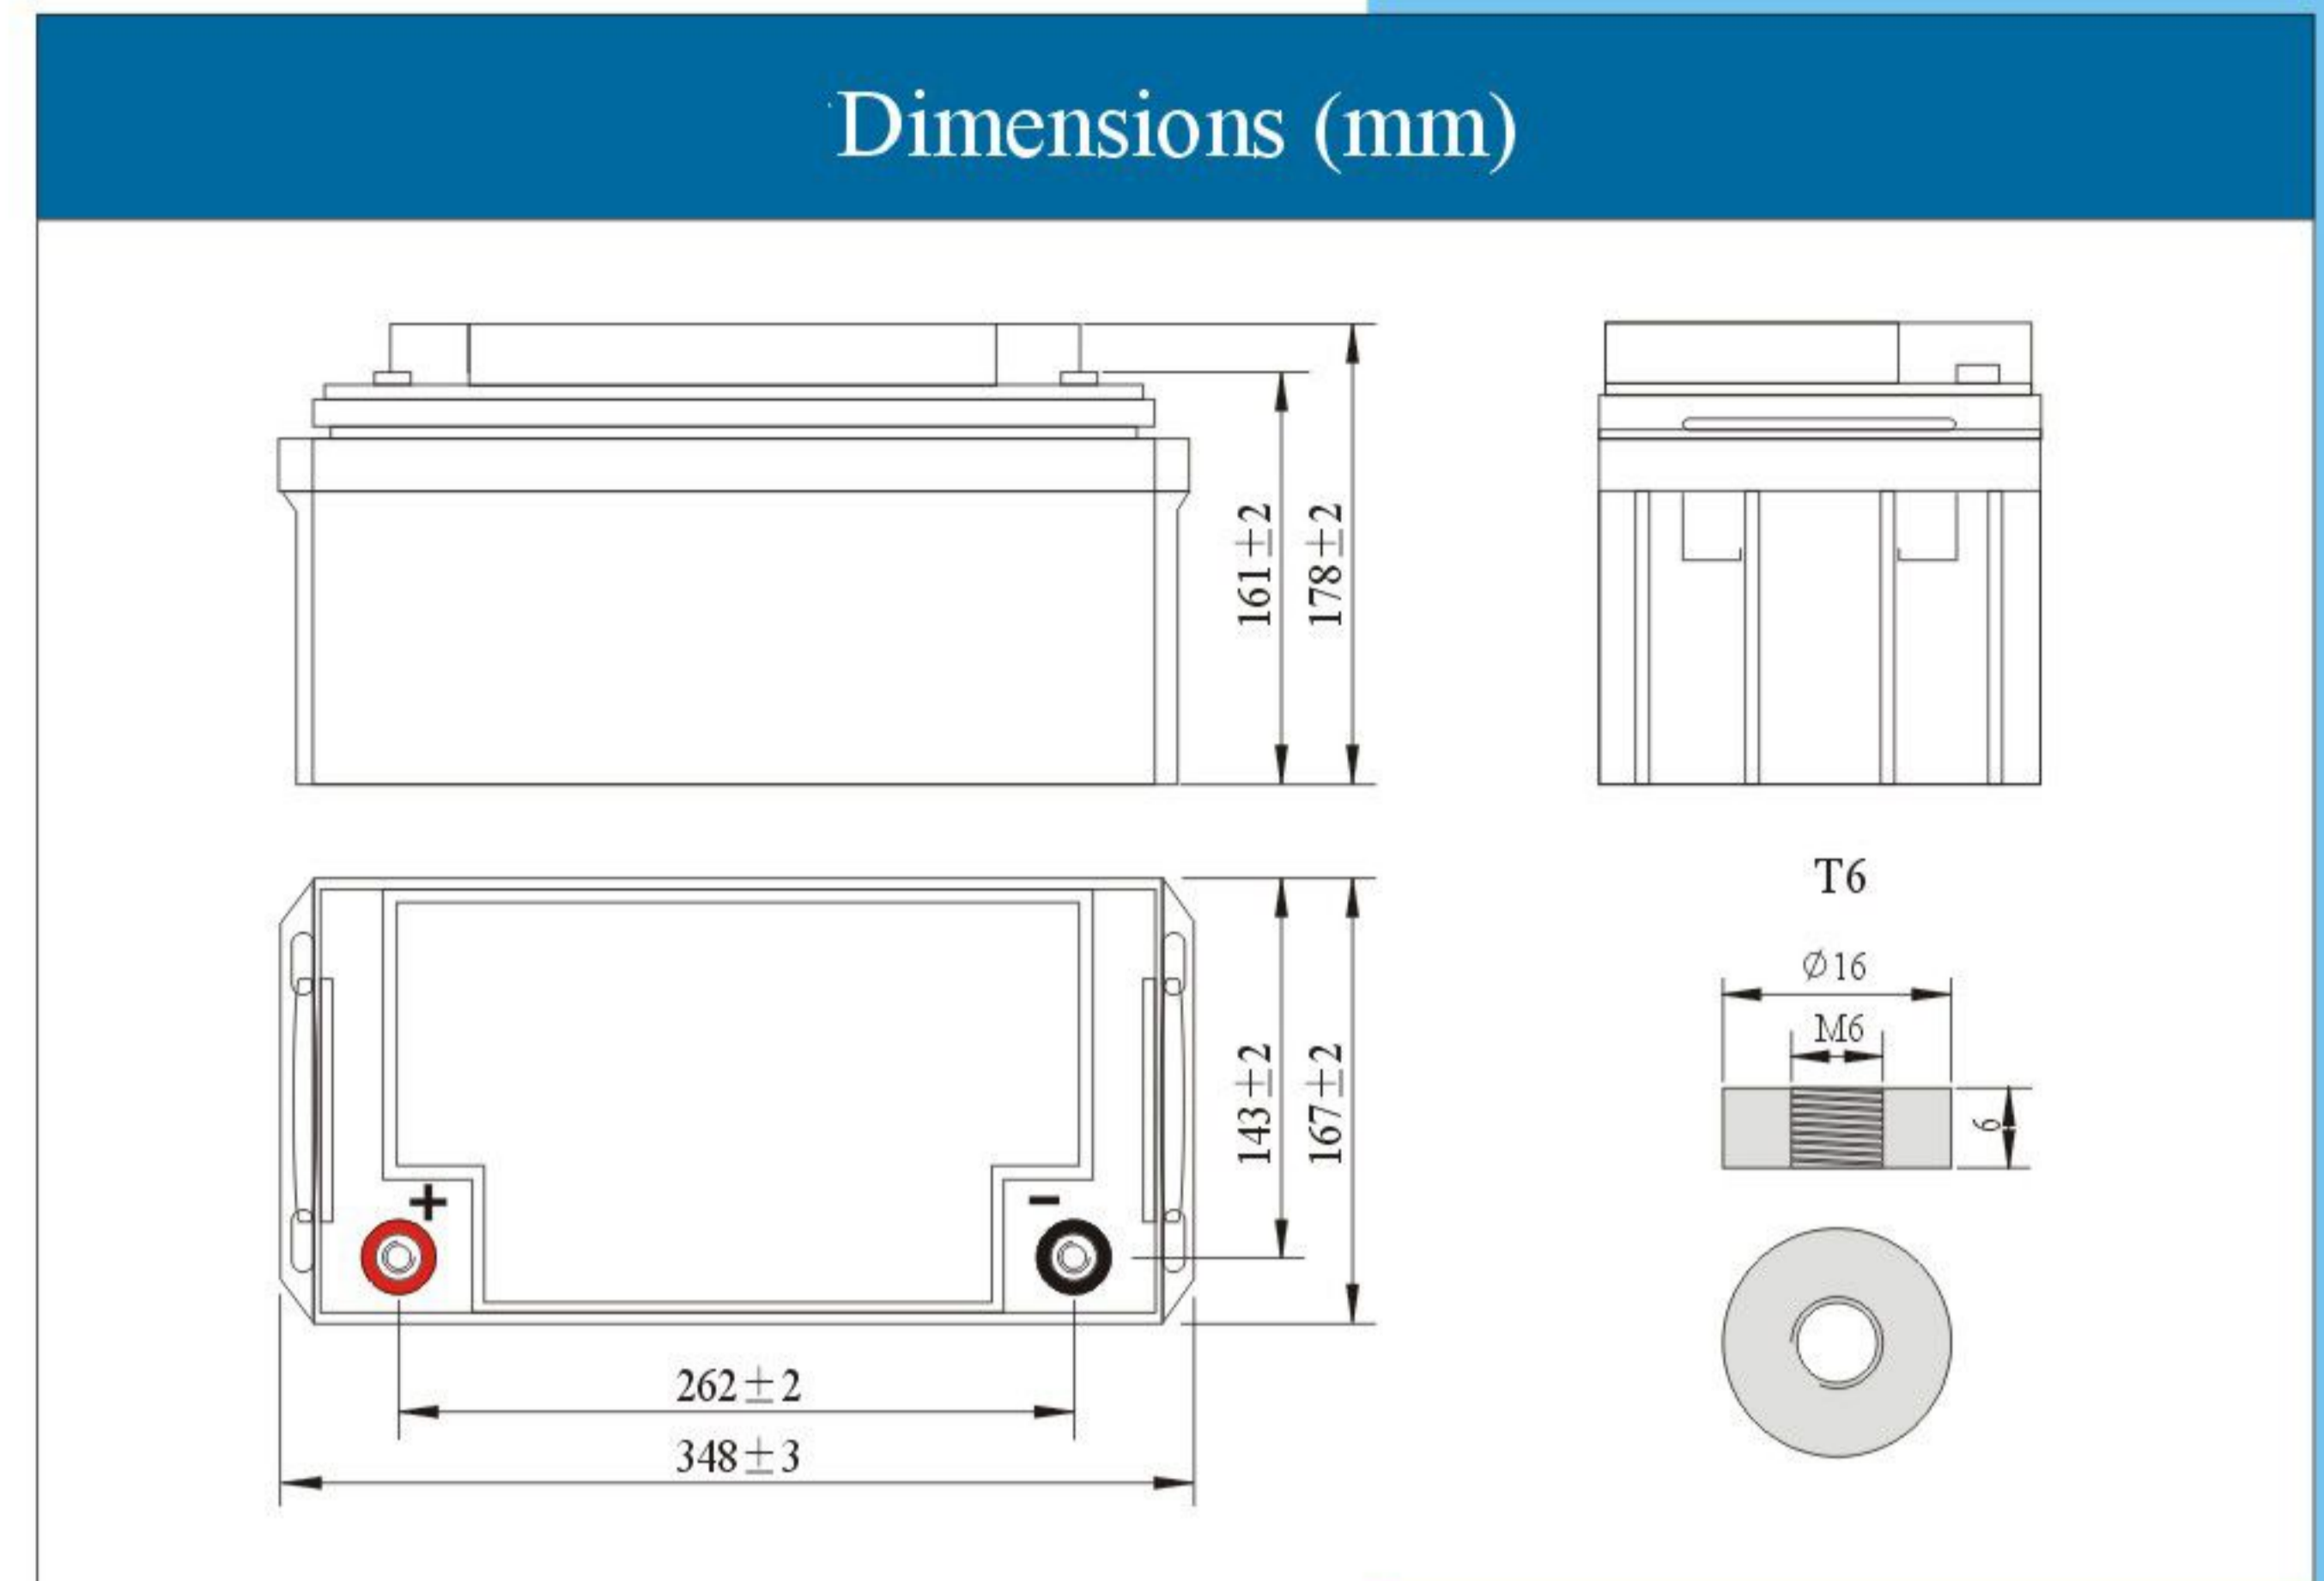


### Battery Specification

Nominal Voltage		12V
Nominal Capacity (20HR)		65AH
Dimension	Length	348 ± 3mm
	Width	167 ± 2mm
	Container Height	178 ± 2mm
	Total Height	178 ± 2mm
Approx Weight		19.2kg
Standard Terminal		T6

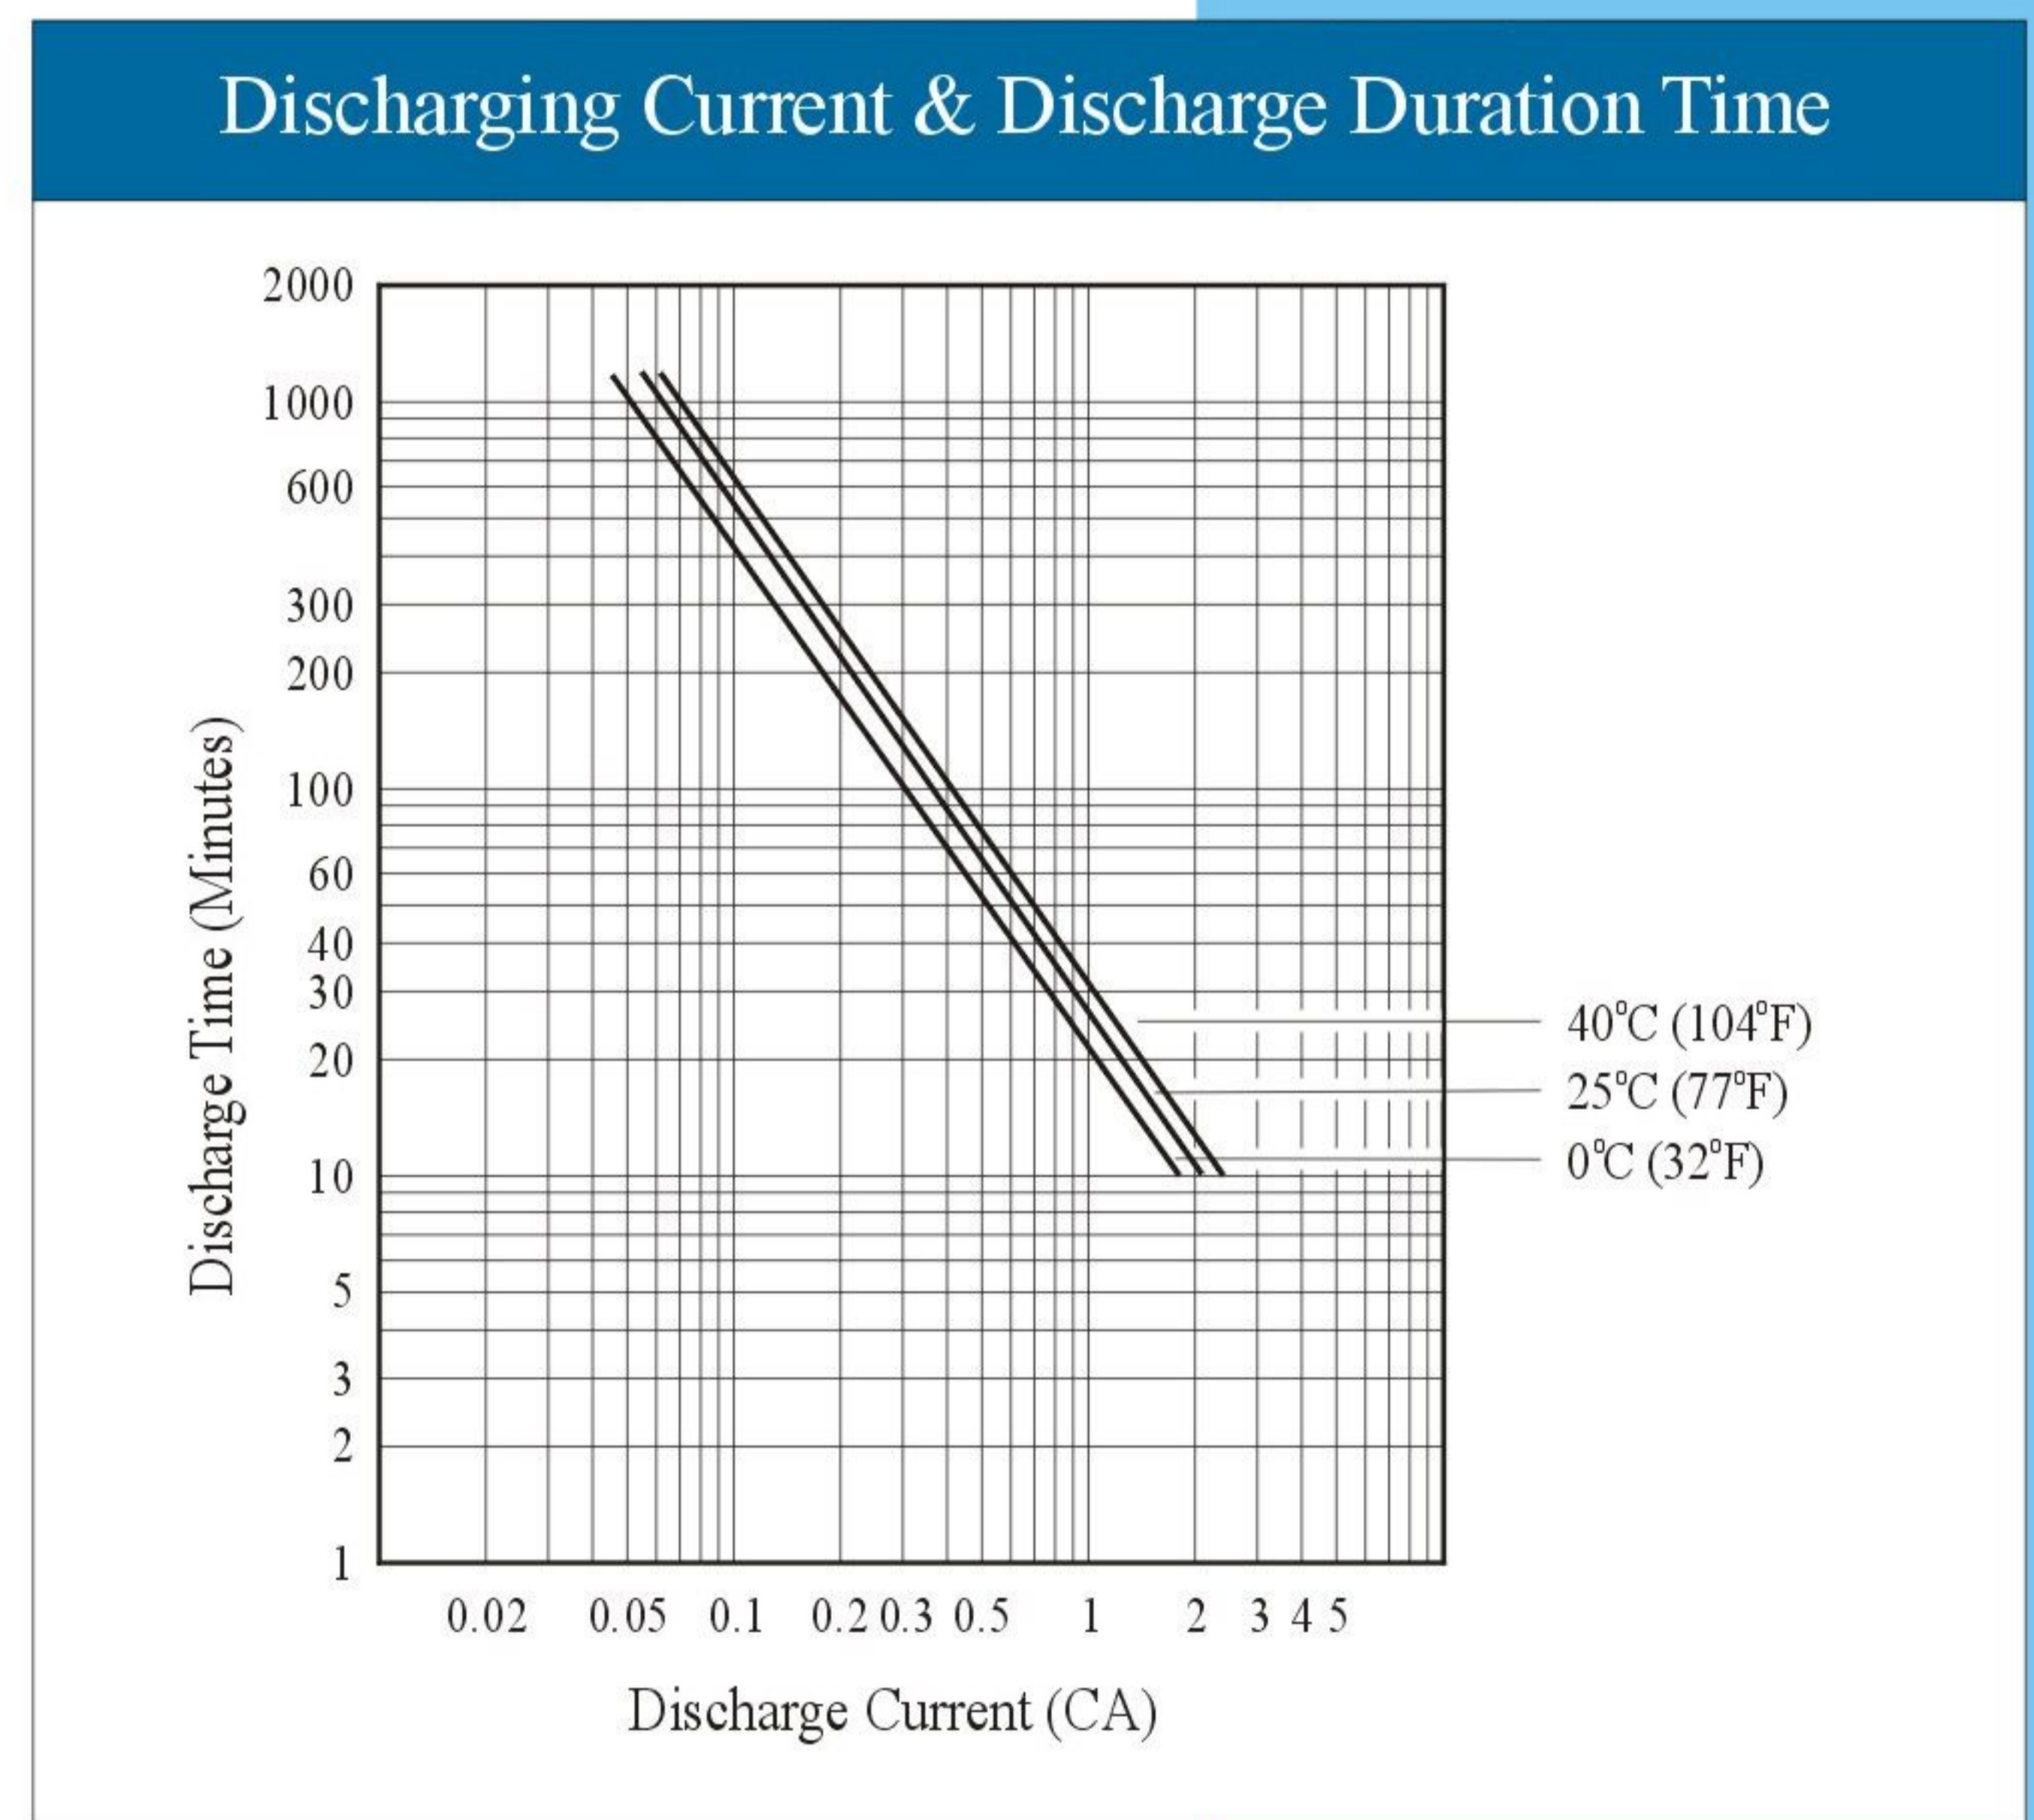

### Electrical Specification

Rated Capacity	20 hr (3.25A)	65.0AH	Constant-Voltage Charge	Cycle Use	Initial Charging Current less than: 19.5A Charging Voltage: 14.4~15.0V at 25°C(77°F) Temperature Coefficient: -30mV/°C
	10 hr (6.08A)	60.8AH			
	5 hr (10.7A)	53.5AH			
	3 hr (16.2A)	48.6AH			
	1 hr (37.8A)	37.8AH			
Capacity affected by Temperature	40°C(104°F)	103%	Float Use	No limit on initial Charging Current. Charging Voltage: 13.5~13.8V at 25°C(77°F) Temperature Coefficient: -20mV/°C	
	25°C(77°F)	100%			
	0 °C(32°F)	86%			

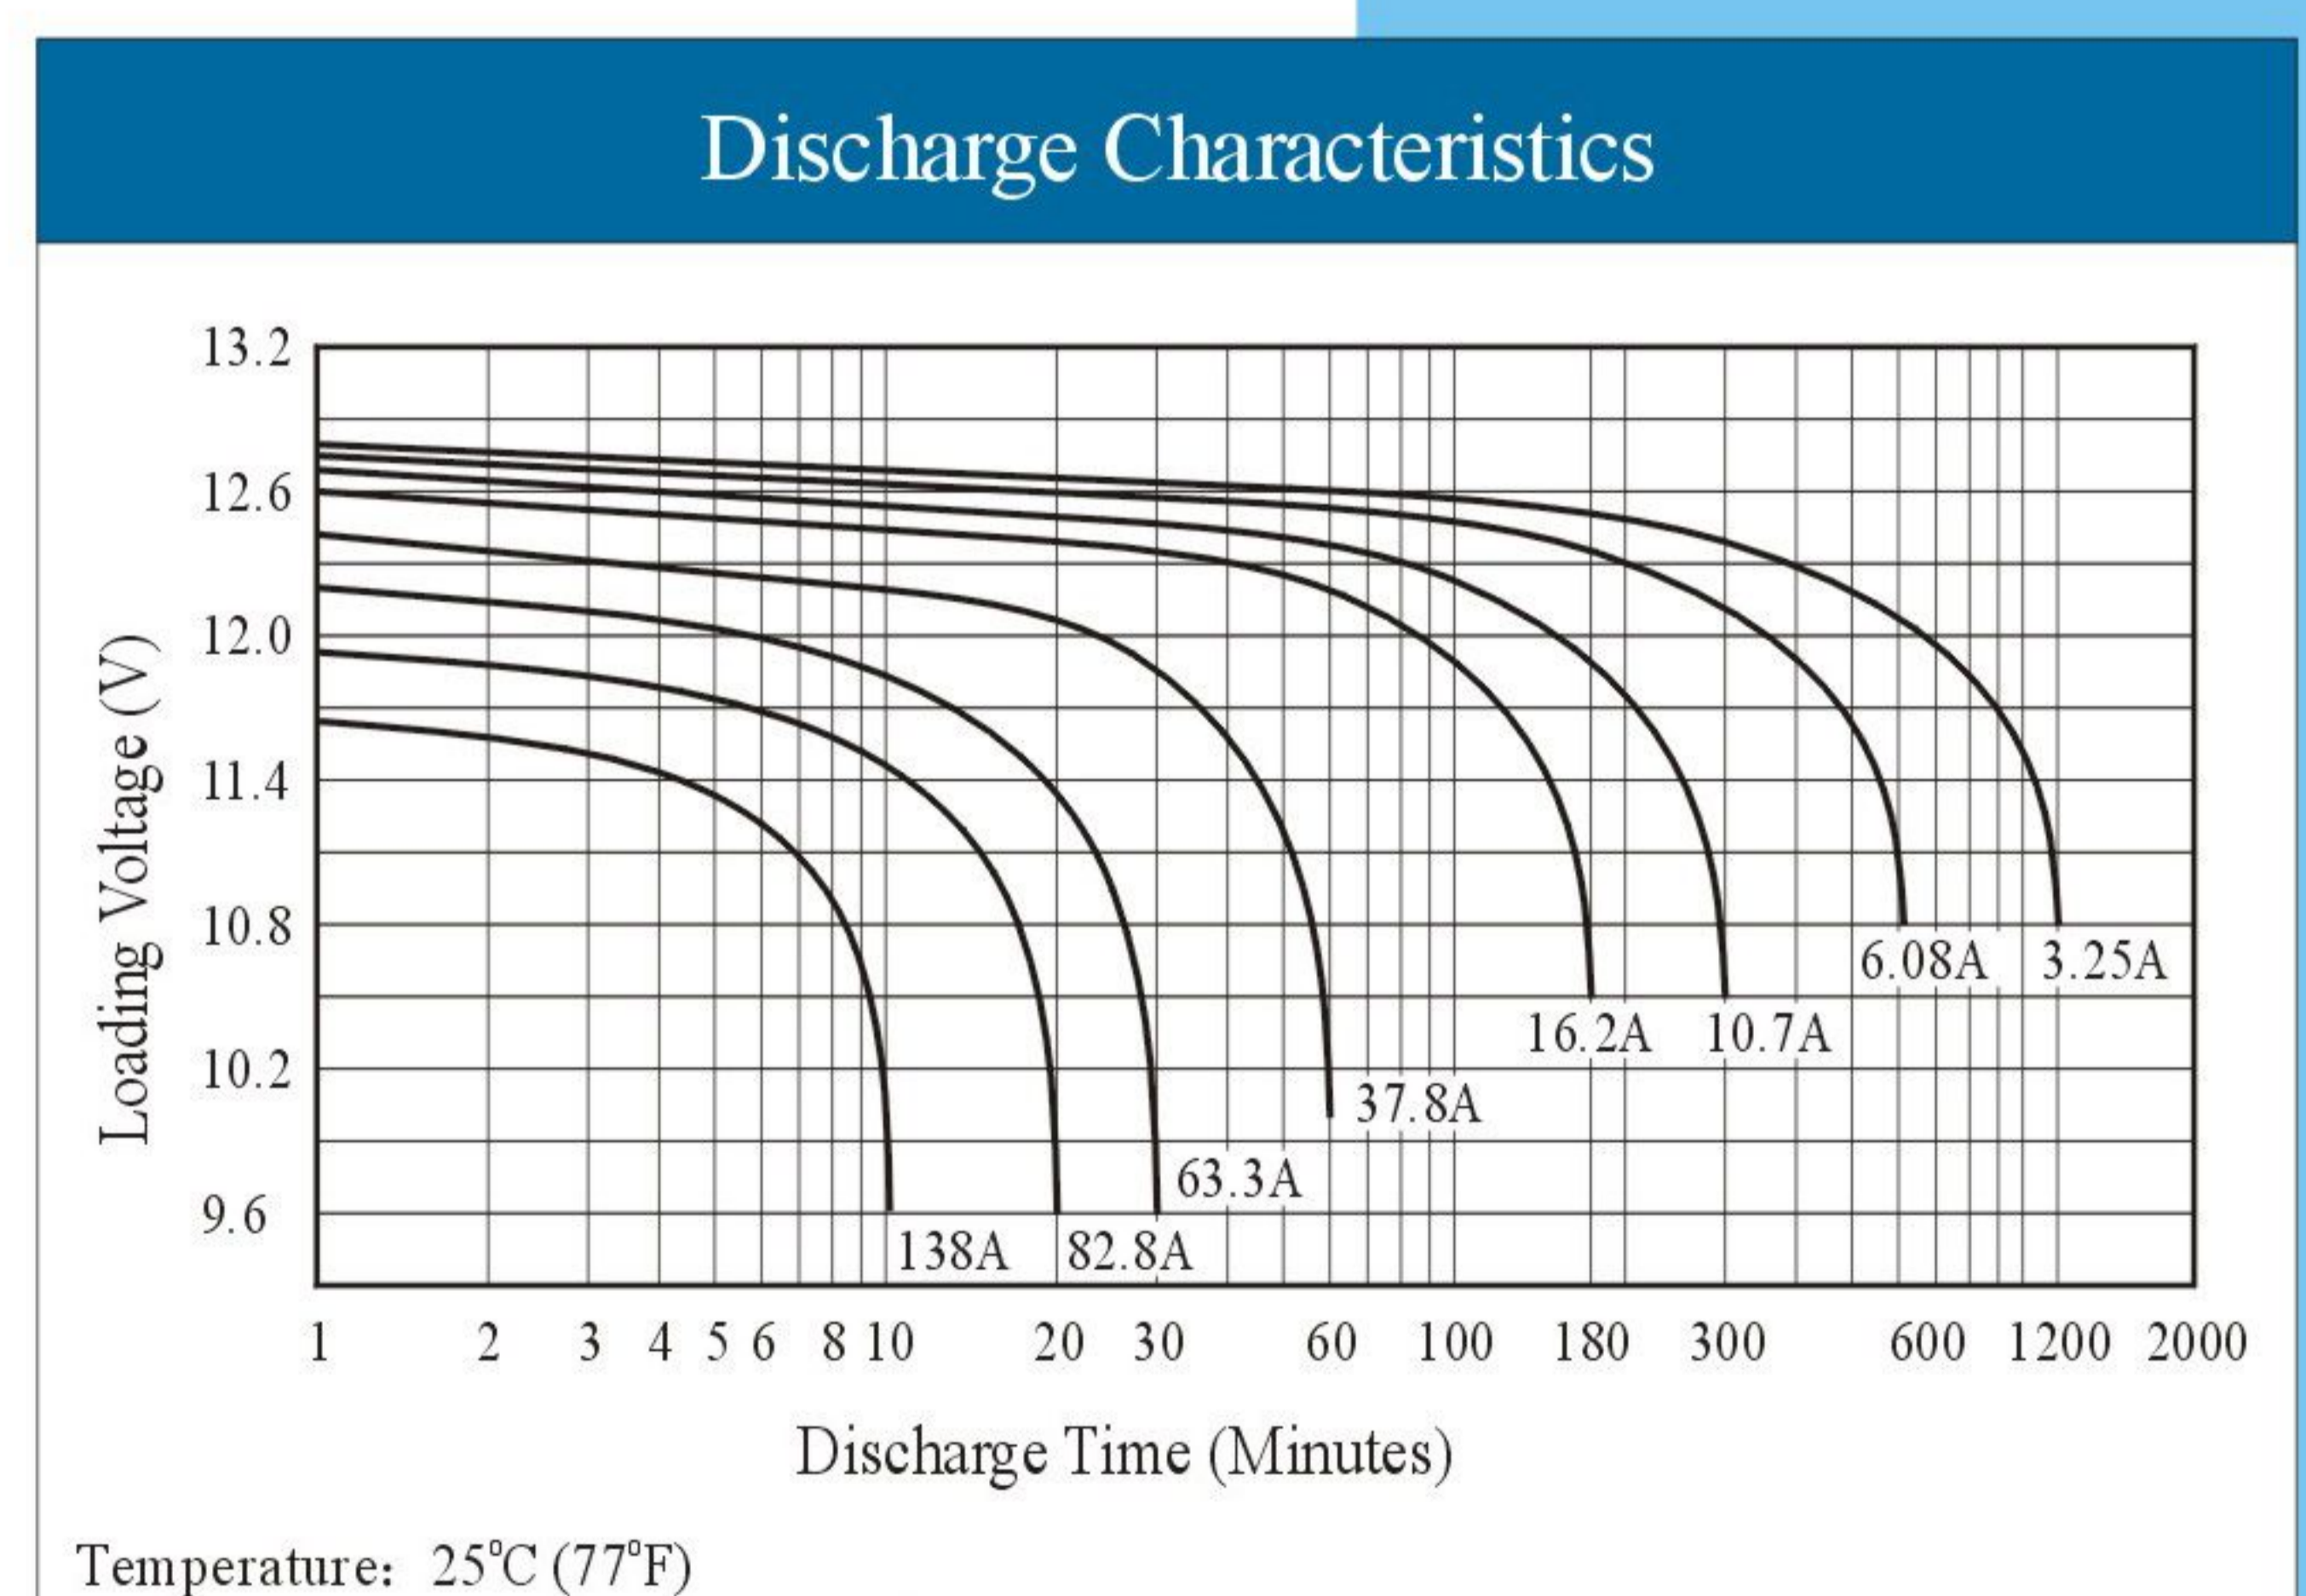

### Constant Current (Amp) and Constant Power (Watt) Discharge Table

Temperature: 25°C (77°F)

Discharge Time(min) Final Voltage / Cell	10	15	20	30	45	60	120	180	240	300	360	480	600	1200
	1.60	1.60	1.60	1.60	1.60	1.67	1.70	1.75	1.75	1.75	1.75	1.80	1.80	1.80
Current (Amp)	138	101	82.8	63.3	46.8	37.8	22.1	16.2	12.8	10.7	9.30	7.41	6.08	3.25
Power (Watt)	235	177	148	115	86.7	71.5	42.4	31.4	24.9	20.9	18.2	14.6	12.0	6.43