



UN134-12HX (12V134Ah/10hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and thus immobilized.

Should the battery be accidentally overcharged producing hydrogen and oxygen, Special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Feature

- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

SPECIFICATION

Nominal voltage 12V
 Number of cell 6
 Length(mm/inch) 341/13.4
 Width(mm/inch) 173/6.81
 Height(mm/inch) 283/1.14
 Total Height(mm/inch) 288/11.3
 Approx. Weight(kg/lbs) 42.5/93.7

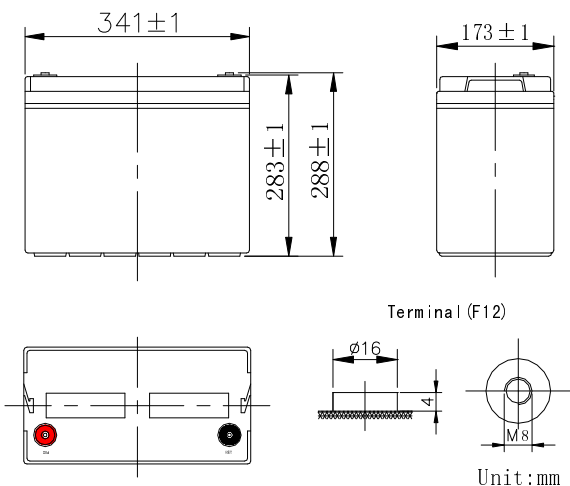

Performance Characteristics

Capacity 77°F(25°C)	20 hour rate (7.1A、10.8V)	142Ah
	10 hour rate (13.4A、10.8V)	134Ah
	5 hour rate (25A、10.5V)	125Ah
	1 hour rate (94A、9.6V)	94Ah
Internal Resistance	Full charged Battery77°F(25°C): 4mΩ	
Capacity affected by Temperature (10 hour rate)	104° F(40°C)	102%
	77° F(25°C)	100%
	32° F(10°C)	85%
	5° F(-15°C)	65%
Self-Discharge 68°F(20°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12month storage	60%
Max. discharge current77°F(25°C): 1000A(5S)		
Charge (Constant Voltage)	Float: 13.6~13.8 V/77° F(25°C)	
	Cycle:14.4~14.7 V/77°F(25°C) Max. Current: 33.5A	









Discharge Constant Current (Amperes at 77° F25 °C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	473	319	253	158	94.0	40.1	26.1	13.9	7.35
1.65V	456	306	242	150	90.0	39.1	25.8	13.8	7.30
1.70V	440	293	231	141	86.0	38.0	25.4	13.7	7.25
1.75V	423	279	220	132	82.0	36.9	25.0	13.6	7.20
1.80V	405	265	207	121	77.0	35.7	24.5	13.4	7.10

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	805	561	508	299	224	182	108	72.6	52.8
1.65V	761	534	485	278	218	178	106	71.6	52.3
1.70V	717	504	460	258	213	175	104	70.6	51.7
1.75V	673	472	435	237	207	172	102	69.6	51.1
1.80V	621	440	402	213	200	167	98.8	68.3	50.5

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

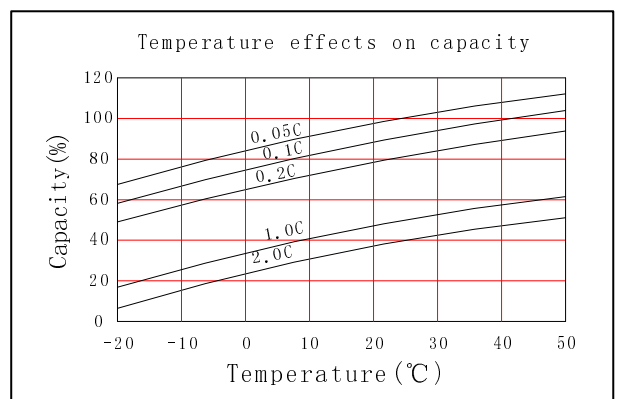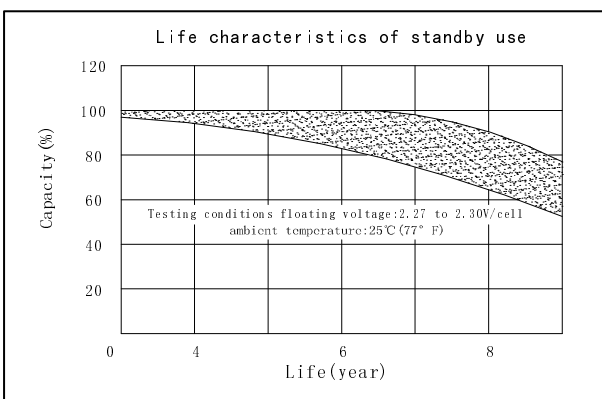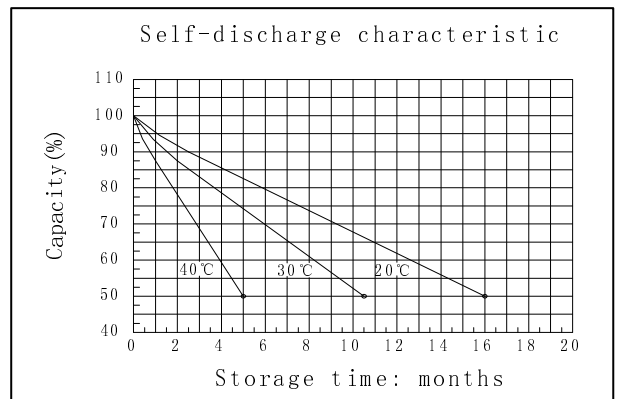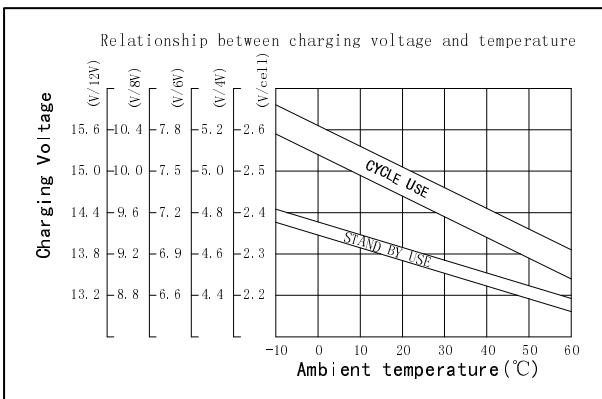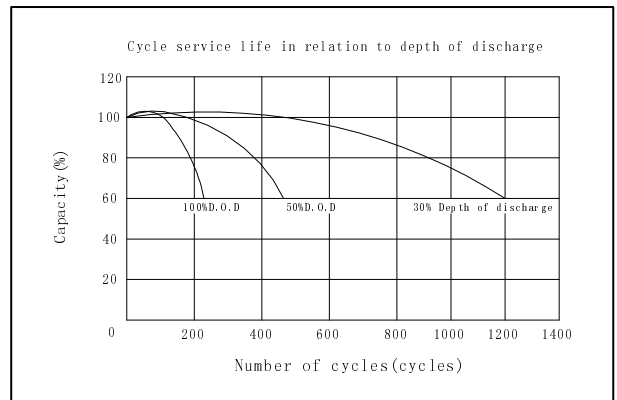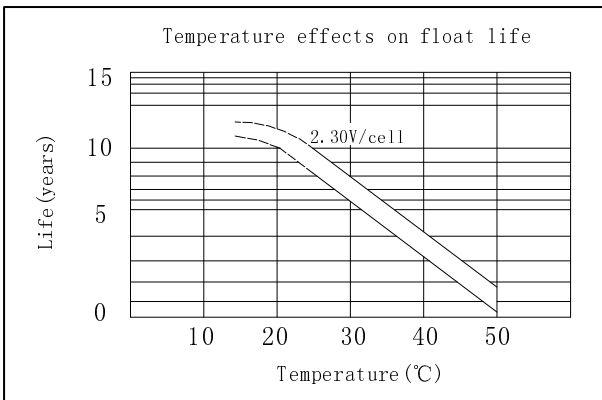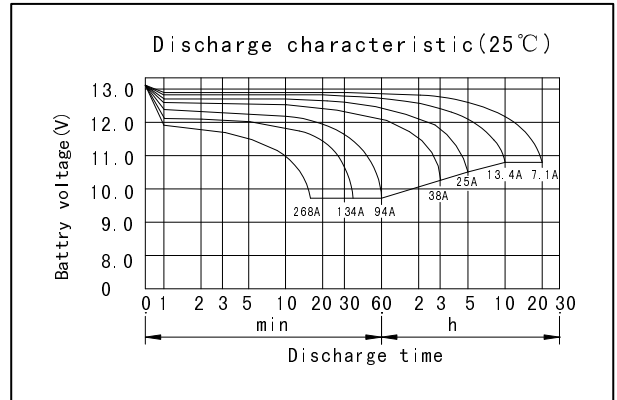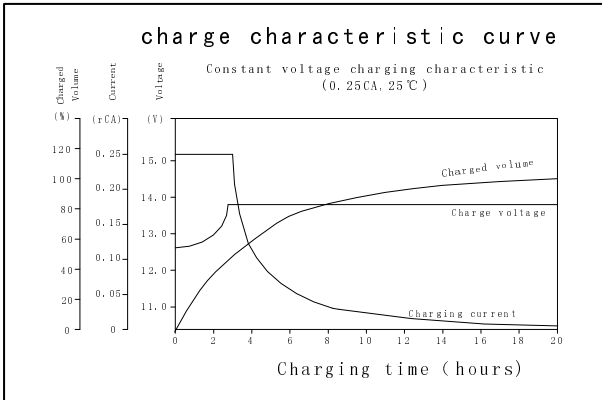

DONGGUAN OREMA POWER CO., LTD

Add: #1 Qilin Road Shahu, Tangxia Town, Dongguan Guangdong China

TEL: +86-769- 3896 1163 +86-769- 3896 1168

FAX: +86-769- 3896 1169



www.oremabattery.com