


# 12V9.0Ah

The battery is constructed by plates, separators, safety valves and container.  
 Since the electrolyte is held by a glassmat separator and plates, the battery can use in any direction and position without leakage.

## Outer Dimensions

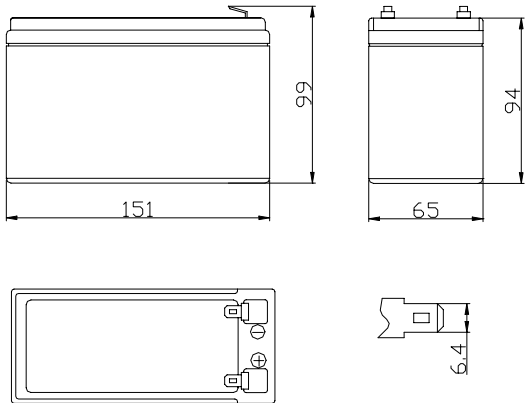

## Performance Characteristics

Nominal Voltage .....	12V
Number of cell .....	6
Design Life .....	5 years
Nominal Capacity 77°F(25°C)	
20 hour rate(0.45A,10.5V) .....	9.0Ah
10 hour rate(0.84A,10.5V) .....	8.4Ah
5 hour rate (1.54 A,10.5V) .....	7.7Ah
1 hour rate(5.85A,9.6V) .....	5.85Ah
Internal Resistance	
Fully Charged battery 77°F(25°C) .....	40 mΩ
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operation Temperature Range	
Discharge .....	-20~60°C
Charge .....	-10~60°C
Storage .....	-20~60°C
Max.Discharge Current 77°F(25°C) .....	96A(5s)
Short Circuit Current .....	120A

## Dimensions and Weight

Length ( mm / inch ) .....	151 / 5.94
Width ( mm / inch ) .....	65 / 2.56
Height ( mm / inch ) .....	94 / 3.70
Total Height ( mm / inch ) .....	99 / 3.90
Approx.Weight( Kg / lbs ) .....	2.80 / 6.17







## Battery Construction

COMPONENT	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
RAW MATERIAL	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## Charging Methods

Application	Charging method	Charging Voltage at 25° C	Temperature compensation coefficient of charging voltage	Max.charging current	Charging time 25°C(h)		Temp (° C)
					100% discharge	50% discharge	
For standby power source	Constant voltage & Constant Current Charging (with current restriction)	13.4-13.8V	-18 mV/° C	2.4A	24	20	0~40 (32~104° F)
For cycle service		14.5-15.0V	-30 mV/° C	2.4A	16	10	

# 12V9.0Ah

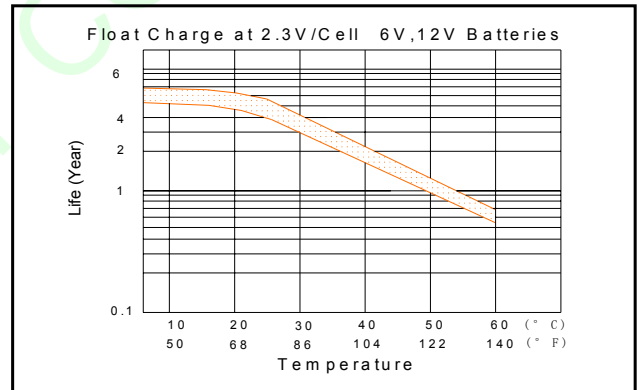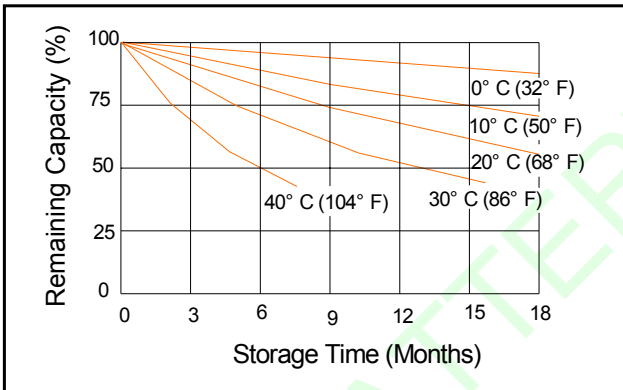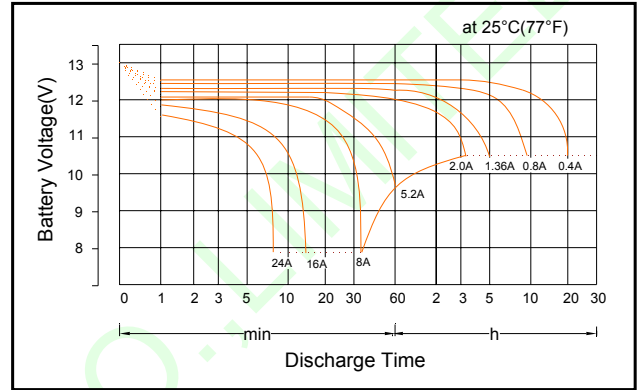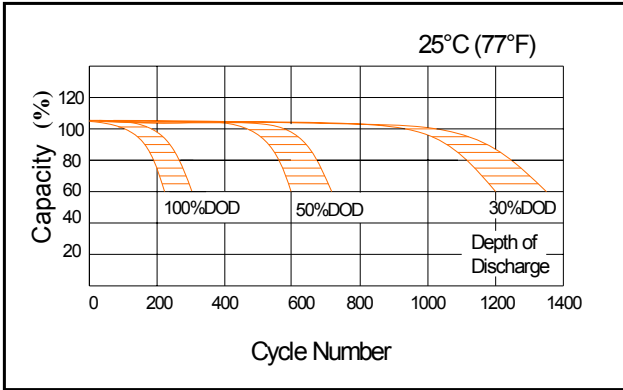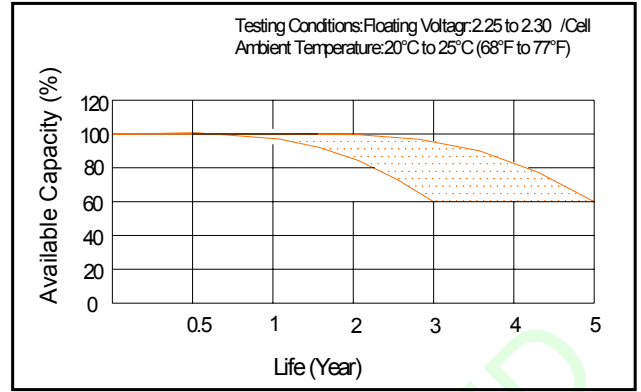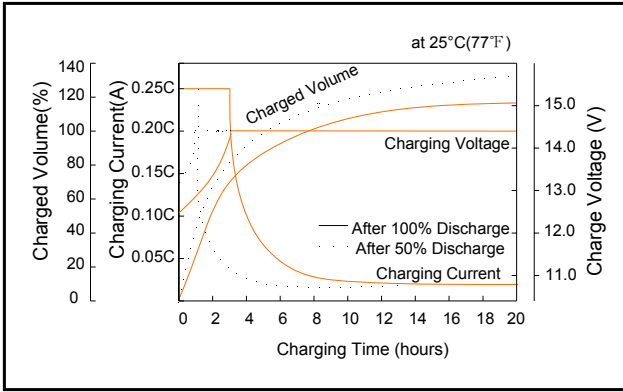

### Discharge Constant Current (Amperes at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
9.60V	28.0	22.4	16.0	9.20	6.56	5.20	2.80	2.02	1.38	0.90	0.75	0.41
9.90V	27.2	21.6	15.2	9.04	6.48	5.16	2.78	2.02	1.37	0.90	0.75	0.41
10.20V	25.6	20.0	14.4	8.80	6.40	5.12	2.76	2.00	1.36	0.90	0.74	0.40
10.50V	22.4	16.8	13.6	8.32	6.32	5.04	2.72	1.98	1.36	0.89	0.74	0.40
10.80V	20.0	14.4	12.8	7.20	6.24	4.96	2.64	1.92	1.34	0.89	0.73	0.39

### Discharge Constant Power (Watts/cell at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
9.60V	306	245	177	107	75.0	60.0	32.3	23.4	16.0	10.5	8.76	4.80
9.90V	293	235	167	103	73.8	59.0	32.0	23.3	15.8	10.4	8.76	4.80
10.20V	280	221	159	98.4	73.2	59.0	31.8	23.2	15.7	10.4	8.76	4.74
10.50V	245	187	151	92.4	72.0	58.1	31.3	22.9	15.7	10.3	8.64	4.68
10.80V	218	168	142	80.4	70.8	57.1	30.4	22.2	15.6	10.3	8.52	4.56

WBR BATTERY CO., LIMITED

Add: Bldg 1, DongFangMingZhu Cheng, LongHe Road, LongGang District, Shenzhen, China.

TEL: +86 28169737

FAX: +86 28197404

E-mail: sales@wbr-battery.com

http://www.wbr-battery.com