



6FM50G/F (12V50Ah)

LONGWAY® Standard battery is design for a general purpose by KaiYing Power. 6FM50G is a general purpose battery up to 5 years in star service or more than 260 cycles at 100% discharge in cycle service. As with all **LONGWAY®** batteries, all are rechargeable highly efficient, leak proof and maintenance free.



ISO 9001:2008 Standard




ISO 14001:2004 Standard



Specifications:

Cells per Unit	6
Normal Voltage	12V
Capacity	50Ah@20Hr-rate to 1.75V per cell@25°C
Weight	Approx.(16.1±3%kg) (35.49lbs)
Maximum Discharge Current	500A(5sec)
Internal Resistance	Approx. 8mΩ full charged @25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Nominal Operating Temperature Range	25°C±3°C(77°F±5°F)
Float Charging Voltage	13.7~13.9VDC/unit Average @25°C
Maximum Charging Current	13.5A
Equalization and Cycle Service	14.4V~15.0VDC/unit Average @ 25°C
Self Discharge	LONGWAY Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F20/F9
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request

Dimensions: L229*W138*H208(TH229)mm

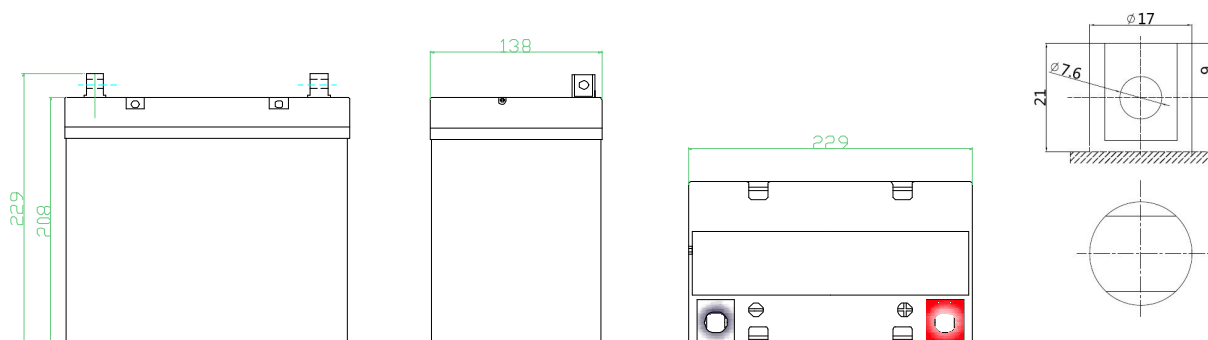

Constant Current Discharge Characteristics (A, 25 °C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	149.0	123.0	96.6	58.8	32.5	19.5	14.7	9.4	6.09	5.08	2.66
9.90	144.5	119.3	94.7	57.6	31.9	19.4	14.6	9.4	6.06	5.05	2.65
10.2	141.6	116.9	92.7	56.4	31.2	19.3	14.5	9.3	6.04	5.03	2.64
10.5	133.4	113.2	89.8	54.6	30.2	19.1	14.4	9.2	6.02	5.02	2.63
10.8	122.2	109.8	88.1	53.6	29.6	18.9	14.2	9.1	6.00	5.00	2.63

Constant Power Discharge Characteristics (Watt, 25 °C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	1609	1343	1072	659	371	226	173	112	73.1	60.6	32.0
9.90	1561	1303	1039	646	363	225	172	111	72.7	60.3	31.8
10.2	1529	1276	1018	633	356	223	171	110	72.4	60.1	31.7
10.5	1440	1236	986	613	345	221	169	109	72.2	59.9	31.6

10.8	1320	1199	967	601	338	218	167	108	72.0	59.7	31.5
------	------	------	-----	-----	-----	-----	-----	-----	------	------	------


Trickle (or Float) Service Life

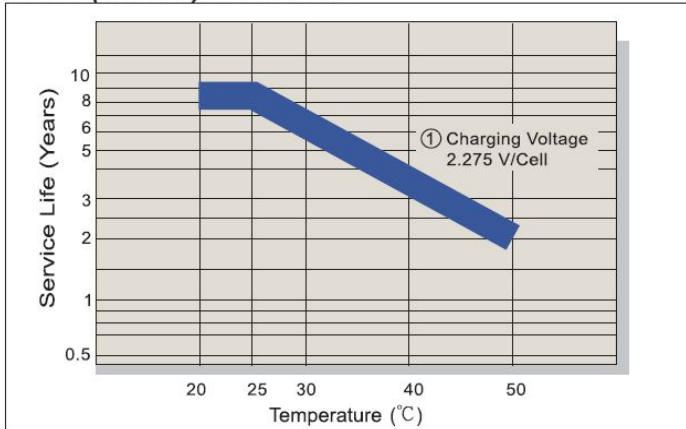


Capacity Retention Characteristic

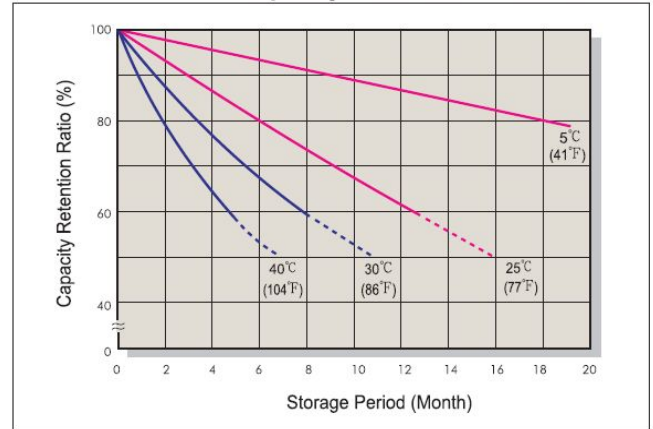


Battery Voltage and Charge Time for Standby Use

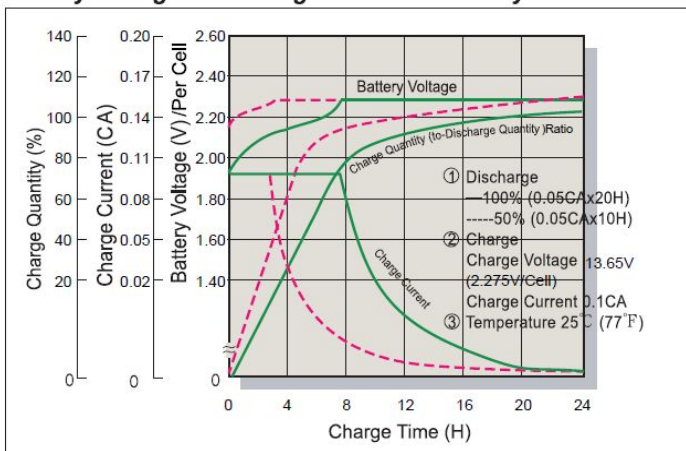


Cycle Service Life

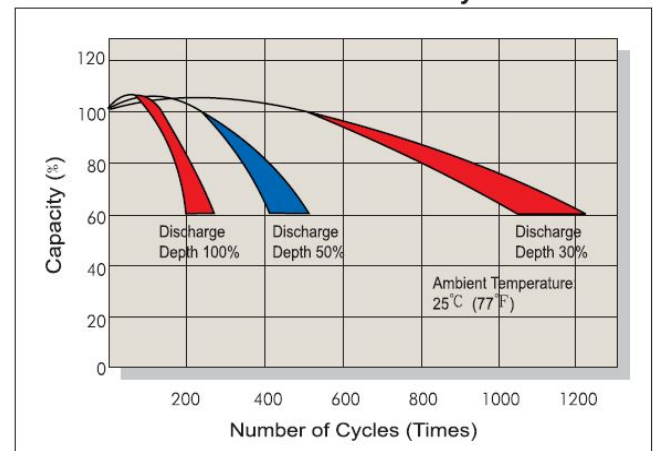

Battery Voltage and Charge Time for Cycle Use

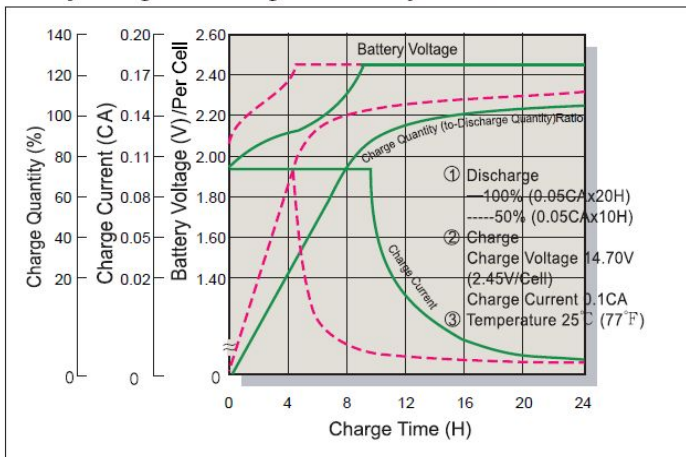

Terminal Voltage (V) and Discharge Time

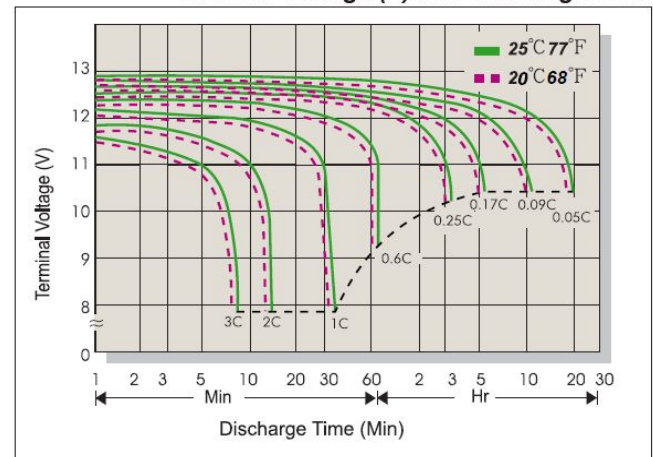

Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.25C
Standby	25°C(77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C>(A)	0.2C<(A)	0.5C<(A)	(A)>1.0C

KaiYing Power Supply & Electrical Equip Co., Ltd.

Address: KaiYing Industrial Park, ChengXiang Town, Anxi, Quanzhou, Fujian China

Tel:86-595-68782266 Fax: 86-0595-68782222

Website: www.longwaybattery.com Email: Sales@longwaybattery.com