



Specifications

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	5Ah
	10HR(10.5V)	4.7Ah
	1HR(9.60V)	3.28Ah
Dimension	Length	90 ± 1mm (3.54inch)
	Width	70 ± 1mm (2.76inch)
	Height	101 ± 1mm (3.98inch)
	Total Height	107 ± 1mm (4.21inch)
Approx. Weight		1.65kg (3.64lbs) ± 5%
Terminal type		T1/T2
Internal resistance (Fully charged, 25°C)		Approx. 26mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		1.5A
Terminal material		Copper
Maximum discharge current		75A(5 sec.)
Designed floating life(20°C)		3~5 years

Dimensions

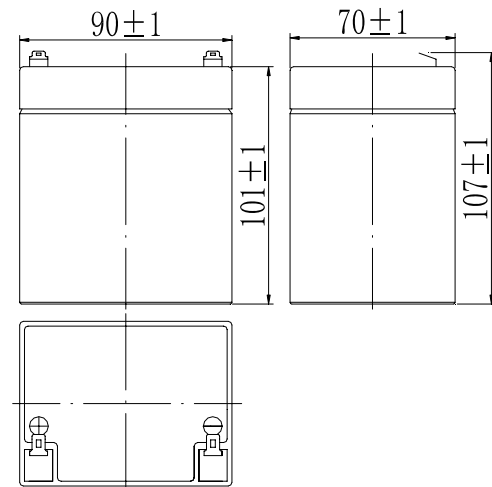

Terminal

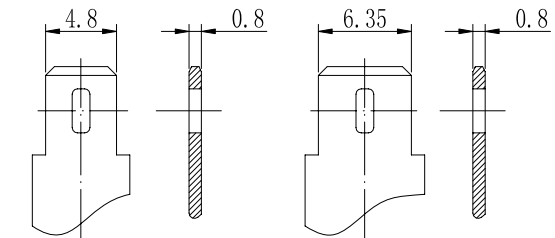

Terminal T1

Terminal T2

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)



F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	19.4	12.2	9.60	5.35	3.28	1.78	1.28	1.02	0.87	0.47	0.25
9.90V	18.8	11.9	9.36	5.25	3.23	1.77	1.27	1.01	0.86	0.47	0.25
10.2V	18.0	11.4	9.02	5.09	3.15	1.75	1.26	1.01	0.86	0.47	0.25
10.5V	17.2	10.9	8.71	4.96	3.09	1.72	1.25	1.00	0.85	0.47	0.25
10.8V	16.3	10.3	8.25	4.78	2.99	1.68	1.21	0.97	0.82	0.46	0.25

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	216	138	109	61.3	38.0	20.8	15.1	12.1	10.4	5.66	3.05
9.90V	210	134	107	60.1	37.4	20.7	15.1	12.1	10.3	5.64	3.03
10.2V	201	128	103	58.3	36.5	20.5	15.0	12.0	10.2	5.61	3.02
10.5V	192	123	99.3	56.9	35.8	20.2	14.9	11.9	10.1	5.58	3.00
10.8V	182	116	94.1	54.8	34.7	19.7	14.4	11.6	9.84	5.47	2.94

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25°C)

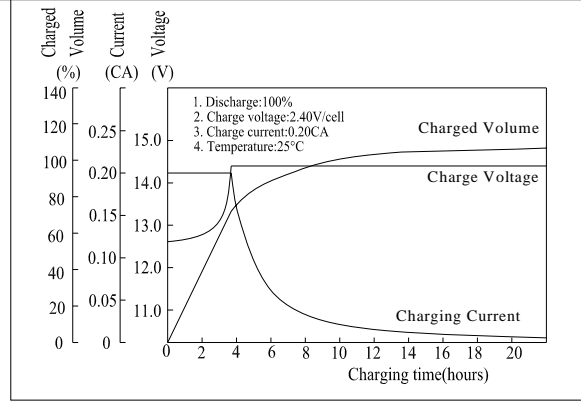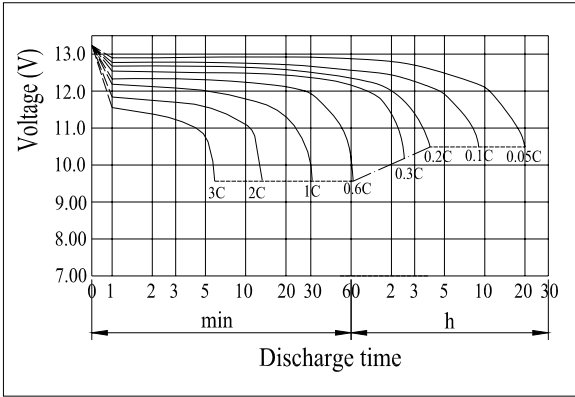


Effect of Temperature on Capacity

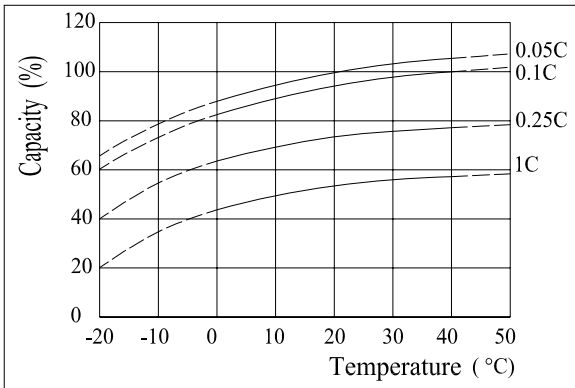


Self-discharge Characteristics

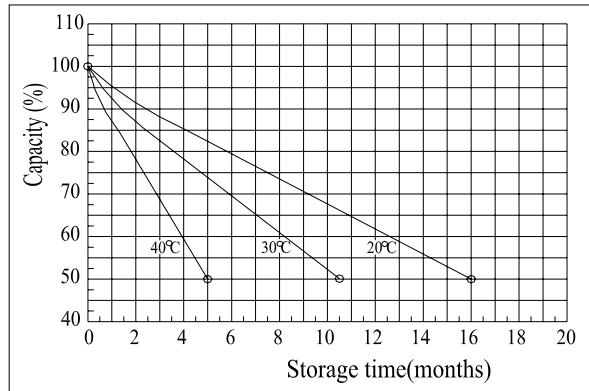


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

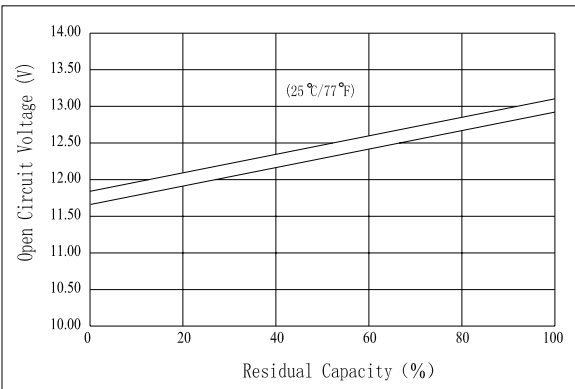


The Relationship for Charging Voltage and Temperature

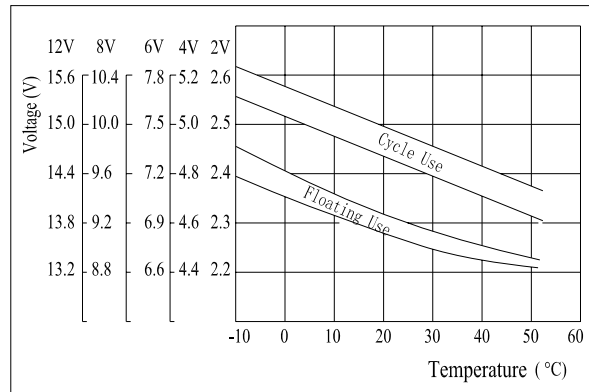

Floating Life on Temperature

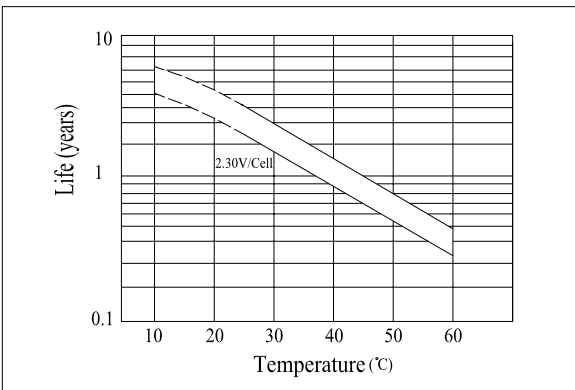

Cycle Life on D.O.D(25°C)

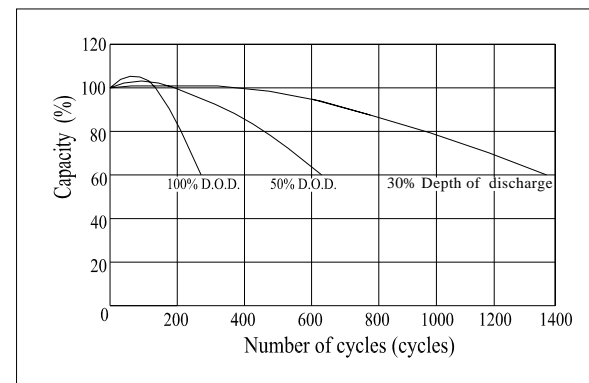

Charging Characteristics(25°C)