



ULTIMATE SOLAR BATTERIES




WWW.SPARCOINDIA.COM

Technical Specifications

SOLAR TUBULAR

| Battery Type | Capacity C ₁₀ Ah | Max. Dimensions Millimeters | | | Normal Weight (Kg.) (Sp. Gr. 1.230) | | Approx. Acid-Vol (Ltr.) | Normal Charging Current | Battery Layout |
|--------------|-----------------------------|-----------------------------|-----|-----|-------------------------------------|-----|-------------------------|-------------------------|----------------|
| | | L | W | H | DRY | WET | | | |
| 6ALS12 | 12 | 195 | 127 | 223 | 5.5 | 8.5 | 3 | 1.2 | A |
| 6ALS20 | 20 | 259 | 170 | 200 | 9.5 | 15 | 5.5 | 2.0 | A |
| 6ALS40 | 40 | 404 | 175 | 255 | 14 | 21 | 8 | 4 | A |
| 6ALS60 | 60 | 404 | 173 | 255 | 20 | 26 | 6 | 6 | A |
| 6ALS75 | 75 | 504 | 218 | 266 | 25 | 40 | 15 | 7.5 | A |
| 6ALS100 | 100 | 504 | 218 | 266 | 31 | 44 | 13 | 10 | A |
| 6ALS120 | 120 | 517 | 273 | 266 | 35 | 52 | 17 | 12 | A |
| 6ALS135 | 135 | 474 | 180 | 385 | 36 | 59 | 21 | 13.5 | A |
| 6ALS150 | 150 | 474 | 180 | 385 | 41 | 67 | 25 | 15 | A |
| 6ALS200 | 200 | 474 | 180 | 385 | 50 | 73 | 24 | 20 | A |


* Design and specification are subject to change without notice.



BENEFITS OF ALTIMA SOLAR

1. Low Maintenance.
2. Low Discharge.
3. Low Topping up.
4. Easy to install.
5. No Corrosion on exposed lead part.

FLOW CHART

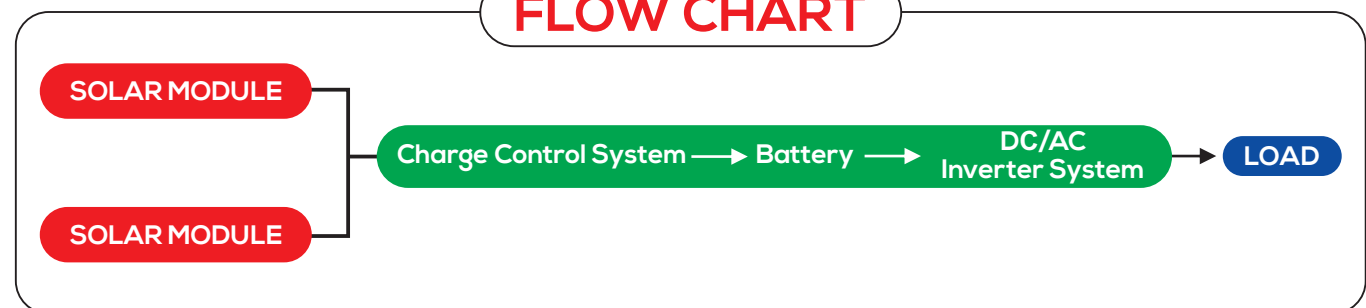

Sparco Batteries Pvt. Ltd.
(An ISO 9001:2000 Certified Company)



Technology Imported from U.S.A

Corporate/Regd. Office :
A-35/1, Maya Puri Indl. Area, Phase-I, New Delhi-64
Tel.: +91-11-28117658/28117680 | Mob.: 9911324365, 9811438870
E-mail : info@sparcoindia.com | Website : www.sparcoindia.com