




ENERGISING THE FUTURE...

SS160P

150Wp-160Wp



- Excellent Power Output with +ve Tolerance upto 4.9Wp
- 12 Years Limited Product Warranty
- 25 Years of Linear Power Guarantee
- High Performance Modules with efficiency up to 15.71%
- All the modules are PID resistant.
- F.S.I (Flame Spread Index) tested modules first in India
- 100% EL Tested

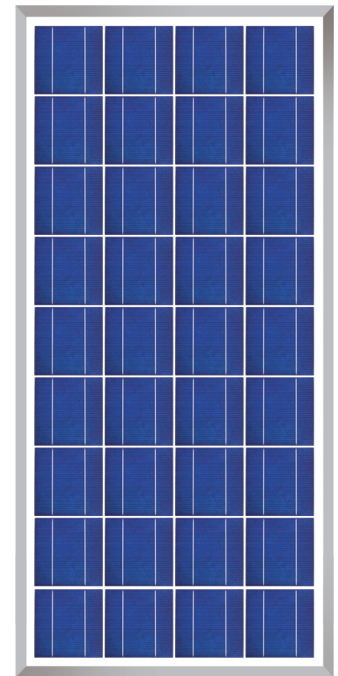

- The panels are constructed with Anti Reflective Coating (ARC) toughened low iron, textured high light transmission glass
- Multi layer tedlar and Fast Cure EVA
- Reinforced anodized Aluminium Frame
- Pre-drilled frame for easy mounting
- IP65 & IP67 rated Junction connector
- Solar MC4 compatible connector

APPLICATION



- On-grid system
- BIPV
- Solar Farms
- Standalone (off-grid) Systems

CONSTRUCTIONAL CHARACTERISTICS



- Frame
- Glass
- EVA
- Cells
- Back Sheet

CERTIFICATION




- IEC 61215 & 61730
- IEC 61701 (Salt Mist Test)
- MNRE (India) Certified
- ISO 9001-2008
- ISO 14001-2004




# SS160P

## 150Wp-160Wp


SPECIFICATIONS	SS150P*	SS155P	SS160P
	Cell Multi crystalline Solar Cell		
<b>Electrical Characteristics</b>			
Open Circuit Voltage (Voc)	22.23 V	22.36 V	22.51 V
Optimum Operating Voltage (Vmp)	18.11 V	18.20 V	18.30 V
Short Circuit Current (Isc)	8.74 A	8.92 A	9.11 A
Optimum operating Current (Imp)	8.31 A	8.52 A	8.76 V
Power at STC (Pmax)	150 W	155 W	160 W
Module Efficiency (η) %	15.21%	15.71%	16.22%
<b>Operating Conditions</b>			
	-40°C to +85°C at 85% RH		
Temperature Co-efficient for Voc/°C (β)		-0.34%	
Temperature Co-efficient for Isc/°C (α)		0.05%	
Temperature Co-efficient for power/°C (γ)		-0.43%	
NOCT		45°C ± 2°C	
<b>Mechanical Characteristics</b>			
Weight		11.3 Kg	
Module Dimension (L) X (W) X (D)		1481X666X35.3mm	
Mounting Hole (Oblong)		8X10 mm	
Mounting Hole CTC distance - vertical		800 mm	
Mounting Hole from corner (h)		340.5 mm	
Mounting Hole CTC distance - horizontal		630 mm	



**Light-Level Performance for Isc and VOC**

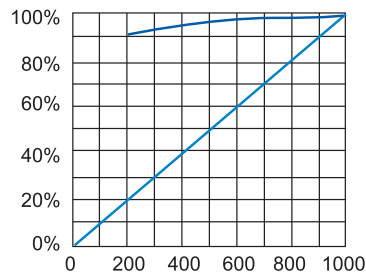

**Linear Power Guarantee on Sovasolar PV Modules**  
97% upto 1 year then @ 0.7%/year

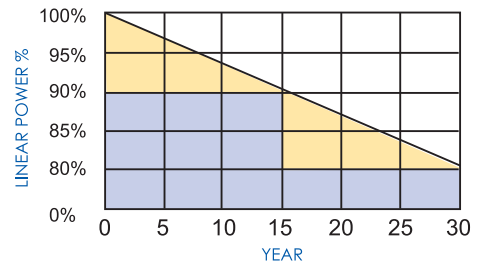

\* SUBJECT TO AVAILABILITY OF CELLS

DLF GALLERIA, Office No. DGK 917, 9th floor, Block No. BG-8, AA-1B, New Town, Kolkata 700 156, West Bengal, India.  
Ph. +91 33 4008 2772 | Fax: +91 33 4006 2773 | E-mail: sales@sovasolar.com

