


# I'M • SOLAR® Performance Serie

375W Black



120 cells monocrystallines

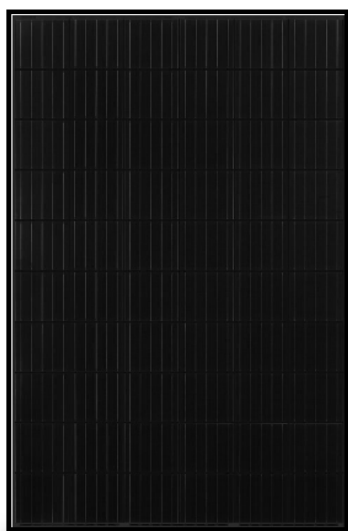

Anti-PID treatment / Hotspot protection



Positive tolerance 0-5%



high resistance to temperature variations



30 years warranty

## Warranty I'M SAFE®

You are 3 times better protected

### Serenity warranty

Serenity guarantee protects you against all mechanical, meteorological, fire and theft hazards. All I'M.SOLAR® solar panels benefit from this insurance for a period of 5 years. Serene, you are now insured against any unpredictable and sudden damage that can degrade your equipment.

### Quality warranty

All I'M.SOLAR® products have a manufacturer's warranty. This manufacturer's warranty ensures against any manufacturing defect, quality defect and malfunction over a specific period of time. For solar panels the manufacturer's warranty is 30 years.

### Linear performance warranty

I'M.SOLAR® guarantees a low linear performance decrease of only 0.7% / W each year. We are one of the few manufacturers in Europe to produce our own photovoltaic cells we are able to guarantee the performance of our solar panels over 25 years, applicable every year.



## TECHNICAL FEATURES

Type	IM.S-375MB
Maximum Power (PMPP)	375 Wp
Maximale tension (VMPP)	34 V
Rated current (IMPP)	10,74 A
Open circuit voltage (VOC)	41,30 V
Current short circuit (SIC)	11,30 A
Tolerance	0-5%

## TERMS OF USE

Maximale tension	DC 1000V (TUV)
Operating temperature	-40°C / +85°C
Maximum reverse current	16 A
Maximum wind load/ snow max	2400 Pa / 5400 Pa
Class of protection	67
Security class	II

## MECHANICAL CHARACTERISTICS

Dimensions cells	166x166mm
Cell's number	6x20
Thickness glass	3,2 mm reinforced solar glass
Mass	20 kg
Dimensions ( L x W x H )	1772 x 1052 x 35mm
Junction box	Plastic, IP67, ventilated
Cable length	1 m
Cable section	4 mm
Number of diodes	3
connector	MC4
Frame	anodized aluminum black color
Packaging	30 pcs./palette

## TEMPERATURE COEFFICIENTS

Temperature coeff of temperature	( $\beta$ ) -0,242 % / K
Temperature coeff of current	( $\alpha$ ) +0,044 % / K
Temperature coeff of power	( $\delta$ ) -0.35% / K

