



Inspiring green-energy since 2003

PERC Technology

AE LARGE CELL BIFACIAL MONOCRYSTALLINE PV MODULES WITH TRANSPARENT BACKSHEET AE HM6-60 Series 305W-335W

60 CELLS	 PID RESISTANT	 SALT CORROSION RESISTANT	 SAND RESISTANT	$\frac{NH_3}{S}$ AMMONIA RESISTANT	 HIGHLY STABLE AND TOUGH
--------------------	----------------------	---------------------------------	-----------------------	--	--------------------------------


GERMAN QUALITY
AE Solar photovoltaic modules are produced using high quality materials, automated robotic lines, German technology and standards.

PLUS-SORTING
Higher yield due to plus-sorting from 0 up to +5 Wp guarantees the high system efficiency and yield stability.

PERFORMANCE GUARANTEE
AE Solar assures high investment, security and warranty claims by providing linear performance guarantee of 30 years and 12 years of product warranty.

CERTIFICATES
Lining with international standards, AE Solar Photovoltaic modules are tested and certified under extreme stress conditions and it can bear harsh environment influences.

OUR PERFORMANCE GUARANTEE

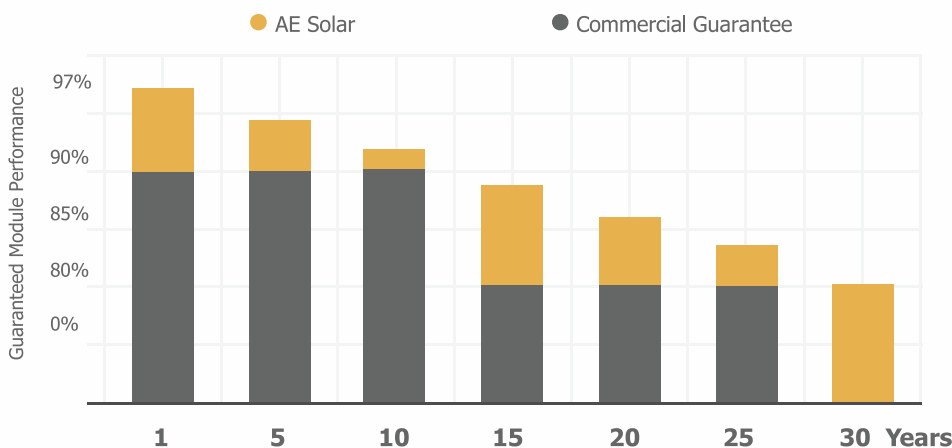

30
years
Performance Guarantee

12
years
Product Warranty



Deutsche
Qualität
Garantiert

TECHNICAL DATA

AE HM6-60 Series 305W-335W

SPECIFICATIONS

AE305HM6-60 AE310HM6-60 AE315HM6-60 AE320HM6-60 AE325HM6-60 AE330HM6-60 AE335HM6-60

Nominal Max. Power	Pmax (Wp)	305	310	315	320	325	330	335
Maximum power voltage	Vmp(V)	32.80	33.00	33.20	33.40	33.61	33.81	34.02
Maximum power current	Imp (A)	9.30	9.40	9.49	9.59	9.68	9.76	9.85
Open-circuit voltage	Voc(V)	40.31	40.50	40.70	40.90	41.10	41.31	41.49
Short-circuit current	Isc (A)	9.83	9.92	10.04	10.15	10.20	10.37	10.49
Module efficiency	(%)	18.39	18.69	18.99	19.30	19.60	19.90	20.20
Power tolerance	Pmax (Wp)	0 / + 5						
Maximum system voltage DC	(V)	1000						
Maximum series fuse rating	(A)	15						
Operating temperature	(°C)	-40 to +85						
Temp. coefficients of Pmax	(%/°C)	-0.37						
Temp. coefficients of Voc	(%/°C)	-0.28						
Temp. coefficients of Isc	(%/°C)	0.048						
Nom. Operating cell temp.(NOCT)	(°C)	45±2						

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	Mono-crystalline 158.75 x 158.75mm
No. of cells	60 (6 x 10)
Dimensions	1665 x 996 x 35 mm
Weight	18.5 KG
Junction box	IP 67 rated
Output cable	1 x 4.0mm ² , 900mm length or customised
Connector type	MC 4 / MC 4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg/m ²
Mechanical load	5400 Pa / 550 kg/m ²



PACKAGING INFORMATION

Packing configuration	64 pcs / double pallet
Loading Capacity	896 pcs / 40HQ
Size / pallet (mm)	1695 X 1135 X 2395
Weight	1283 kg / double pallet

DIMENSIONS

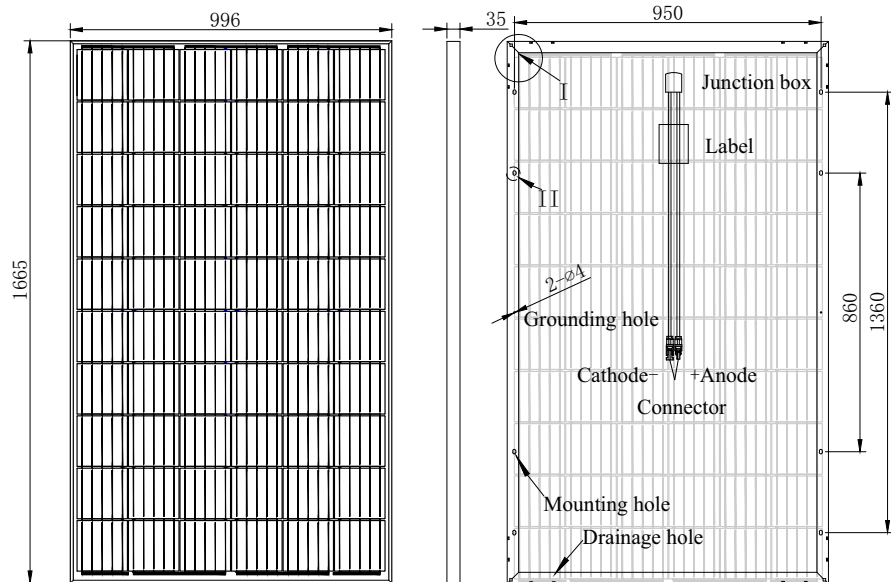

CERTIFICATES

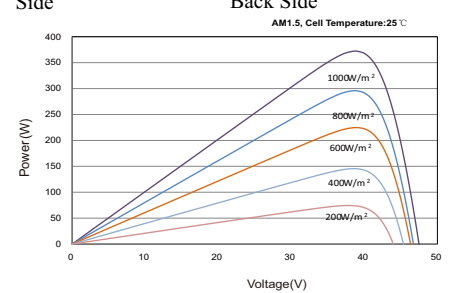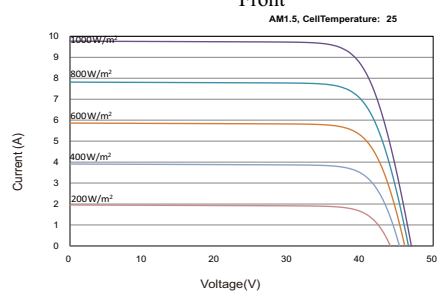

AES-DSH2019 V.002
All rights reserved. Specifications included in this data sheet are subject to change without notice.

AE Solar GmbH

Messerschmittring 54
86343 Königsbrunn
Germany

Tel.: +49 8231 92 92 52 2
Fax: +49 8231 97 82 68 9
Email: sales@ae-solar.com
Web: www.ae-solar.com