

AEG

AEG PREMIUM SERIES

AS-M3207U-S(G12) / ULTRA BLACK SHINGLED PHOTOVOLTAIC MODULE

Characteristics



Power range: 430-435 Wp
Shingled-cell technology
Suitable for: residential / commercial installations

Product Name Code (PNC)



AS-M3207U-S(G12)-430/435/HV
(black backsheet, black frame, black wiring)

Extra peace of mind



Extensive certifications and rigorous Quality Control
15 years product warranty
25 years performance warranty

Advantages



More converting surface, more energy outputs
Outstanding sleek optics
Extra long cables for greater installation flexibility

AS-M3207U-S(G12) / ULTRA BLACK SHINGLED PHOTOVOLTAIC MODULE

PRODUCT SERIES & NAMECODE (PNC)	
AEG PREMIUM SERIES	
AS-M3207U-S(G12)-430/435/HV	
black frame, black backsheet, black wiring	

ELECTRICAL CHARACTERISTICS AT STC ^{1,2}			
Nominal Power (Pmax)	[Wp]	430	435
Power Sorting ³	[W]	0-5	0-5
Maximum Power Voltage (Vmp)	[V]	36.1	36.2
Maximum Power Current (Imp)	[A]	11.92	12.02
Open Circuit Voltage (Voc)	[V]	43.5	43.6
Short Circuit Current (Isc)	[A]	12.68	12.79
Module Efficiency (ηm)	[%]	20.7	20.9
Maximum System Voltage	[V]	1500	1500
Series Fuse Maximum Rating	[A]	25	25

ELECTRICAL CHARACTERISTICS AT NMOT ⁴			
Maximum Power (Pmax)	[W]	324	328
Maximum Power Voltage (Vmp)	[V]	34.4	34.5
Maximum Power Current (Imp)	[A]	9.41	9.49
Open Circuit Voltage (Voc)	[V]	41.5	41.6
Short Circuit Current (Isc)	[A]	10.23	10.32

MECHANICAL CHARACTERISTICS			
Solar cells	monocrystalline [pcs]	320	
	Dimensions [mm]	G12-based shingles	
Front glass	high-transparency		
	Thickness [mm] / [in]	3.2 / 0.126	
Backsheet	Black		
Encapsulant	EVA		
Frame	Anodized aluminum alloy	Black	
Junction box	Split-type		
	Bypass diodes	2	
UV-resistant cables	Length [mm] / [in]	1400 / 55.12	
	Section [mm ²]	4	
Connectors	MC4		
Dimensions	H x L x W [mm]	1899 x 1096 x 30	
	H x L x W [in]	74.76 x 43.15 x 1.18	
Weight	[kg] / [lbs]	21.8 / 48.04	
Maximum load	Wind / Snow [Pa]	2400 / 5400	
Fire Class	Class C		



PACKAGING		
Packing configuration	[pcs/pallet]	36
Loading capacity	[pcs/40 ft container]	864

NOTES	
1-Standard Test Conditions (STC): Irradiance 1000 W/m ² , Air Mass AM = 1.5, Cell Temperature 25°C	
2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±3%	
3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power	
4-NMOT: Nominal operating temperature of module, Irradiance 800 W/m ² , Wind Speed 1m/s, Ambient Temperature 20°C, Air Mass AM=1.5	
5-Full text of the Warranty Terms available at: www.aeg-industrialsolar.de . The Extended Warranty is a separate offer. If not offered by your distributor, the standard warranty conditions apply.	
6-(PRE/GB) No less than 98% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.55% per year thereafter, ending with 84.8%.	
Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (±0.079") / Version 2022.05.V1.EN © Solar Solutions Group. Specifications in this datasheet are subject to change without notice.	
AEG is a registered trademark used under license from AB Electrolux (publ).	

CERTIFICATIONS		
System	ISO 9001, ISO 14001, ISO 45001	
Product	IEC/EN 61215 (-1, 1-1: 2016); IEC 61215 -2:2016, EN 61215 -2:2017+AC2017+AC2018; IEC 61730 (-1, -2:2016); EN 61730-1/-2:2018+AC 2018	

WARRANTIES		
Product warranty ⁵	[years]	15 (opt. ext. to 20)
Performance warranty (linear) ⁶	[years]	25

TEMPERATURE CHARACTERISTICS		
NMOT	[°C]	42.3 (±2)
Pmax Temp. Coefficient (γ)	[%/°C]	-0.34
Voc Temp. Coefficient (β)	[%/°C]	-0.27
Isc Temp. Coefficient (α)	[%/°C]	0.04
Operating temperature	[°C]	-40~+85

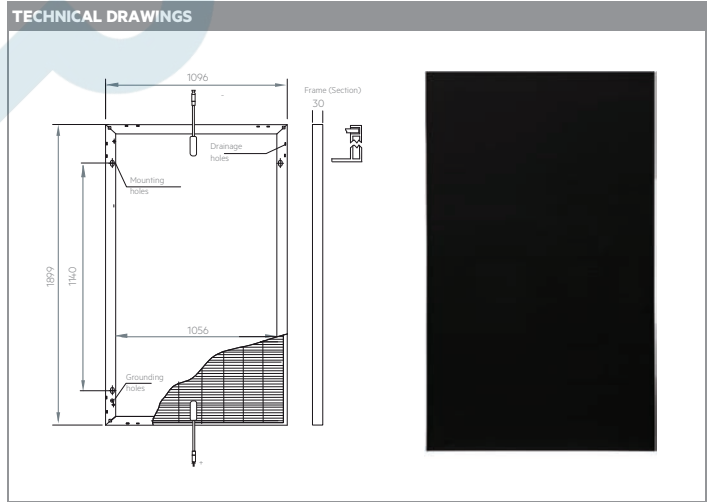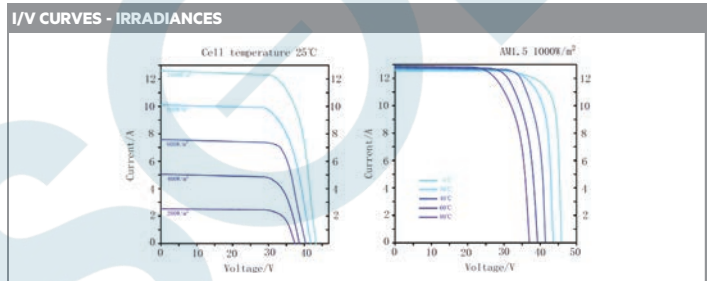

CONTACT US

SOLSOL s.r.o. | Králova 298/4 | Brno 616 00 | Czech Republic
 Tel: +420 773 576 737 | E-mail: sales@solsol.cz | www.solsol.cz